
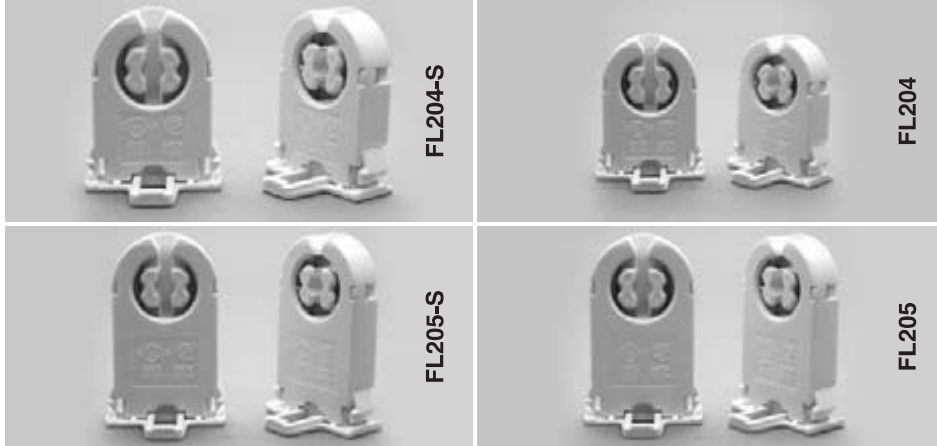



FLUORESCENT LAMPHOLDERS MEDIUM BI-PIN G13 FOR T-8/T-12 LAMPS

D22

FL204 Series Low Profile
FL205 Series Tall Profile, T-8 Only

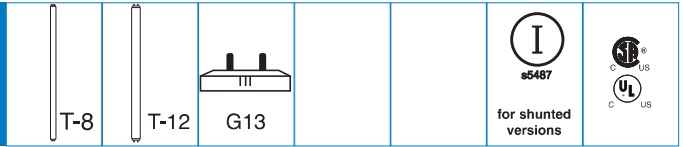

- White polycarbonate body, rated 110°C
- Turn type lock, low profile or tall for T8/T10/T12 lamps
- Quick connect push-in wire terminals for 18 AWG solid wire 5/16"
- For 0.23" - 0.040" (0.6 mm - 1.0 mm) panel thickness
- Two wire ports per terminal for easy harness wiring
- Rated 660W, 600V, suitable for all new HO lamps
- Available shunted for use with instant start electronic ballasts; saves time and makes wiring easier
- Many models to choose from
- cCSA_{US} Certified / cUL_{US} Listed
- Circle I s5487 Pending for shunted version(s)



Linear Fluorescent

<p>FL204 Flexible Snap-In Shoulder</p>	<p>FL204-S Flexible Shoulder Shunted</p>
<p>FL204-N Flexible Snap-In Shoulder, Locating Nib</p>	<p>FL204-SN Flexible Shoulder Shunted, Locating Nib</p>
<p>FL205 Flexible Snap-In Shoulder, T-8 Only</p>	<p>FL205-S Flexible Shoulder Shunted, T-8 Only</p>
<p>FL205-N Flexible Snap-In Shoulder, T-8 Only, Locating Nib</p>	<p>FL205-SN Flexible Shoulder Shunted, T-8 Only, Locating Nib</p>

* Add "-S" after product code for internal shunted version
 Δ Add "-C" after product code for captive nut on models with nut slot