


4

3

DWG NO. 1000604 SH 1

1

REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

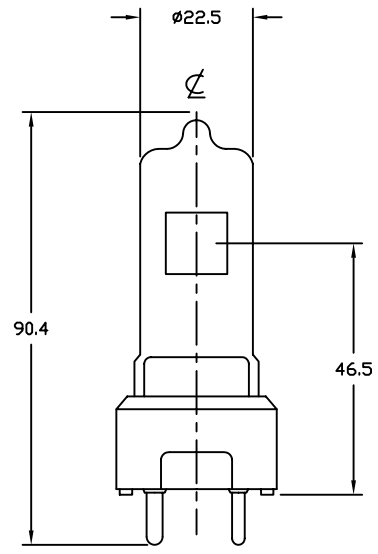

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
VOLTAGE	120 V
WATTAGE	650 W
TOTAL LUMEN	17500 Lm
COLOR TEMP.	3200 K
BASE TYPE	GY9.5
AVERAGE LIFE	200 HRS
FILAMENT TYPE	C-13D
BURN POSITION	Any

NEXT ASSY	USED ON

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS		
LIST OF MATERIALS							
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630			
DECIMALS .X	± -	APPROVALS	DATE				
.XX	± -	DRAWN	R.AMPARO	08/30/99	TITLE FRK JCS120V-650WC/UA		
.XXX	± -	CHKD	D.GILCZYNSKI	08/30/99			
ANGLES	± -	ENGR					
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		MFG					
MATERIAL		QUAL			SIZE		
COMPOSITE		DSGN ACTVY			CODE IDENT NO.		
FINISH		GOVT ACTVY			DWG NO.		
					B	FRK	1000604
					SCALE	WEIGHT	SHEET
					NONE		1 OF 1

D

D

C

C

B

B

A

A