


SPECIFICATIONS

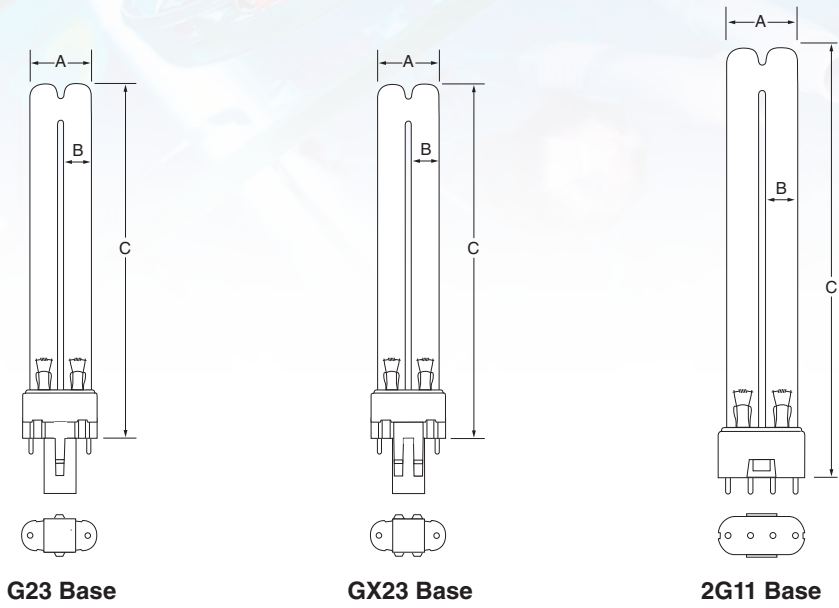

Watts (W)	Ordering Code	Lamp Description	Base	Volts (V)	Lamp Current (A)	Dimensions						Spectral Peak (nm)	UV Output (W)	Avg Rated Life (h)
						Length (A)		Diameter (B)		Length (C)				
						(mm)	(in)	(mm)	(in)	(mm)	(in)			
T4														
5.5	3000321	GPX5	G23	35	0.180	28.0	1.10	13.0	0.51	85.0	3.35	253.7	1.2	8000
9.0	3000304	GPX9	G23	59	0.180	28.0	1.10	13.0	0.51	145.0	5.71	253.7	2.4	8000
13.4	3000323	GPX13	GX23	59	0.285	28.0	1.10	13.0	0.51	170.0	6.69	253.7	3.6	8000
T6														
18.0	3000324	GPL18K	2G11	58	0.375	40.0	1.57	20.0	0.51	225.0	8.86	253.7	5.5	8000
36.0	3000339	GPL36K	2G11	106	0.435	40.0	1.57	20.0	0.51	415.0	16.33	253.7	12.0	8000

Average lamp life and output measurements taken under laboratory conditions in open air.
Lamps are cycled for 2 hours 45 minutes on / 15 minutes off when testing life and output.
Lamp data is for reference only. Actual lamp performance depends on system design and operating conditions.

WARNING! Dangerous ultraviolet radiation!
Protect your eyes and skin when operating Ultraviolet lamps. Equipment should be designed to completely screen or filter UV-C radiation from direct human or animal exposure. For professional use only: UV-C can degrade or cause photochemical effects on inorganic and organic materials including plastics, wire insulation, and rubber.

CALIFORNIA PROPOSITION 65 WARNING: These products can expose you to Mercury, which is known to the State of California to cause cancer, birth defects, and other reproductive harm. For more information, please go to: www.p65warnings.ca.gov.

 contains mercury
contient du mercure

Manage in Accord with Disposal Laws
www.lamprecycle.org 1-800-895-8842

