

H. H. FLUORESCENT PARTS, INC.


LOW SILHOUETTE STRAIGHT INSERTION LAMPHOLDER

For "U" Shaped and Standard Medium Bi-Pin Lamps

"PRESSURE LOCK"

660W 600V

STRIP LENGTH
3/8"

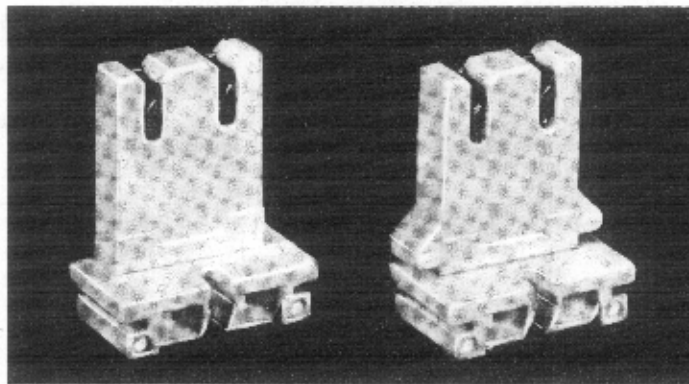

1650RW — 1750RW

1650SW — 1750SW

Listed by
Underwriter's Laboratories, Inc.
File # E-20650


C.S.A. Approved
File # LR 25026

KNIFE EDGE CONTACTS



CAT. NO.	APPLICATION	HARDWARE	STD. PKG.	WT. LBS.
1650RW	For Flush Mtg.	4/36 x 7/16" Sc & Hex. Palnut	1000	25
1650SW	For Slide on Mtg. 20GA Slot	None Required	1000	25
1650SW-1	For Slide on Mtg. 18GA Slot	None Required	1000	25

CAT. NO.	CIRCUIT INTERRUPTING TYPE	HARDWARE	STD. PKG.	WT. LBS.
1750RW	For Flush Mtg.	4/36 x 7/16" Sc & Hex. Palnut	1000	25
1750SW	For Slide on Mtg. 20GA Slot	None Required	1000	25
1750SW-1	For Slide on Mtg. 18GA Slot	None Required	1000	25

DIMENSION SKETCHES

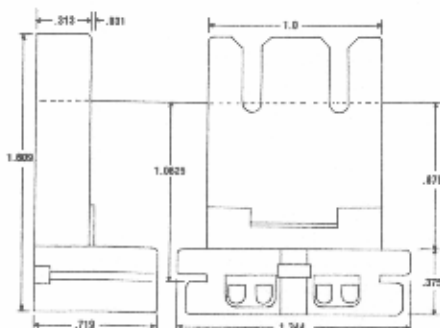

1650RW — 1750RW

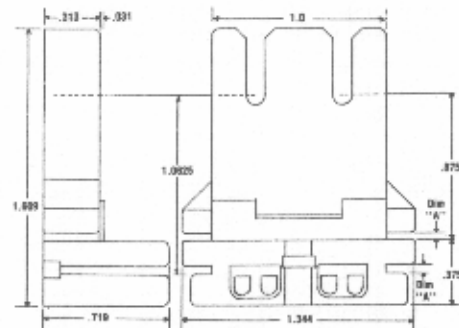

Dim "A" 18 GAUGE .052-.057
20 GAUGE .049-.044

1650SW — 1750SW