



HCL Select

LED Selectable High Bay Gen 2 **CONTRACTOR XP**

Due to continuous product improvements, specification and/or equipment updates may change without notice.



(Images are shown for illustration purposes only)

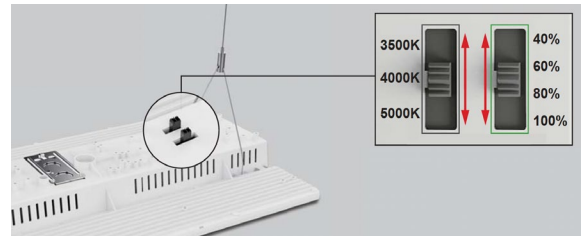

HCL Select (HCL LS360 model)

CCT Color and Lumen/Wattage Selectable Switches

The **HCL Selectable Linear High Bay** is compact, light weight, powerhouse of a linear highbay. Switch selectable driver allows for a future-proof investment so that your lighting needs continue to be met offering a range of lumen outputs and color options. A tough housing design and easy installation makes the **HCL Select** a contractor's dream come true at a price that'll drive away the competition. It's simple, with the **HCL Select LED Linear High Bay** - your experience matters.

Catalog Number	Description	Lumens	Watts	CCT	Voltage
HCL LS240 G2 FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 12,000 - 24,000 Lm	Selectable 85 - 160 W	Selectable 3500K - 5000K	120V - 277V
HCL LS240 G2 HVU FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 12,000 - 24,000 Lm	Selectable 85 - 160 W	Selectable 3500K - 5000K	347V - 480V
HCL LS360 G2 FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 18,000 - 38,100 Lm	Selectable 115- 260 W	Selectable 3500K - 5000K	120V - 277V
HCL LS360 G2 HVU FSK	HCL Compact High Bay, 4 Level Wattage Adjustable, Gen 2, CCT Selectable, White finish	Selectable 18,000 - 38,100 Lm	Selectable 115- 260 W	Selectable 3500K - 5000K	347V - 480V

ORDERING GUIDE

Example: HCL LS360 G2 FSK

Fixture Type	Selectable Lumen Output	Generation	Voltage	Selectable CCT	Finish	Options - Emergency Backup	Options - Controls	Options - Accessories
<ul style="list-style-type: none"> HCL Compact High Bay 	<ul style="list-style-type: none"> LS240 <ul style="list-style-type: none"> 12,000 Lm / 84 W 14,000 Lm / 100 W 18,000 Lm / 130 W 24,000 Lm / 160 W LS360 <ul style="list-style-type: none"> 18,900 Lm / 115 W 26,300 Lm / 165 W 32,900 Lm / 220 W 38,100 Lm / 260 W 	<ul style="list-style-type: none"> G2 Second Generation 	<ul style="list-style-type: none"> BLANK <ul style="list-style-type: none"> 120-277 V HVU <ul style="list-style-type: none"> 347-480 V 	<ul style="list-style-type: none"> FSK <ul style="list-style-type: none"> 3500K 4000K 5000K 	<ul style="list-style-type: none"> BLANK <ul style="list-style-type: none"> White 	<ul style="list-style-type: none"> BLANK <ul style="list-style-type: none"> No backup. EMA-DH32D-UNV-145 <ul style="list-style-type: none"> Emergency backup, field installed (120-277V) EMA-LH40D-HVU-400 <ul style="list-style-type: none"> Emergency backup (40W) for HVU model only, no sensor option, pendant mount only. 	<ul style="list-style-type: none"> BLANK <ul style="list-style-type: none"> None Bluetooth Controls <ul style="list-style-type: none"> MSB-DCE-06 OSLG sync Bluetooth motion sensor <ul style="list-style-type: none"> L3 Medium Bay lens L7 High Bay lens FCB-DCE-02 OSLG sync Bluetooth Plug-in Controller Node Basic Controls <ul style="list-style-type: none"> MS-DCE-09-L7 Motion sensor RM-06 Remote control for motion sensor. 	<ul style="list-style-type: none"> BLANK <ul style="list-style-type: none"> None HCL-SMB <ul style="list-style-type: none"> Surface Mount Kit HCL-PMB <ul style="list-style-type: none"> Pendant Mount Kit WG-HCL11 <ul style="list-style-type: none"> Wire guard for HCL LS240 WG-HCL12A <ul style="list-style-type: none"> Wire guard for HCL LS360 SPD-277 <ul style="list-style-type: none"> Surge protector (120-277V) SPD-480 <ul style="list-style-type: none"> Surge protector (for HVU model) CS1 <ul style="list-style-type: none"> 6" Straight Blade Plug (120-277V) CS2 <ul style="list-style-type: none"> 6" Twist-Lock Plug (120-277V) CS3 <ul style="list-style-type: none"> 6" 600V 14/2 MC Solid Cable - no plug CS4 <ul style="list-style-type: none"> 6" 600V S0 Black Cord, no plug, 18/3 CS5 <ul style="list-style-type: none"> 6" 18 Gauge, 5 Conductors, no plug

Performance Information

Series Number	Power Percentage	Wattage	3500K		4000K		5000K	
			LUMENS	LPW	LUMENS	LPW	LUMENS	LPW
HCL LS240	100%	160 W	24,000 Lm	150 Lm/W	25,000 Lm	156 Lm/W	24,500 Lm	142 Lm/W
	80%	130 W	18,000 Lm	138 Lm/W	19,000 Lm	146 Lm/W	18,500 Lm	142 Lm/W
	60%	100 W	14,000 Lm	140 Lm/W	15,000 Lm	150 Lm/W	14,500 Lm	145 Lm/W
	40%	85 W	12,000 Lm	141 Lm/W	13,000 Lm	153 Lm/W	12,500 Lm	147 Lm/W
HCL LS360	100%	260 W	36,000 Lm	138 Lm/W	38,100 Lm	147 Lm/W	37,000 Lm	142 Lm/W
	80%	210 W	31,000 Lm	148 Lm/W	32,900 Lm	157 Lm/W	31,900 Lm	152 Lm/W
	60%	165 W	25,000 Lm	152 Lm/W	26,300 Lm	159 Lm/W	25,500 Lm	155 Lm/W
	40%	115 W	18,000 Lm	157 Lm/W	18,900 Lm	164 Lm/W	18,300 Lm	159 Lm/W

Specifications

Housing

One-piece die-cast aluminum for quality and performance.

Ambient Temperature

Suitable for use in -40° C to 50° C (-40° F to 122° F).
With Emergency Backup: 5° C to 50° C (41° F to 122° F).

Mounting

Steel wire cable mount (default), surface mount, and pendent installation with conduit.

Efficacy

Up to 164 lumens per watt.

CCT and CRI

Field selectable: 3500K, 4000K, and 5000K.
CRI 80.

Lifespan*

Calculated L70 > 123,000 Hours @ 25°.

Lumen Output

Field selectable: 12,000 - 38,100 Lm.

Warranty

10-year limited warranty. Comprehensive warranty terms can be located on www.slgus.com.

Electrical

Standard 120V - 277V

0-10V dimming standard with a dimming range of 100% to 10%.


HVU High Voltage 347V - 480V

Certifications

UL Listed for damp locations. FCC compliant. Design Lights Consortium® (DLC) Premium 5.1 listed product.


Dimensions

HCL Select

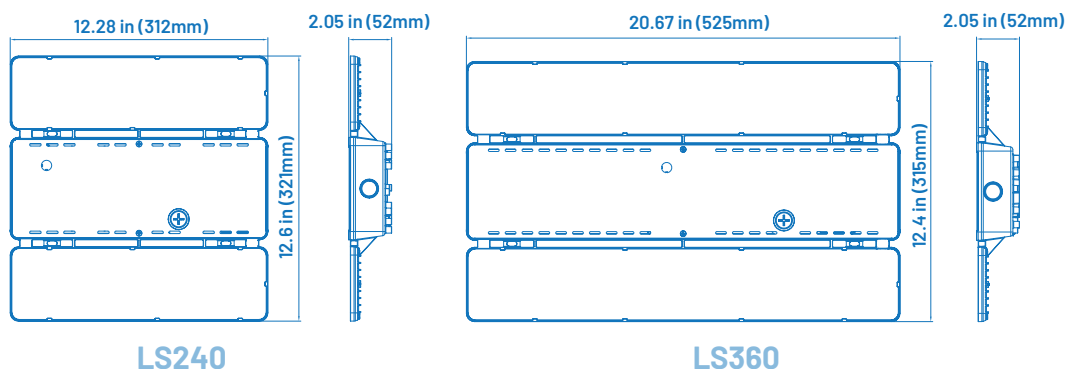


*Calculated hours are based on TM-21 test projections and all components used during the time of testing. The calculated hours are not associated with our warranty policy.


Photometric

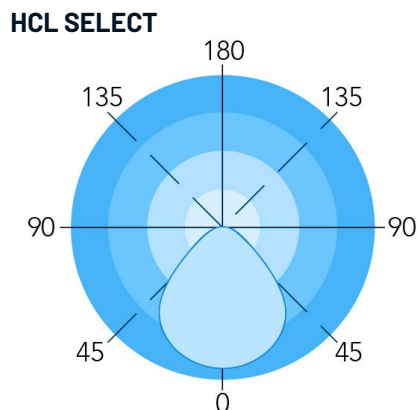


Mounting

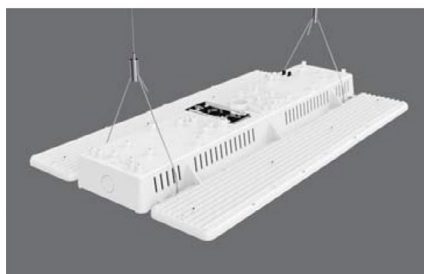

Standard Aircraft Cable Mounting
(Accessories included)

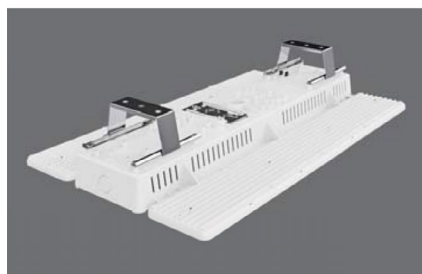

Surface Mount

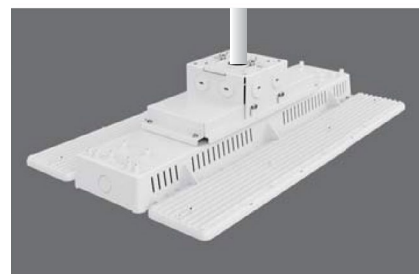

Conduit Pendant Mount

Accessories



MSB-DCE-06

Bluetooth Motion Sensor with controller



FCB-DCE-02

Bluetooth Controller




MS-DCE-09-L7

Motion Sensor



HCL-PMB

Pendant with 3/4" conduit



Wire Guard

HCL Select



Electrical Load

	Power Setting	Wattage	Current (A)				HVU	Current (A)	
			120V	208V	240V	277V		347V	480V
HCL LS240	Low	85 W	0.71	0.41	0.35	0.35	HVU	0.25	0.18
	Med	100 W	0.83	0.48	0.42	0.36		0.29	0.21
	High	130 W	1.1	0.63	0.54	0.47		0.37	0.27
	Max	160 W	1.33	0.77	0.67	0.58		0.46	0.33
HCL LS360	Low	115 W	0.96	0.55	0.48	0.42		0.33	0.24
	Med	165 W	1.38	0.79	0.69	0.60		0.48	0.34
	High	210 W	1.75	1.01	0.88	0.76		0.61	0.44
	Max	260 W	2.17	1.25	1.08	0.94		0.75	0.54

DLC Product ID

HCL LS240 G2 FSK	S-LFZ1LP
HCL LS360 G2 FSK	S-QWLOEM

Shipping Information



Product Number	Individual Box Size	Individual Box Weight	# Per Carton	# Per Pallet
HCL LS240 G2 FSK	14.57" x 13.19" x 2.36"		1	-
HCL LS360 G2 FSK	12.4" x 2" x 20.7"	6.34 lbs	1	138

Bluetooth Motion sensor



MSB-DCE-06
(Pictured with L7 lens)

Specifications:

Input Voltage
DC 12V

IP Rating
IP66

Input Current
50mA Max

Input Power
0.6 W

Output Voltage
DC 10V

Output Current
10mA Max

Output Power
0.1W

Sinking Current
10mA Max

Bluetooth Transmit
200 ft. Max

Radio Frequency
2.4 GHz +- 75 MHz

Mounting Height
20 - 40 ft

Dimming
Class 2, 0-10V DC 10mA Max

Detection Range
40 - 80 ft

Operating Temperature
-30°C to 55°C (-22°F to 131°F)

Warranty
5 Year warranty

Commissioning

This Bluetooth sensor/controller is easily commissioned via the SLG Sync app, available for download on Google Play and the App Store.

App Download:



For commissioning guide and more information visit:

www.slgsync.com

Basic Motion sensor



MS-DCE-09-L7

Specifications:

Input Voltage
DC 12V

Input Current
<30mA

Voltage Range
10 - 15VDC

Output Power
0.1W

Detection Angle
120°

IP Rating
IP65

Detection Range
≥ 9 ft

Mounting Height
Up to 40 ft

Dimming
0-10V

Operating Temperature
-20°C to 60°C (-4°F to 140°F)

Warranty
5 Year warranty

Commissioning

This basic sensor is commissioned via the RM06 remote. Either pre-commissioned or commissioned on site.

