


SPECIFICATION SHEET : **IH2-UNV-270-T8**

This Is An Original Product From Fulham Co., Inc

Description : Universal Voltage, Auto Restart With Cold Starting Feature For Refrigeration Application/s.

This Ballast Will Operate Following Lamps.




F58T8, F70T8


ELECTRICAL DATA (120V APPLICATION)

INPUT VOLT: 120V $\pm$ 10% , 50/60Hz						
LAMP WATTS/TYPE	F58T8	F70T8	F58T8	F70T8	-	-
LAMPS OPERATED	1	1	2	2		
INPUT POWER (W)	66	78	133	157		
LINE CURRENT	0.56	0.65	1.11	1.31		
POWER FACTOR	> 0.9					
THD	< 10 %					
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)					
SOUND RATING	" A "					
BALLAST TYPE	PROGRAMMED PREHEAT START					
VOLTAGE TRANSIENTS	ANSI 62.41					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	DEACTIVATED LAMP PROTECTION					
MIN. OPERATING TEMP	-30 $^{\circ}$ C (-22 $^{\circ}$ F)					
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)					
TYPE	"CC"					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR					

MECHANICAL DATA

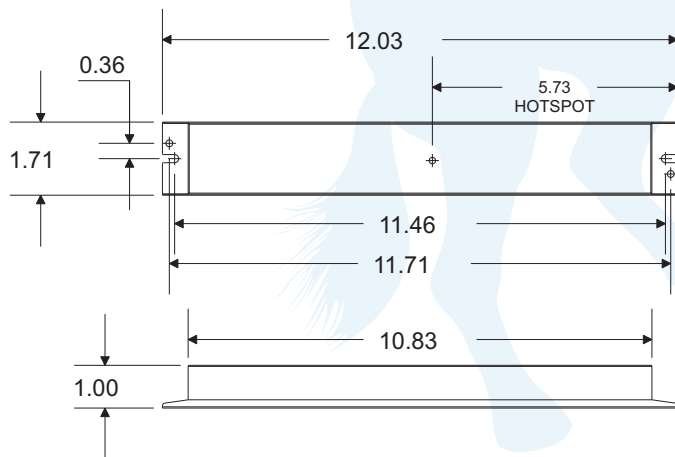

WIRING DIAGRAM

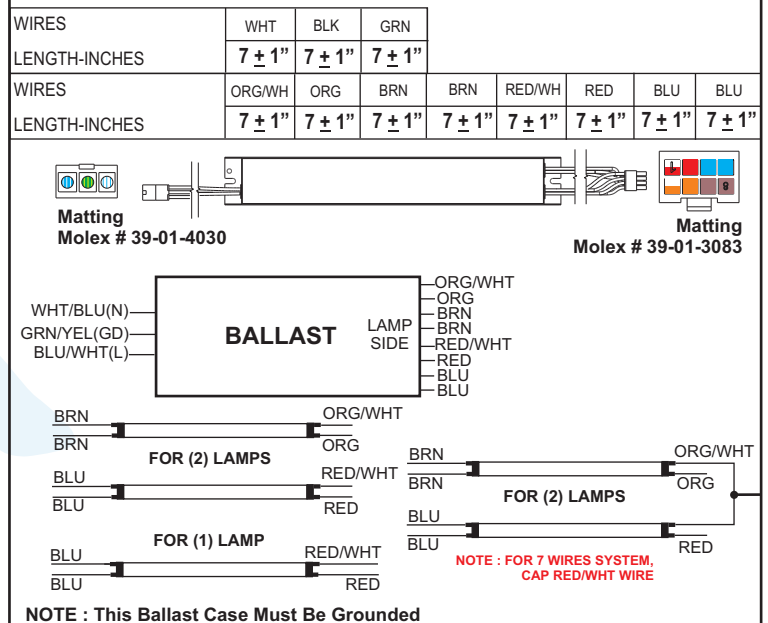


SPECIFICATION SHEET : IH2-UNV-270-T8

This Is An Original Product From Fulham Co., Inc

Description : Universal Voltage, Auto Restart With Cold Starting Feature For Refrigeration Application/s.

This Ballast Will Operate Following Lamps.




F58T8, F70T8

ELECTRICAL DATA (230V APPLICATION)


INPUT VOLT: 230V $\pm$ 10%, 50/60Hz						
LAMP WATTS/TYPE	F58T8	F70T8	F58T8	F70T8	-	-
LAMPS OPERATED	1	1	2	2		
INPUT POWER (W)	66	77	130	152		
LINE CURRENT	0.30	0.34	0.57	0.67		
POWER FACTOR	> 0.9					
THD	< 10 %					
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)					
SOUND RATING	" A "					
BALLAST TYPE	PROGRAMMED PREHEAT START					
VOLTAGE TRANSIENTS	ANSI 62.41					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	DEACTIVATED LAMP PROTECTION					
MIN. OPERATING TEMP	-30 °C (-22 °F)					
MAX. CASE TEMP	70 °C (158 °F)					
TYPE	"CC"					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR					

MECHANICAL DATA

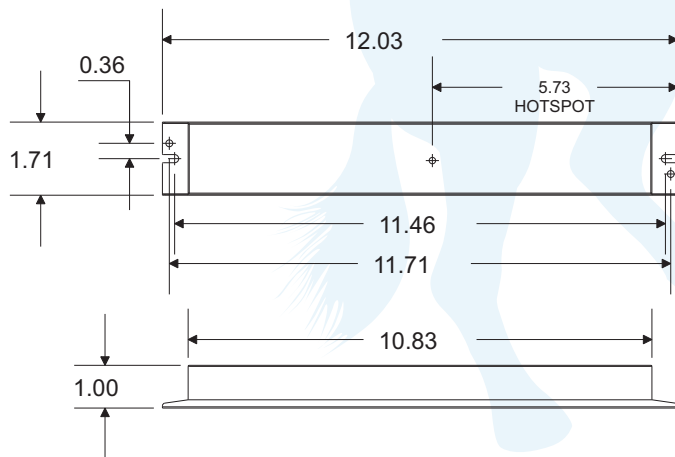

WIRING DIAGRAM

WIRES	WHT	BLK	GRN					
LENGTH-INCHES	7 $\pm$ 1"	7 $\pm$ 1"	7 $\pm$ 1"					
WIRES	ORG/WH	ORG	BRN	BRN	RED/WH	RED	BLU	BLU
LENGTH-INCHES	7 $\pm$ 1"	7 $\pm$ 1"	7 $\pm$ 1"	7 $\pm$ 1"	7 $\pm$ 1"	7 $\pm$ 1"	7 $\pm$ 1"	7 $\pm$ 1"

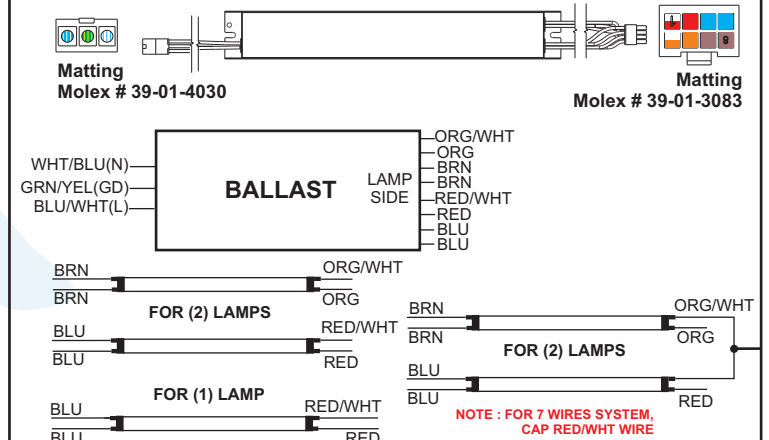


NOTE : This Ballast Case Must Be Grounded

SPECIFICATION SHEET : IH2-UNV-270-T8

This Is An Original Product From Fulham Co., Inc

Description : Universal Voltage, Auto Restart With Cold Starting Feature For Refrigeration Application/s.

This Ballast Will Operate Following Lamps.




F58T8, F70T8

ELECTRICAL DATA (277V APPLICATION)

INPUT VOLT: 277V $\pm$ 10% , 50/60Hz						
LAMP WATTS/TYPE	F58T8	F70T8	F58T8	F70T8	-	-
LAMPS OPERATED	1	1	2	2		
INPUT POWER (W)	66	77	130	152		
LINE CURRENT	0.25	0.29	0.48	0.56		
POWER FACTOR	> 0.9					
THD	< 10 %					
CURRENT CREST FACTOR	< 1.7					
EMI/RFI COMPLIANCE	FCC PART 18-A (Non-Consumer)					
SOUND RATING	" A "					
BALLAST TYPE	PROGRAMMED PREHEAT START					
VOLTAGE TRANSIENTS	ANSI 62.41					
INPUT/PROTECTION	FUSE					
OUTPUT/PROTECTION	DEACTIVATED LAMP PROTECTION					
MIN. OPERATING TEMP	-30 $^{\circ}$ C (-22 $^{\circ}$ F)					
MAX. CASE TEMP	70 $^{\circ}$ C (158 $^{\circ}$ F)					
TYPE	"CC"					
APPROVALS/CLASS	UL /cUL LISTED, CLASS " P ", 1 OUTDOOR					

MECHANICAL DATA

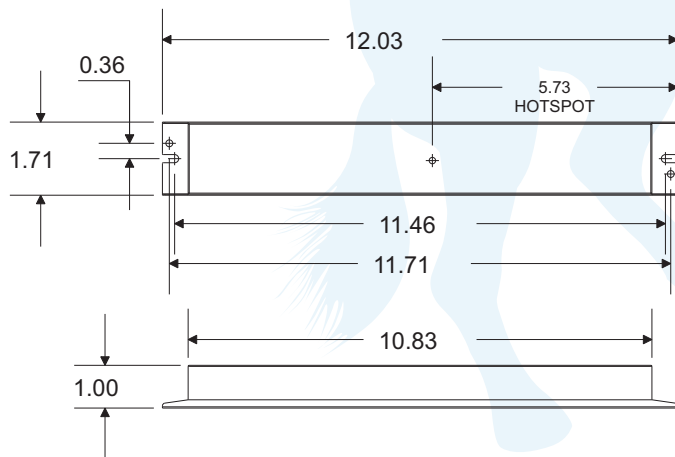

WIRING DIAGRAM

