


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

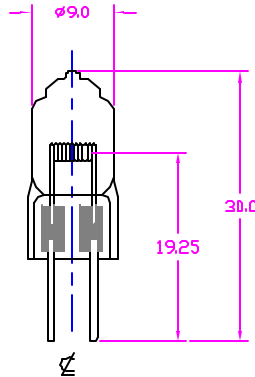

NOTES:

1. ALL DIMENSIONS ARE IN MM UNLESS OTHERWISE SPECIFIED.
2. SEAL TEMP SHOULD BE MAINTAINED BELOW 350°C.
3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Carrizo Ave. Cypress, CA 90630	
DECIMALS .X ±		APPROVALS	DATE		
.XX ±		R.AMPARO	02/05/01	TITLE JC6V-30W/G4 HALOGEN LAMP	
.XXX ±		ENGR	02/05/01		
ANGLES		DRW		SIZE	
DRILLED HOLES PER AND 10387		K.CORDERO		CODE IDENT NOS	
REMOVE BURRS AND SHARP EDGES		ENGR		DWG NO.	
ALL DIMENSIONS AFTER PLATING		DWT		1000867	
MATERIAL		QUAL		SCALE	
COMPOSITE		FINISH		NONE	
NEXT ASSY		DRW ACTVY		WEIGHT	
USED ON		DWT ACTVY		SHEET	
APPLICATION		SCALE		1 OF 1	

CHARACTERISTICS	
DESIGN VOLTS	B V
DESIGN WATT	30 W
LUMEN OUTPUT	800 Lm
COLOR TEMP	3300 K
BASE TYPE	G4
AVERAGE LIFE	50 HRS
FILAMENT TYPE	C-B
BURN POSITION	ANY