



# JUNO SLIMFORM™ LED SURFACE MOUNT DOWNLIGHTS

FOR J-BOX INSTALLATION  
5", 7", 11", 13" ROUND

**JSF SERIES**

Project: \_\_\_\_\_

Fixture Type: \_\_\_\_\_

Location: \_\_\_\_\_

Contact/Phone: \_\_\_\_\_



## PRODUCT DESCRIPTION

Sleek, ultra-low profile energy efficient LED surface mount downlights in multiple sizes from 5" to 13" • Provides economical installation by mounting directly over standard and fire-rated junction boxes • Optional finish trims and shrouds available for custom, designer look similar to standard recessed downlights • Provides general illumination in residential and commercial applications including multi-family and hospitality • Ideal for use in corridors, living spaces, closets, hallways, pantries, stairways, outdoor covered areas without Emergency Option and much more.

## PRODUCT SPECIFICATIONS

**Construction** Shallow, less than 1", solid ring with white finish

- Non conductive fixture for shower light applications
- Optional, field installable finish trims available for 5" and 7" versions to change the exterior finish of fixture
- Optional, field installable decorative baffle and cone shrouds for 5" and 7" versions provide the aesthetic and source shielding similar to the experience of a fully recessed downlight.

**Optics** Light guide technology combined with diffusing lens conceals the LEDs from direct view and provides uniform lens luminance.

**LED Light Engine** LEDs mounted directly to heatsink designed to provide superior thermal management and ensure long life • 2700K, 3000K, 3500K or 4000K LED color temperature • LEDs binned for 4-step MacAdam ellipse color consistency • 90 CRI minimum.

**LED Driver** Choice of dedicated 120 volt (120) driver or universal voltage (MVOLT) driver that accommodates input voltages from 120-277 volts AC at 50/60Hz • Power factor > 0.9 at 120V input • 120 volt driver is dimmable with the use of most incandescent, magnetic low voltage and electronic low voltage wall box dimmers • Universal voltage driver is dimmable with the use of most 0-10V wall box dimmers • External driver is only available on 5" and 7" models • For a list of compatible dimmers, see [JUNOSLIMFORM-DIM](#).

**Emergency Battery Option** Available on fixture sizes 11" and larger

- Battery factory assembled to fixture with integral test switch (EL option)
- Drives LEDs for 90 minutes to meet Life Safety Code (NFPA-LSC), National Electrical Code (NEC), and UL requirements • Emergency battery not available in California due to Title 20 restrictions • EBX option provides back box without battery for consistent look when used in same space as fixtures with EL emergency option • Damp location only with emergency option.

**Life** Rated for 50,000 hours at >70% lumen maintenance.

**Labels** ENERGY STAR® certified • Certified to the high efficacy requirements of California T24 JA8-2016 • CSA listed for US and Canada

- Suitable for wet locations (covered ceilings) • Damp location only with emergency option.

**Testing** All reports are based on published industry procedures; actual performance may differ as a result of the end-user environment and applications. All values are design or typical values, measured under laboratory conditions at 25 °C.

**Warranty** 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

Specifications subject to change without notice.

## INSTALLATION


**Junction Box Mounting** Fixture provided with leads for direct wire connection in j-box • Installs directly to industry standard junction boxes

- Compatible boxes include 4" metal or plastic octagonal standard and fire-rated junction boxes (3 1/2" junction box screw-hole spacing required for installation) • Minimum 2 1/8" deep junction box required for 5" and 7" fixtures (no depth requirement for 11" and larger fixtures) • Quick mount bracket provides fast installation of fully assembled fixture to junction box
- Suitable for ceiling mount • Suitable for use within closet storage spaces when installed per NEC requirements.


**Junction box sizes vary - Verify compatibility with fixture prior to installation**



## DIMENSIONS

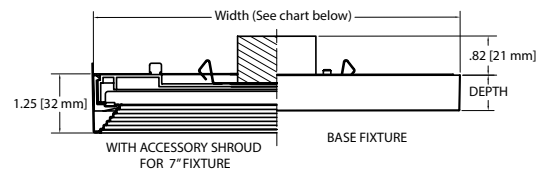

External driver available on 5" and 7" models only.

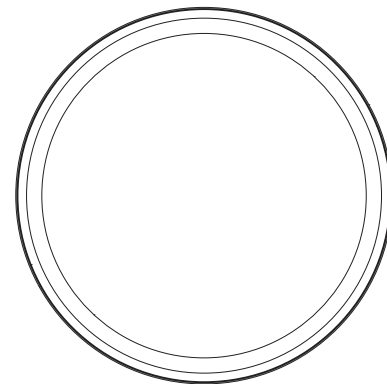


## ROUND SPECIFICATIONS

	Width	Depth
JSF 5IN	5.25 (13.34)	0.75 (1.91)
JSF 7IN	7.77 (19.74)	0.75 (1.91)
JSF 11IN	11.08 (28.14)	0.9 (2.29)
JSF 13IN	13.05 (33.15)	0.9 (2.29)

All dimensions are in inches (centimeters) unless otherwise indicated.

## EMERGENCY BATTERY FOR 11" AND 13"

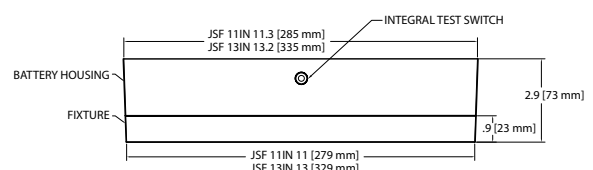

# JUNO SLIMFORM™ LED SURFACE MOUNT DOWNLIGHTS

FOR J-BOX INSTALLATION  
5", 7", 11", 13" ROUND  
**JSF SERIES**

## PERFORMANCE DATA

	JSF 5IN		JSF 7IN		JSF 11IN		JSF 13IN	
	120V	MVOLT	120V	MVOLT	120V	MVOLT	120V	MVOLT
Lumens	700	700	1000	1000	1300	1300	1800	1800
CRI	90CRI		90CRI		90CRI		90CRI	
CCT	27K, 30K, 35K, 40K		27K, 30K, 35K, 40K		27K, 30K, 35K, 40K		27K, 30K, 35K, 40K	
Voltage	120V	120V-277V	120V	120V-277V	120V	120V-277V	120V	120V-277V
Input Power	10W	10W	13W	13W	15W	15W	20W	20W
Input Current	110MA	50MA	150MA	60MA	180MA	80MA	240MA	110MA
Frequency	50/60Hz		50/60Hz		50/60Hz		50/60Hz	
Power Factor	>0.9		>0.9		>0.9		>0.9	

## ORDERING INFORMATION

Example: JSF 5IN 07LM 27K 90CRI 120 FRPC WH

Series	Size/Lumens	Color Temperature	CRI	Voltage/Driver	Finish	Emergency Battery <sup>1,2,3</sup>
JSF SlimForm Surface Mount Downlight - Round	5IN 07LM 5", 700 Lumens	27K 2700K	90CRI 90+ CRI	120 FRPC Dedicated 120V, Forward Reverse Phase Dimmign MVOLT ZT Universal Voltage 120V-277V, 0-10V Dimming	WH White	EL <sup>3</sup> Battery Back-up Option EBX Empty Back Box for Aesthetics
	7IN 10LM 7", 1000 Lumens	30K 3000K				
	11IN 13LM 11", 1300 Lumens	35K 3500K				
	13IN 18LM 13", 1800 Lumens	40K 4000K				


†: EL Battery Back-up option is not Energy Star certified

## ACCESSORIES

**TRIM** – Optional, field installable finish trim rings available to change the exterior finish of fixture.

Example: JSFTRIM 5IN BL

Series	Size	Finish
JSFTRIM SlimForm Accessory- Trim	5IN 5 inches	BL Black
	7IN 7 inches	BZ Bronze
		SN Satin Nickel




**TRIM**

**SHROUD** – Optional, field installable decorative baffle and cone shrouds provides the aesthetic and source shielding similar to the experience of a fully recessed downlight.

Example: JSFSHROUD 5IN DB WWH

Series	Size	Shroud Style	Finish
JSFSHROUD SlimForm Accessory Shroud - Round	7IN 7 inches	DB Downlight Baffle	WWH White trim, white shroud



**BAFFLE SHROUD**

### Notes:

- 1 Emergency battery available with 11IN and 13IN only.
- 2 Emergency battery is only available with MVOLT ZT.
- 3 Emergency battery option not available in California due to Title 20 restrictions.

# JUNO SLIMFORM™ LED SURFACE MOUNT DOWNLIGHTS

FOR J-BOX INSTALLATION  
5", 7", 11", 13" ROUND  
**JSF SERIES**

## PHOTOMETRICS


**Distribution Curve**

**Distribution Data**


**Coefficient of Utilization**

**Illuminance Data at 30" Above Floor for a Single Luminaire**


**JSF 5IN 27K**, 2700K LEDs, input watts: 9.72, delivered lumens: 727, LM/W = 74.8, test no. ISF 33599, tested in accordance to IESNA LM-79.

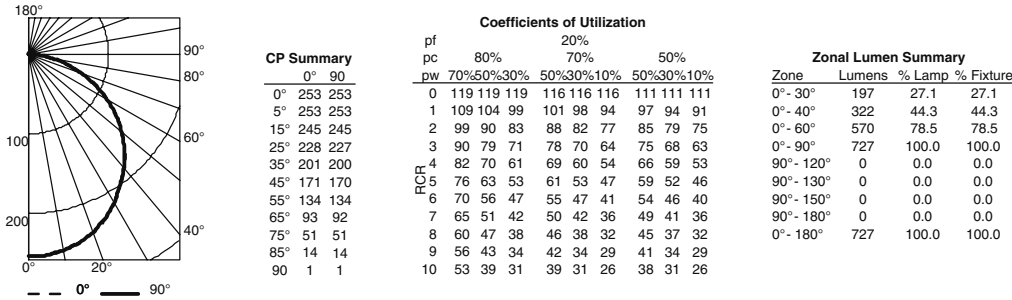


**JSF 7IN 27K**, 2700K LEDs, input watts: 12.8, delivered lumens: 1060, LM/W = 82.8, test no. ISF 33600, tested in accordance to IESNA LM-79.

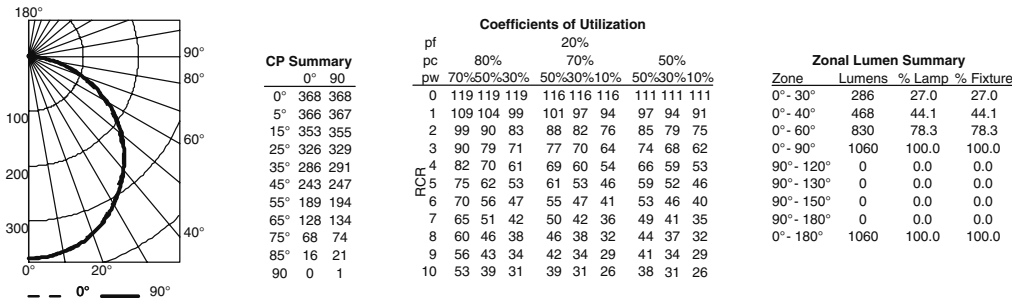

**JSF 11IN 27K**, 2700K LEDs, input watts: 15.2, delivered lumens: 1305, LM/W = 85.9, test no. ISF 33661, tested in accordance to IESNA LM-79.

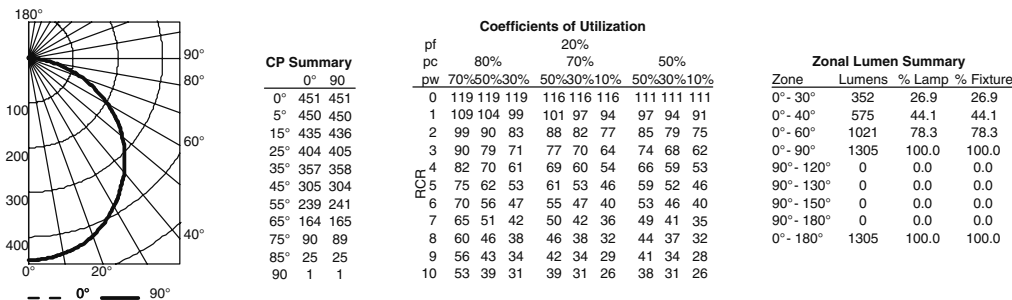

**JSF 13IN 27K**, 2700K LEDs, input watts: 20.2, delivered lumens: 1779, LM/W = 88, test no. ISF 33663, tested in accordance to IESNA LM-79.

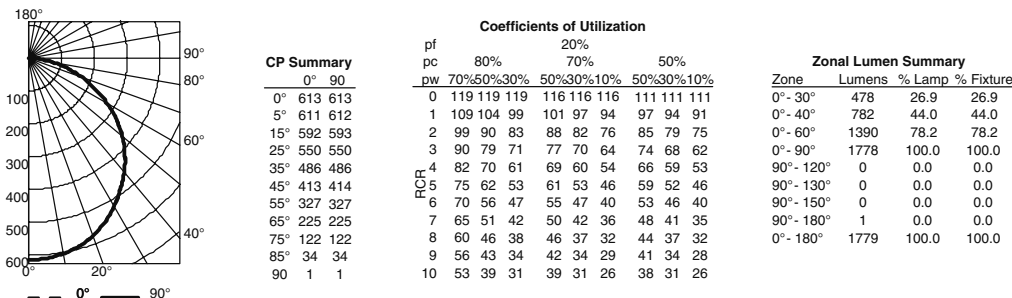

For 30K fixtures, use 1.02 multiplier; For 35K fixtures, use 1.03 multiplier, For 40K fixtures, use 1.07 multiplier.