



# KT-LED25A23-O-E26-8XX-DIM /G2


## 200W REPLACEMENT LAMP

### DESCRIPTION

24W Commercial A23/PS25 Lamp | 3000–5000K | > 80 CRI | Omnidirectional



|                                          |
|------------------------------------------|
| <b>LAMP TYPE:</b> A23/PS25               |
| <b>BASE TYPE:</b> E26 (Medium)           |
| <b>WATTAGE:</b> 24W                      |
| <b>COLOR TEMPERATURE:</b> 3000–5000K     |
| <b>COLOR RENDERING INDEX (CRI):</b> > 80 |
| <b>WARRANTY:</b> 5 Years                 |

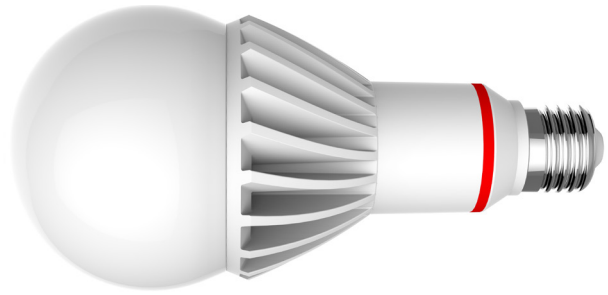

### PRODUCT FEATURES

- Up to 75% energy saving compared to legacy equivalent lamps
- Can be used in base-up, base-down, or base-horizontal position
- Large metal heatsink for optimal heat dissipation
- THD < 20%
- PF > 0.90
- Operating temperature range –4°F/–20°C to 113°F/45°C; 95°F/35°C max for fully enclosed fixture
- Ideal for post top, bollards, and outdoor corridor lighting
- Suitable for dry and damp location
- Rated for open and enclosed fixtures
- Energy Star listed
- Meets UL 1993 standards

### PERFORMANCE SPECIFICATIONS

| Keystone Catalog Number       | Lamp Wattage | CCT   | Lumens | Efficacy | Input Voltage | Legacy Equivalent Wattage | Base Type | Dimmable* | Light Distribution | CRI  |
|-------------------------------|--------------|-------|--------|----------|---------------|---------------------------|-----------|-----------|--------------------|------|
| KT-LED25A23-O-E26-830-DIM /G2 | 24W          | 3000K | 3200   | 133 lm/W | 120-277V      | 200W incand./<br>100W HID | E26       | Yes       | 330°               | > 80 |
| KT-LED25A23-O-E26-840-DIM /G2 | 24W          | 4000K | 3200   | 133 lm/W | 120-277V      | 200W incand./<br>100W HID | E26       | Yes       | 330°               | > 80 |
| KT-LED25A23-O-E26-850-DIM /G2 | 24W          | 5000K | 3200   | 133 lm/W | 120-277V      | 200W incand./<br>100W HID | E26       | Yes       | 330°               | > 80 |

\*Note: Lamp is TRIAC dimmable only at 120v.




# KT-LED25A23-O-E26-8XX-DIM /G2

## 200W REPLACEMENT LAMP

### PHOTOMETRIC SPECIFICATIONS

#### POLAR CANDELA DISTRIBUTION

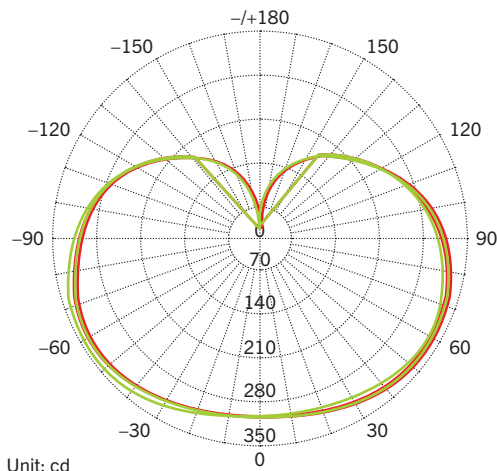


Unit: cd

C0 / 180,276.7

C90 / 270,277.6

#### SPECTRAL DISTRIBUTION

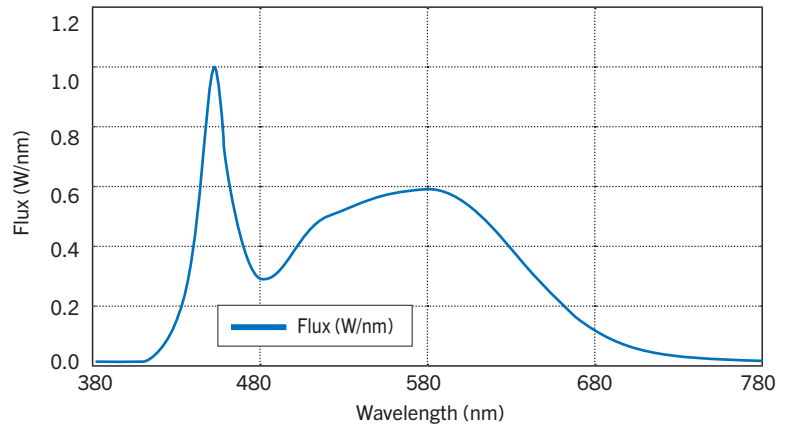


#### RATED LIFE

L70 (Hours)

25,000

### PHYSICAL SPECIFICATIONS

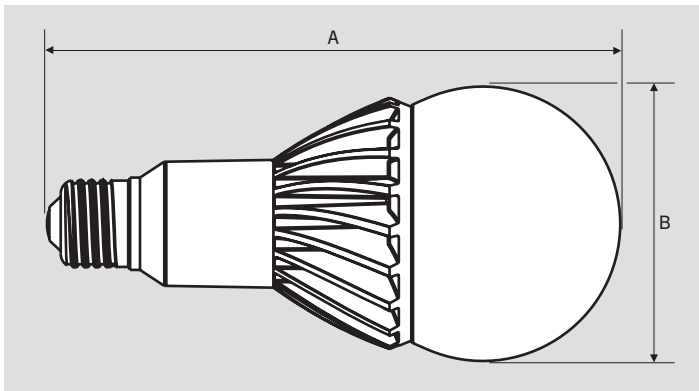

#### LAMP DIMENSIONS

|              |       |
|--------------|-------|
| A (Length)   | 6.73" |
| B (Diameter) | 3.23" |

BASE TYPE: E26 (Medium)

### PACKAGING

|                   |                         |
|-------------------|-------------------------|
| Carton Quantity   | 12 pcs                  |
| Carton Dimensions | 14.17" x 10.63" x 7.36" |
| Carton Weight     | 10 lbs                  |



# KT-LED25A23-O-E26-8XX-DIM /G2

## 200W REPLACEMENT LAMP

### ORDERING INFORMATION

| CATALOG NUMBER                | PACK QTY. | UPC          | EASY CODE |
|-------------------------------|-----------|--------------|-----------|
| KT-LED25A23-O-E26-830-DIM /G2 | 12 pcs    | 843654149509 | ZGF-28    |
| KT-LED25A23-O-E26-840-DIM /G2 | 12 pcs    | 843654149516 | PWO-72    |
| KT-LED25A23-O-E26-850-DIM /G2 | 12 pcs    | 843654149523 | OCS-25    |

### CATALOG NUMBER BREAKDOWN

# KT-LED25A23-O-E26-8XX-DIM /G2

1 2 3 4 5 6 7 8 9 8

- 1 Keystone Technologies
- 2 LED Lamp
- 3 Wattage
- 4 Lamp Style
- 5 Omnidirectional
- 6 Base Type
- 7 80 CRI
- 8 CCT
- 9 Dimming
- 10 Second Generation