

KTEB-132-1-TP-FC

T8 ELECTRONIC BALLAST



DESCRIPTION

1 x F32T8 | 120V | NPF | Rapid Start | Finger Case

STARTING METHOD: Rapid

INPUT VOLTAGE: 120VAC $\pm 10\%$

INPUT FREQUENCY: 50/60 Hz

POWER FACTOR: Normal

WARRANTY: 3 Years


PRODUCT FEATURES

- Sound Rated: A
- Maximum Case Temperature: 167°F, 75°C
- Minimum Start Temperature: 0°F, -18°C
- Meets FCC Part 18 (Class B) Consumer Limits
- UL, cUL 935 Listed


ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD (%)
F32T8 (32W)	1	120	28	0.40	0.57	1.5	0.89	3.18	160
F25T8	1	120	24	0.36	0.55	1.5	0.98	4.08	160
F17T8	1	120	17	0.28	0.52	1.5	1.00	5.88	160
F15T8	1	120	14	0.22	0.52	1.5	0.90	6.43	160
F14T8	1	120	13	0.21	0.51	1.5	0.91	7.00	160
F13T8	1	120	12	0.16	0.59	1.5	0.91	7.58	160
F013T8	1	120	12	0.16	0.59	1.5	0.91	7.58	160
F40T12	1	120	25	0.34	0.59	1.5	0.60	2.40	160
F34T12	1	120	24	0.34	0.58	1.5	0.70	2.91	160
F30T12	1	120	21	0.29	0.60	1.5	0.66	3.14	160
F20T12	1	120	18	0.24	0.62	1.5	0.90	5.00	160
F15T12	1	120	14	0.19	0.61	1.5	0.82	5.85	160

WIRING DIAGRAMS

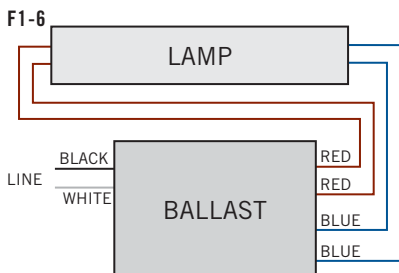

HOT SPOT LOCATION

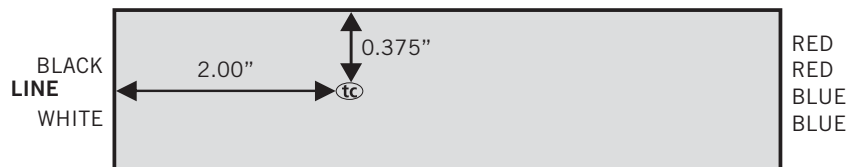


KTEB-132-1-TP-FC

T8 ELECTRONIC BALLAST

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	5.90"
WIDTH	0.91"
HEIGHT	0.76"
MOUNTING (M1, M2)	5.60"
CASE STYLE	V1

STANDARD LEAD LENGTHS*

BLACK	15"
WHITE	15"
BLUE	26"
RED	34"

*Consult Keystone for special lead length requirements.

CASE MATERIAL: Metal

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-132-1-TP-FC-CP	Carton Pack	TBD	Active

CATALOG NUMBER BREAKDOWN

KTEB-132-1-TP-FC-CP

Keystone Technologies Electronic Ballast	1 Lamp	32 Watts	120V Input	Thermally Protected	Finger Case Style	Packaging Style
---	-----------	-------------	---------------	------------------------	-------------------------	--------------------