



KTEB-275-1-TP-PIC-SL

T12 ELECTRONIC FLUORESCENT



PRODUCT FEATURES



STARTING METHOD: Instant	INPUT VOLTAGE: 120VAC $\pm 10\%$	WARRANTY: 3 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Transient Protection Meets ANSI/IEEE C62.41 Cat. A
- Meets FCC Part 18 (Class B) Consumer Limits

ELECTRICAL SPECIFICATIONS

LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F96T12 75W	2	120	133.0	1.12	0.99	<1.70	0.88	0.66	10	F2-4
	1	120	82.0	0.68	0.99	<1.70	1.05	1.28	10	F1-4
F96T12/ES 60W	2	120	117.0	0.98	0.99	<1.70	0.88	0.75	10	F2-4
	1	120	72.0	0.60	0.99	<1.70	1.05	1.46	10	F1-4
F72T12 57W	2	120	107.0	0.92	0.99	<1.70	0.90	0.84	10	F2-4
	1	120	67.0	0.60	0.99	<1.70	1.05	1.57	10	F1-4
F48T12 40W	2	120	76.0	0.68	0.99	<1.70	0.92	1.21	10	F2-4
F48T12/ES 30W	2	120	64.0	0.60	0.99	<1.70	0.92	1.44	10	F2-4

WIRING DIAGRAMS

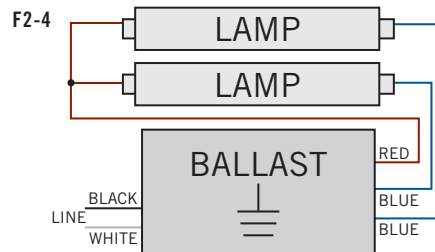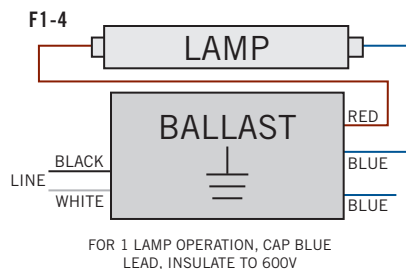




KTEB-275-1-TP-PIC-SL

T12 ELECTRONIC FLUORESCENT

CASE STYLE/DIMENSIONS

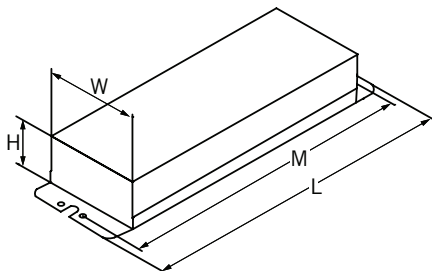

CASE DIMENSIONS


LENGTH: 9.45"
WIDTH: 1.80"
HEIGHT: 1.37"
MOUNTING: 8.90"
UNIT WEIGHT: 1.65 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 58.00" X 58.00"
RED: 66.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

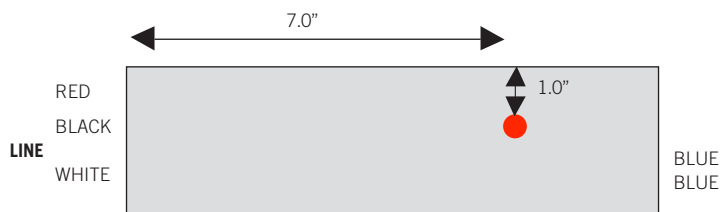

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-275-1-TP-PIC-SL-DP	Distributor	10	Quick Ship
KTEB-275-1-TP-PIC-SL-CP	Carton	10	Active
KTEB-275-1-TP-PIC-SL-BP	Bulk	1,008	Special Order

CATALOG NUMBER BREAKDOWN

KTEB-275-1-TP-PIC-SL

Keystone Technologies
Electronic Ballast

2
Lamps

75
Watts

120V
Input

Thermally
Protected

Active
Power Factor
Correction

Slim Case
Style