



PRODUCT FEATURES



STARTING METHOD: Program	INPUT VOLTAGE: 120-277VAC $\pm 10\%$	WARRANTY: 5 Years
LAMP CONNECTION: Parallel	INPUT FREQUENCY: 50/60 Hz	POWER FACTOR: High

- Sound Rated: A
- Minimum Starting Temperature: 0°F, -18°C
- Maximum Case Temperature: 167°F, 75°C
- Meets FCC Part 18 (Class A) Non-Consumer Limits
- Transient Protection Meets ANSI/IEEE62.41 Cat. A
- Ballast frequency for all listed lamps: > 40kHz

ELECTRICAL SPECIFICATIONS


LAMP TYPE	NO. OF LAMPS	INPUT VOLTS	INPUT WATTS	INPUT CURRENT (AMPS)	POWER FACTOR	CREST FACTOR	BALLAST FACTOR	BALLAST EFFICACY FACTOR	MAX THD%	WIRING DIAGRAM
F32T8 32W	3	120	114.0	0.96	0.99	<1.70	1.18	1.04	10	F3-9
		277	114.0	0.41	0.98	<1.70	1.18	1.04	10	F3-9
	2	120	88.0	0.73	0.99	<1.70	1.35	1.53	10	F2-16
		277	88.0	0.32	0.98	<1.70	1.35	1.53	10	F2-16
F32T8 30W	3	120	104.0	0.88	0.99	<1.70	1.18	1.13	10	F3-9
		277	104.0	0.38	0.98	<1.70	1.18	1.13	10	F3-9
	2	120	80.0	0.67	0.99	<1.70	1.33	1.66	10	F2-16
		277	80.0	0.30	0.97	<1.70	1.33	1.66	12	F2-16
F32T8 28W	3	120	99.0	0.83	0.99	<1.70	1.18	1.19	10	F3-9
		277	99.0	0.36	0.98	<1.70	1.18	1.19	10	F3-9
	2	120	76.0	0.64	0.99	<1.70	1.34	1.76	10	F2-16
		277	76.0	0.28	0.97	<1.70	1.34	1.76	12	F2-16
F32T8 25W	3	120	89.0	0.75	0.99	<1.70	1.19	1.34	10	F3-9
		277	89.0	0.33	0.98	<1.70	1.19	1.34	10	F3-9
	2	120	69.0	0.58	0.99	<1.70	1.37	1.99	10	F2-16
		277	69.0	0.26	0.97	<1.70	1.37	1.99	12	F2-16
F25T8 25W	3	120	87.0	0.73	0.99	<1.70	1.15	1.32	10	F3-9
		277	87.0	0.32	0.98	<1.70	1.15	1.32	10	F3-9
	2	120	68.0	0.57	0.99	<1.70	1.33	2.00	10	F2-16
		277	68.0	0.25	0.97	<1.70	1.33	2.00	12	F2-16
F17T8 17W	3	120	62.0	0.52	0.99	<1.70	1.18	1.90	10	F3-9
		277	62.0	0.23	0.96	<1.70	1.18	1.90	12	F3-9
	2	120	49.0	0.40	0.99	<1.70	1.30	2.65	10	F2-16
		277	49.0	0.19	0.95	<1.70	1.30	2.65	15	F2-16
F40T8 40W	2	120	104.0	0.88	0.99	<1.70	1.18	1.13	10	F2-16
		277	104.0	0.38	0.98	<1.70	1.18	1.13	10	F2-16

WIRING DIAGRAMS

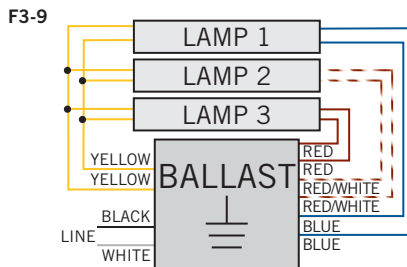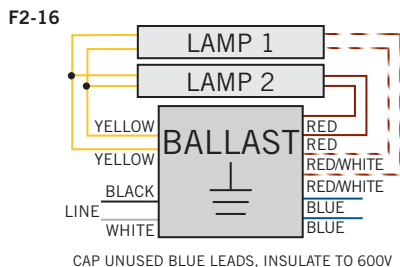

Program Start T8 ballasts require the use of NON-shunted lampholders/sockets.

CASE STYLE/DIMENSIONS

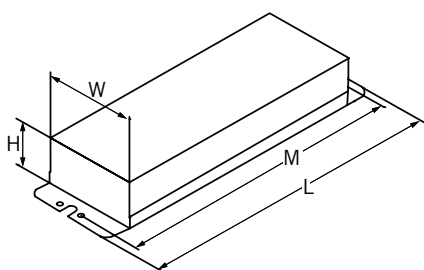

CASE DIMENSIONS


LENGTH: 9.50"
WIDTH: 1.70"
HEIGHT: 1.15"
MOUNTING: 8.90"
UNIT WEIGHT: 1.6 lbs

STANDARD LEAD LENGTHS*

BLACK: 25.00"
WHITE: 25.00"
BLUE: 32.00" x 32.00"
RED: 32.00" x 32.00"
YELLOW: 48.00" X 48.00"
RED/WHITE: 32.00" X 32.00"

*Consult Keystone for special lead length requirements.

HOT SPOT LOCATION

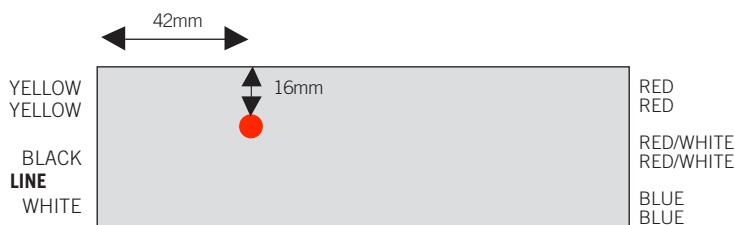

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTEB-332-UV-PS-H-P-CP	Carton	30	Active

CATALOG NUMBER BREAKDOWN

KTEB-332-UV-PS-H-P

Keystone Technologies
Electronic Ballast
 3
Lamps
 32
Watts
 Universal
Voltage Input
(120-277V)
 Program
Start
 High
Ballast
Factor
 NEMA
Premium