

KTLD-36-1-1000-L9

CONSTANT CURRENT LED DRIVER

DESCRIPTION

LED Driver | 36W | 120V Input | 1000mA Constant Current Output

DRIVER TYPE: Constant Current LED Driver
MAX. OUTPUT POWER: 36 W
INPUT VOLTAGE: 120Vac \pm 10%
OUTPUT VOLTAGE: 18~36 Vdc
OUTPUT CURRENT: 1000 mA
DIMMING: Fixed Output
WARRANTY: 5 Years

PRODUCT FEATURES

- Meets FCC Part 15 (Class B) Consumer Limits
- Short Circuit Overload and Open Load Protection
- Type 1 Outdoor, Suitable for Dry and Damp Locations
- UL Pending
- Class 2 Output
- 90°C/194°F Maximum Case Temperature
- Input Frequency: 50/60 Hz


SPECIFICATIONS

ELECTRICAL SPECIFICATIONS

Family	INPUT CHARACTERISTICS				OUTPUT CHARACTERISTICS			FEATURES
	Input Voltage	Input Power	Power Factor	Max. Current	Max. Output Power	Rated Output Current	Output Voltage	Efficiency
36W	120Vac	43W	>0.9	0.41A	36W	1000mA	18~36Vdc	84%

MECHANICAL SPECIFICATIONS

CASE DIMENSIONS



LENGTH	9.57"
WIDTH	1.13"
HEIGHT	1.07"
MOUNTING	8.90"
CASE STYLE	L9

STANDARD LEAD LENGTHS*

WHITE	12.00"
BLACK	12.00"
RED	12.00"
BLUE	12.00"

*Consult Keystone for special lead length requirements.

Input wires are UL 1316
#18 AWG.

Output wires are UL 1316
#22 AWG.

CASE MATERIAL: Metal




KTLD-36-1-1000-L9

CONSTANT CURRENT LED DRIVER

WIRING DIAGRAM



HOT SPOT LOCATION

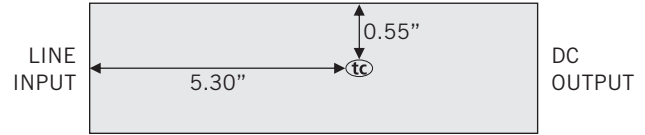

Actual tc point is noted on each LED driver label.

ORDERING INFORMATION

ORDER CODE	PACKAGING STYLE	PACK QTY.	ITEM STATUS
KTLD-36-1-1000-L9-CP	Carton Pack	TBD	Active

CATALOG NUMBER BREAKDOWN

KTLD-36-1-1000-L9-CP

