

Single End Flex Lamp

Commercial GradeLED T8 Lamp



Features & Benefits

- Type A mode: Works on existing compatible Instant Start, Programmed Start, Dimming electronic ballast
- Type B mode: Internal Driver (Direct 120-277VAC input)
- Utilizes existing instant start or rapid start G13 sockets
- Glass tube for superior optical performance
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Works in cold temperature applications
- Compatible with controls and sensors
- Glass tube for superior optical performance
- Continuous Dimming to 10%
- 5 Year Warranty

Product Certification




* EMERGENCY BALLAST RESTRICTIONS

Specification

Order Code	Length	Input Voltage	Power Direct AC	Power w/ Ballast	CCT	Lumen	CRI	Beam Angle	Lamp Efficacy Direct AC	System Efficacy w/ Ballast	Life
L36T8/830/11G-AB	36	120-277V	11	14	3000K	1650	83	325	150	118	50000
L36T8/835/11G-AB	36	120-277V	11	14	3500K	1675	83	325	152	120	50000
L36T8/840/11G-AB	36	120-277V	11	14	4000K	1700	83	325	154	121	50000
L36T8/850/11G-AB	36	120-277V	11	14	5000K	1700	83	325	154	121	50000

Wiring Diagram

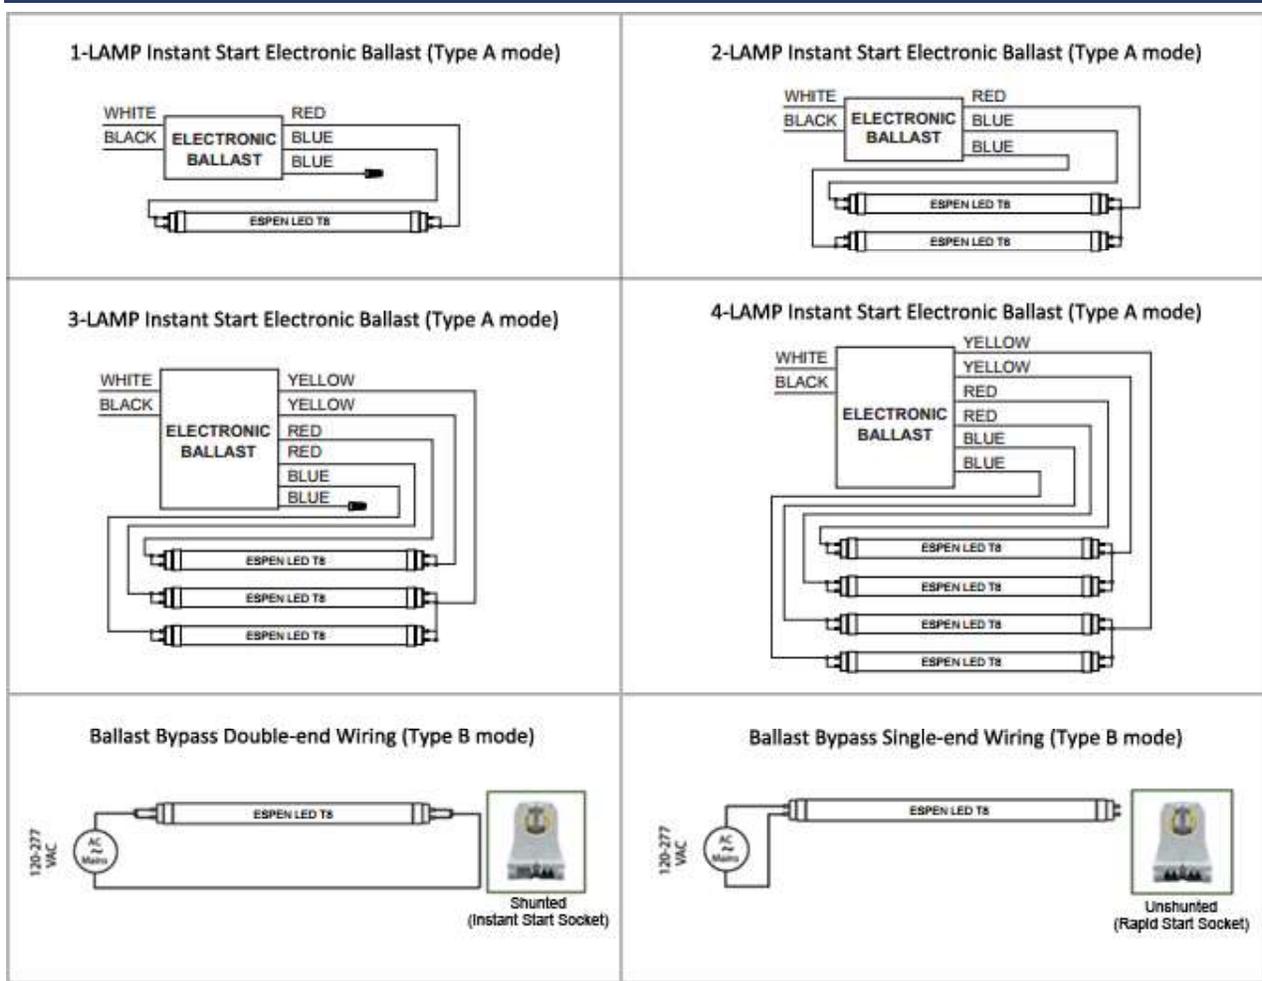

Dlc Information

Order Code	DLC Product ID	DLC Product Model	DLC Version
L36T8/830/11G-AB	PPU3DGUD	L36T8/830/11G-AB (-aa)	5.1
L36T8/835/11G-AB	PNYDW3I8	L36T8/835/11G-AB (-aa)	5.1
L36T8/840/11G-AB	POFZG3UZ	L36T8/840/11G-AB (-aa)	5.1
L36T8/850/11G-AB	PVFXKAV	L36T8/850/11G-AB (-aa)	5.1