

Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long Life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes non-shunted(rapid start) sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- 5 Year Warranty
- Made of Glass



Commercial Grade **LED T8 Lamp**



Flex™
Internal Driver **LED Lamp**

Specification Data


Order Code	Model No.	Length	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Life	Operating Temp.	DLC
930-450	L48T8/835/14G-ID	48	14	120-277	3500	1800	83	325	120	50000	-20 ~ 40	Yes
907-037	L48T8/840/14G-ID	48	14	120-277	4000	1800	83	325	120	50000	-20 ~ 40	Yes
908-641	L48T8/850/14G-ID	48	14	120-277	5000	1800	83	325	120	50000	-20 ~ 40	Yes
930-450	L48T8/830/14G-ID	48	14	120-277	3000	1800	83	325	120	50000	-20 ~ 40	Yes

Ordering Information


EXAMPLE: **L48T8/840/14G-ID**

L	48	T8	8	40	14 G	-	ID
Manufacturer's Code	Normal Length 48=48"	Lamp Shape T8=T8	CRI 8=>80	CCT 50=5000K 40=4000K 35=3500K	Wattage 14G=14W		Internal Driver

Wiring diagram

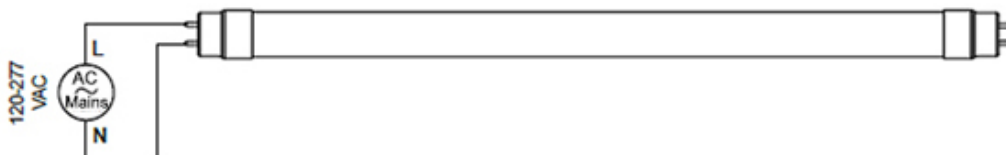

Note: Will not operate on shunted sockets. Use only with non-shunted (rapid start) sockets.



Non-Shunted
(rapid Start Socket)

Shunted
(Instant Start
Socket)