

Double End Type B Lamps

Commercial Grade LED Lamp



Flex™
Internal Driver LED Lamp

Features & Benefits

- Internal Driver
- Smooth, Consistent Light
- UL for Safety
- No UV, No Mercury
- Long life
- High CRI
- Instant on, no delay or warm up time
- Convenient and quick installation
- Utilizes shunted or unshunted G13 sockets
- Compatible with controls and sensors
- Works in cold temperature applications
- Suitable for damp and dry locations
- -20 F to 130 F ambient operating temperature
- Glass tube for superior optical performance
- Continuous Dimming to 10%
- 5 Year Warranty


Product Certification



Specification Data

Model No.	Length	Base Type	Lamp Wattage	Input Voltage	CCT	Initial Lumens	CRI	Beam Angle	LPW	Power Factor	THD	Life (h)
L48T8/8F/12G-ID DE	48	G13	12	120-277	2700K (selectable)	1600	82	200	133	0.9	<20%	50000
L48T8/8F/12G-ID DE	48	G13	12	120-277	3000K (selectable)	1600	82	200	133	0.9	<20%	50000
L48T8/8F/12G-ID DE	48	G13	12	120-277	3500K (selectable)	1650	82	200	138	0.9	<20%	50000
L48T8/8F/12G-ID DE	48	G13	12	120-277	4000K (selectable)	1800	82	200	150	0.9	<20%	50000
L48T8/8F/12G-ID DE	48	G13	12	120-277	5000K (selectable)	1800	82	200	150	0.9	<20%	50000

Wiring Diagram

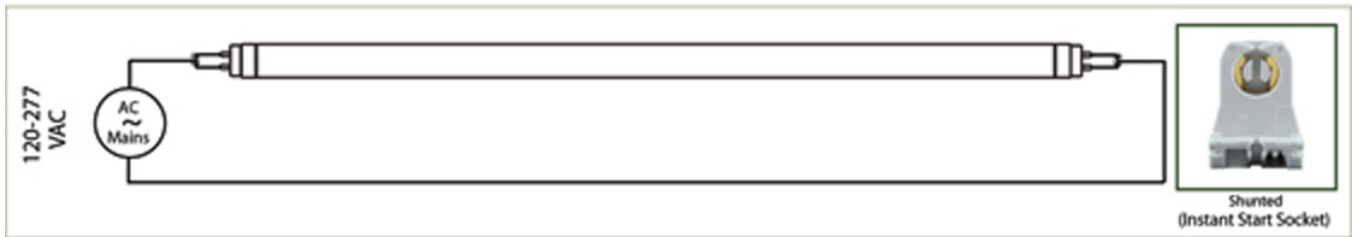

Dlc Information

Model No.	DLC Product ID	DLC Product Model	DLC Version
L48T8/8F/12G-ID DE			
L48T8/8F/12G-ID DE			
L48T8/8F/12G-ID DE			
L48T8/8F/12G-ID DE			
L48T8/8F/12G-ID DE			