

GENERAL INFORMATION

LED Driver Type	Constant Current (Class 2)
Maximum Wattage	4 Watts
Input Voltage	120 - 277 VAC ± 10% Universal
Input Frequency	50/60Hz

CASE STYLE: POLYCARBONATE



ELECTRICAL SPECIFICATIONS

Watts	Rated Current	Output Voltage	Dimming Type	Input Voltage	Input Current	Power Factor	Efficiency	Hatch Part Number
4W	350mA	8-13V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	73%	LCA004-UNV
	700mA	2.8-6.5V	Non-Dimming	120 - 277 VAC	0.12/0.06A	>0.40	73%	LCB004-UNV

PRODUCT FEATURES

- Short circuit and overload protection
- Over temperature protection
- Suitable for dry and damp locations
- Withstanding voltage: I/P – O/P 2kVAC
- Operating temperature range: -20°C to 85°C (measured at Tcase)

APPROVALS


- UL 1310 compliant
- EN61000-3-2



TYPE
TL



MECHANICAL SPECIFICATIONS

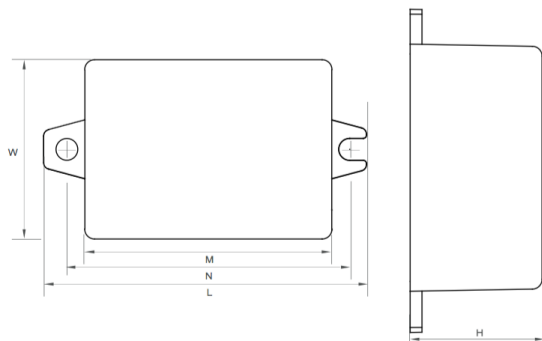

L = 1.93in (49mm) M = 1.48in (37.5mm) N = 1.69in (42.9mm)

W = 1.07in (27.2mm) H = 0.79in (20mm)

WIRING INFORMATION

Input: 12", Black (L), White (N) #18AWG
Output: 12", Red (+), Black (-) #18AWG

PACKAGING INFORMATION

Weight: 4.1oz
Quantity: 200pc/carton

WARRANTY

- 5 year limited warranty