

natural^{led}

Turning Light into Savings ▶▶▶



HO (R17d) Base

Single Base



50,000
Rated
Life Hours

BEAM
ANGLE
325°



Instant On



Single-Pin
Base



Medium
Bi-Pin Base



Non-Dimmable



Long
Life Hours



FL Ballast
Required

TUBE IF

Instant Fit T5/T8

10W, 11W, 15W, 17W, 38W, 42W

With naturalLED® Instant-Fit T5 and T8; it's the easiest way to upgrade your fluorescent fixture to an LED system.

Our Instant-Fit T5/T8 fits into an existing fluorescent system. Utilizes the existing electrical T5/T8 fluorescent ballast without re-wiring.

naturalLED Instant-Fit tubes come in variety of lamp lengths and lighting levels, it is the simplest LED upgrade for your fluorescent systems.

Key Features & Benefits

- ▶ Glass with frosted lens
- ▶ Compatible with Instant Start FL Electronic Ballast
- ▶ Excellent color consistency
- ▶ No Flickering
- ▶ Noise Free design
- ▶ UL/cUL Listed
- ▶ 50,000 hrs rated average life
- ▶ FL T5/T8 ballast required

Applications

- ▶ Conference Room
- ▶ Meeting Room
- ▶ Factory/ Office
- ▶ School & University
- ▶ Hospital
- ▶ Hotel

Color Choices




White

Qualifications









Item Code	Description	Color Temp	Wattage	Lumen Output	Equivalent Wattage	Length	Base	Beam Angle	Rated Hours	
5902	LED28T5/FR32/840/IF	4000K	28W	3,200	54	4-ft/ 48"	G5	325°	50,000	•
5903	LED28T5/FR32/850/IF	5000K	28W	3,200	54	4-ft/ 48"	G5	325°	50,000	•
5850	LED10T8/24FR11/835/IF	3500K	10W	1,150	17	2-ft/ 24"	Bi-Pin	325°	50,000	•
5851	LED10T8/24FR11/840/IF	4000K	10W	1,150	17	2-ft/ 24"	Bi-Pin	325°	50,000	•
5852	LED10T8/24FR11/850/IF	5000K	10W	1,150	17	2-ft/ 24"	Bi-Pin	325°	50,000	•
5891	LED11T8/36FR14/840/IF	4000K	11W	1,400	25	3-ft/ 36"	Bi-Pin	325°	50,000	
5892	LED11T8/36FR14/850/IF	5000K	11W	1,400	25	3-ft/ 36"	Bi-Pin	325°	50,000	
5914	LED15.5T8/FR18/840/IF	4000K	15.5W	1,800	32	4-ft/ 48"	Bi-Pin	325°	50,000	•
5915	LED15.5T8/FR18/850/IF	5000K	15.5W	1,800	32	4-ft/ 48"	Bi-Pin	325°	50,000	•
5916	LED18T8/FR22/840/IF	4000K	18W	2,200	32	4-ft/ 48"	Bi-Pin	325°	50,000	•
5917	LED18T8/FR22/850/IF	5000K	18W	2,200	32	4-ft/ 48"	Bi-Pin	325°	50,000	•
5887	LED38T8/96FR44/840/IF	4000K	38W	4,400	59	8-ft/ 96"	Single	325°	50,000	
5888	LED38T8/96FR44/850/IF	5000K	38W	4,400	59	8-ft/ 96"	Single	325°	50,000	
5897	LED42T8/96FR50/R17d/840/IF	4000K	42W	5,000	59	8-ft/ 96"	R17d	325°	50,000	
5898	LED42T8/96FR50/R17d/850/IF	5000K	42W	5,000	59	8-ft/ 96"	R17d	325°	50,000	

► Dimensions

	Item	A	B		Weight (lbs)
	2-ft	1.00-in	24.00-in		0.25
	3-ft	1.00-in	36.00-in		0.35
	4-ft	1.00-in	48.00-in		0.50
	8-ft	1.00-in	96.00-in		1.00

► Illuminance Distribution

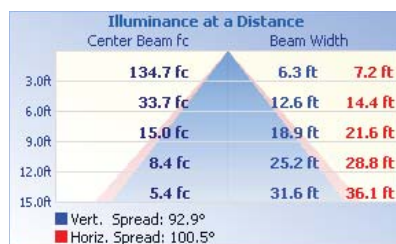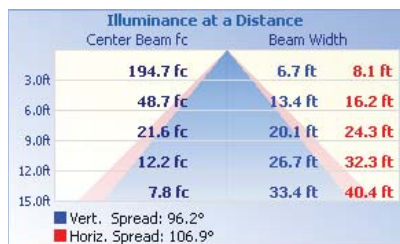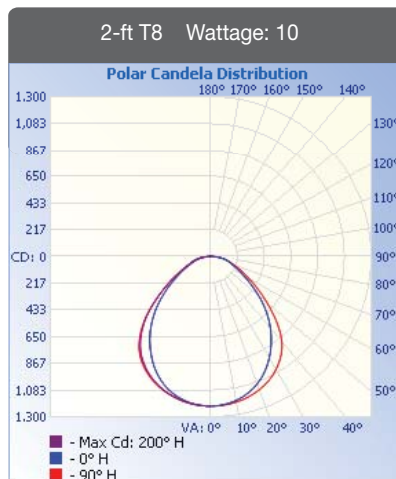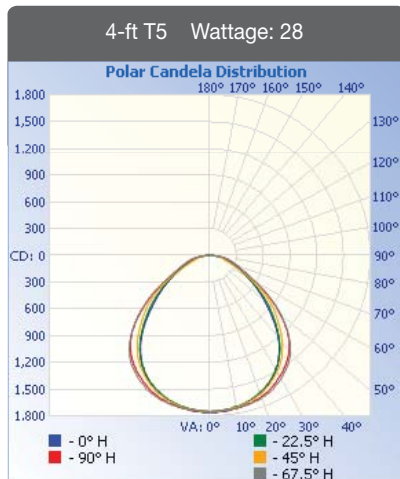

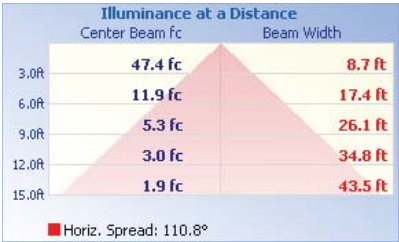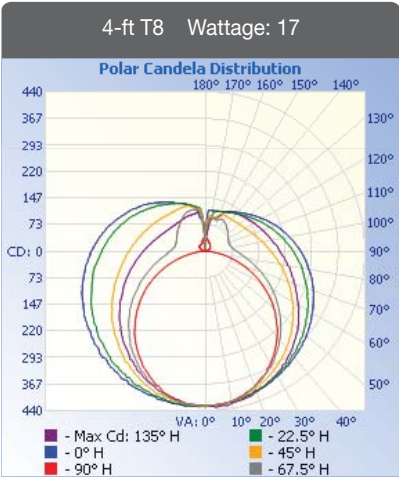

► Master Carton Package

2-ft
3-ft
4-ft

Package
(Master)

25

8-ft

Package
(Master)

10