

Refit Solutions from GE



Application illustration only, subject lamps not used in photo.

Integrated LED Tubes - 2, 3 and 4 foot - Improved Lumens

Convert your existing linear fluorescent fixture to LED lighting without needing a comprehensive reinstall. LED tubes are ideal for those seeking high energy savings with minimal installation time. Each LED tube is operated by an internal GE Lightech™ driver. GE integrated LED tubes run on electronic T8 instant-start or programmed start ballasts.

FEATURES

- 2', 3' & 4' tubes
- 1200-3,450 lumens
- >120 total system lumens per watt (LPW)
- Available in 3000K, 3500K, 4000K, and 5000K color temperatures
- 50,000-hour rated life
- Dimmable*
- UL and cUL listed
 - in compliance with UL 1598 certification
- Open or Enclosed Fixtures
- 5 year limited warranty
- 2' and 4' DLC listed
- NSF rated

BENEFITS

- Fast and easy LED upgrade
- Low energy LFL replacement
- 66% longer life than LFL (50,000 vs. 30,000 hours)
- Better quality of light
 - no UV
 - instant on
- Shatter resistant
 - prevents breakage and downtime
- Easy disposal, non-hazardous waste

*Check ballast compatibility at:
www.gelighting.com/LEDTUBES-ballast-compatibility

To learn more about saving money and energy,
go to: gelighting.com/ThinkLED

ecomagination™

When you Think LED lighting, Think GE.

Information provided is subject to change without notice. Please verify all details with GE. All values are design or typical values when measured under laboratory conditions, and GE makes no warranty or guarantee, expressed or implied, that such performance will be obtained under end-use conditions.

current
powered by GE



Product Specifications

Integrated Refit LED Tubes

GE DLC Listed Code	Description	Bulb Shape	Base	Low BF Watts	Normal BF Watts	High BF Watts	Case Qty	Length (In)	Low BF Initial Lumens	Normal BF Initial Lumens	High BF Initial Lumens	Color Temp (*K)	CRI	Rated Life (L70)	DLC Listed
2ft LED Tube															
31557	LED9ET8/2/830	T8	Med Bi-Pin(G13)	8	9	13	25	24"	1200	1350	1800	3000	80	50,000	-
26635	LED9ET8/2/835	T8	Med Bi-Pin(G13)	8	9	13	25	24"	1200	1350	1800	3500	80	50,000	Yes
26648	LED9ET8/2/840	T8	Med Bi-Pin (G13)	8	9	13	25	24"	1250	1400	1900	4000	80	50,000	Yes
26676	LED9ET8/2/850	T8	Med Bi-Pin(G13)	8	9	13	25	24"	1250	1400	1900	5000	80	50,000	Yes
3ft LED Tube															
31554	LED12ET8/3/830	T8	Med Bi-Pin(G13)	10	12	16	25	36"	1350	1500	2050	3000	80	50,000	-
26544	LED12ET8/3/835	T8	Med Bi-Pin(G13)	10	12	16	25	36"	1400	1550	2100	3500	80	50,000	-
26625	LED12ET8/3/840	T8	Med Bi-Pin (G13)	10	12	16	25	36"	1400	1550	2100	4000	80	50,000	-
26627	LED12ET8/3/850	T8	Med Bi-Pin(G13)	10	12	16	25	36"	1450	1650	2200	5000	80	50,000	-
4ft LED Tube															
61218	LED12ET8/4/830	T8	Med Bi-Pin(G13)	10	12	17	25	48"	1600	1750	2350	3000	80	50,000	Yes
61223	LED12ET8/4/835	T8	Med Bi-Pin(G13)	10	12	17	25	48"	1650	1800	2450	3500	80	50,000	Yes
61271	LED12ET8/4/840	T8	Med Bi-Pin(G13)	10	12	17	25	48"	1650	1800	2450	4000	80	50,000	Yes
61327	LED12ET8/4/850	T8	Med Bi-Pin(G13)	10	12	17	25	48"	1700	1900	2550	5000	80	50,000	Yes
61329	LED12ET8/4/865	T8	Med Bi-Pin(G13)	10	12	17	25	48"	1700	1900	2550	6500	80	50,000	-
62399	LED15ET8/4/830	T8	Med Bi-Pin(G13)	13	15	21	25	48"	1900	2150	2800	3000	80	50,000	Yes
62401	LED15ET8/4/835	T8	Med Bi-Pin(G13)	13	15	21	25	48"	2000	2250	2900	3500	80	50,000	Yes
62402	LED15ET8/4/840	T8	Med Bi-Pin(G13)	13	15	21	25	48"	2000	2250	2900	4000	80	50,000	Yes
62409	LED15ET8/4/850	T8	Med Bi-Pin(G13)	13	15	21	25	48"	2050	2350	3000	5000	80	50,000	Yes
62410	LED15ET8/4/865	T8	Med Bi-Pin(G13)	13	15	21	25	48"	2050	2350	3000	6500	80	50,000	-
31550	LED18ET8/4/830	T8	Med Bi-Pin(G13)	15	18	24	25	48"	2150	2450	3250	3000	80	50,000	Yes
93133	LED18ET8/4/835	T8	Med Bi-Pin (G13)	15	18	24	25	48"	2250	2550	3350	3500	80	50,000	Yes
93135	LED18ET8/4/840	T8	Med Bi-Pin(G13)	15	18	24	25	48"	2250	2550	3350	4000	80	50,000	Yes
93140	LED18ET8/4/850	T8	Med Bi-Pin(G13)	15	18	24	25	48"	2300	2650	3450	5000	80	50,000	Yes

System Watts - Refit LED Tubes

Ballast Factor	LED18ET8/4/xxx Rated Lumens	LED Approx. System Watts per tube	F32T8 Approx. System Watts per lamp
L (232MAX-G-L)	2300	17	25
N (232MAX-G-N)	2550	20.5	28
H (232MAX-G-N)	3350	28	37

Lumen and wattage numbers above are approximations that can be used for estimates only.
LED System Watts - Add approximately 15% to LED Tube wattage for driver losses.


Savings Breakdown

Save 66% compared to standard T8 (4-lamp) light fixtures over a five-year period.

Provides 4400 lumens at 36W vs. 6600 lumens at 148W in a 4 lamp T12 system.

Check ballast compatibility at www.gelighting.com/LEDTUBES-ballast-compatibility

Cumulative Energy Costs - Cumulative Costs

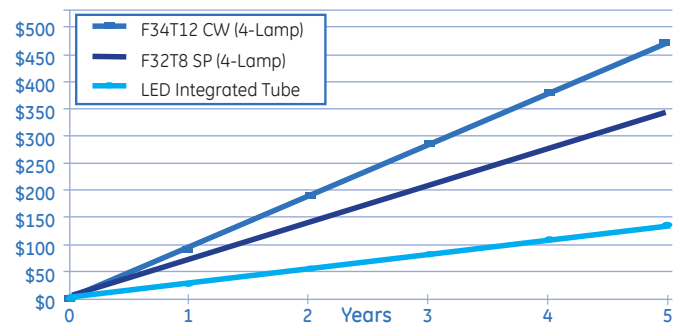

Savings calculations are based on energy costs using \$0.11 per kWh and 16 hours of daily operation.

ecomagination™



Product is compliant with material restriction requirements of RoHS

current
powered by GE

www.gelighting.com

GE and the GE Monogram are trademarks of the General Electric Company. All other trademarks are the property of their respective owners. Information provided is subject to change without notice. All values are design or typical values when measured under laboratory conditions. GE Lighting and GE Lighting Solutions, LLC are businesses of the General Electric Company. © 2016 GE.

LEDL029 (Rev 04/05/17)

