



STARLED[®], INC.

PANEL MOUNT INDICATOR LIGHT FOR 15/32" (0.468) MOUNTING HOLE

ORDERING INFORMATION: $\frac{\text{LHMF}}{\text{(A)}} - \frac{\text{R}}{\text{(B)}} - \frac{1}{\text{(C)}}$

(A) MODEL NUMBER

LHMF - COMPLETE ASSEMBLY (BODY AND LENS)
LHMFB - BODY ASSEMBLY ONLY
LHMFL - LENS ASSEMBLY ONLY


(B) LENS COLOR

R - RED
A - AMBER
Y - YELLOW
G - GREEN
W - WHITE
C - WATER CLEAR


(C) LENS STYLE

1 - FLAT LENS
2 - DOME LENS

LHMF WITH DOME LENS

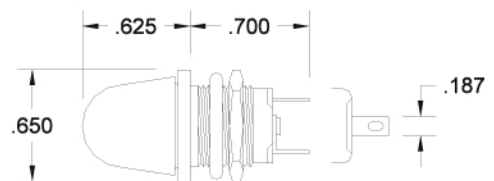


LHMF WITH FLAT LENS

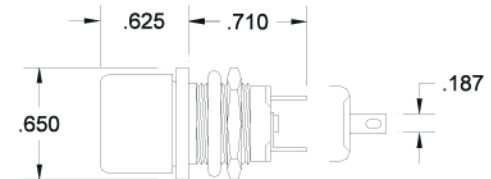

LHMFL

LHMFB



NOTES:

1. MEETS ALL THE APPLICABLE REQUIREMENTS OF MIL-L-3661.
2. MATERIALS: BODY AND MOUNTING HARDWARE - BLACK ANODIZED ALUMINUM, LENS- HIGH IMPACT PLASTIC, TERMINALS - TIN PLATED BRASS.
3. USES T1-3/4 MIDGET FLANGE BASE LAMPS (INCANDESCENT OR LED). SEE SPECIFICATIONS FOR MODEL MF63.
4. ALL LENSES ARE TRANSPARENT EXCEPT FOR WHITE.
5. MINIMUM CENTER TO CENTER DISTANCE: 11/16"
6. MAXIMUM PANEL THICKNESS: 11/64"