

Date: _____ Location: _____

Product: _____ Project: _____

Quantity: _____ Catalog #: _____

LED Cooler Light Family Series

CONSTRUCTION:

Aluminum and PC body. Frosted lens.

OPTICAL SYSTEM:

° beam angle.

WARRANTY:

5-year limited warranty. Actual performance may differ as a result of end-user environment and application.

ELECTRICAL:

Available as 120-277V.

-28°C to °50C, -20°F to 122°F

INSTALLATION & MOUNTING:

Surface mounting clips with Y-type connecting cord.

CONTROLS & DIMMING:

Non-dimming.

FEATURES

- IP44 rated
- Easy installation and maintenance
- Non-corrosive environments
- Easy to link
- 50,000 hours lifetime

SUITABLE APPLICATIONS

- Food Plants
- Dairy Plants
- Pharmaceutical Plants
- Supermarkets
- Hospitals
- Various Freezers
- Cold Storage




MOUNTING OPTION:



Y-Type connecting cord

OPTIONAL ACCESSORIES:



3-foot Power Input Cord
LOC-CT-3FTINPUT-WP

LENGTH	Vertical Hole Distance	Traverse Hole Distance	Linkable Quantity
4-foot	43.5" (1105mm)	2.25" (57mm)	18 pieces
5-foot	55.31" (1405mm)	2.25" (57mm)	15 pieces
6-foot	65.75" (1670mm)	2.25" (57mm)	12 pieces



LOC-4FTCT-18W50K

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
18W	5000K	2,610LM	145lm/W	120-277V	80	0.974	8%	


LOC-5FTCT-23W50K

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
23W	5000K	3,335LM	145lm/W	120-277V	80	0.9	20%	

LOC-6FTCT-27W50K

WATTAGE	CCT	LUMENS	EFFICACY	VOLTAGE	CRI	POWER FACTOR	THD	REPLACES
27W	5000K	3,915LM	145lm/W	120-277V	80	0.9	20%	

MEASUREMENTS

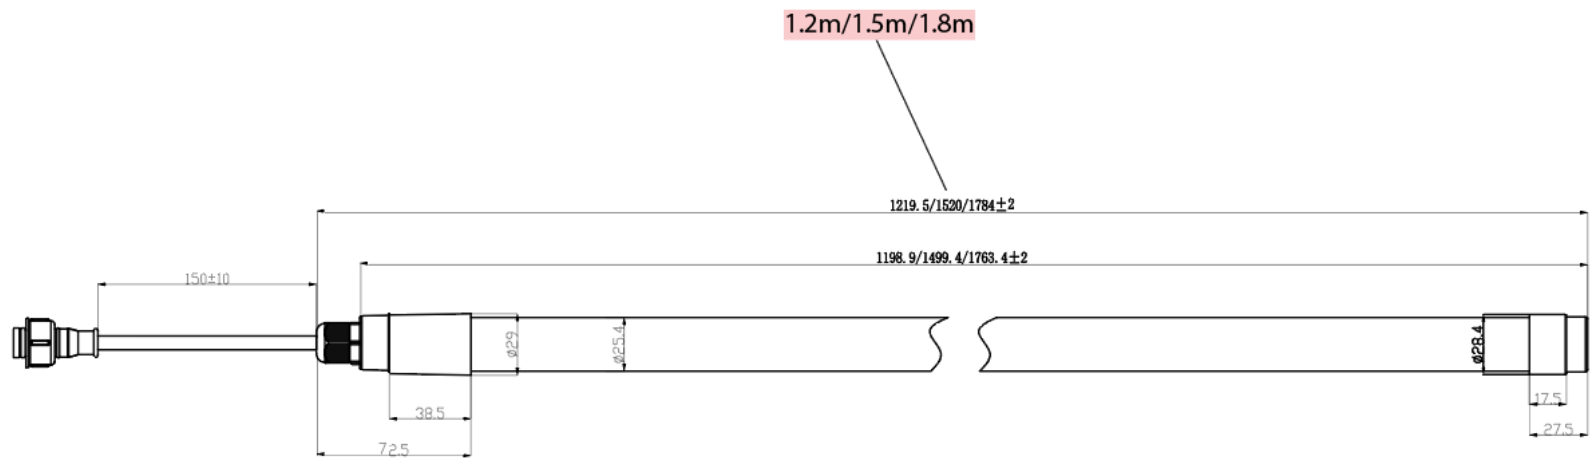

MODEL	QTY	NET WEIGHT	MASTER CARTON SIZE	GROSS WEIGHT	PCS CTN	UPC CODE
LOC-4FTCT-18W50K	1	1.18lbs	50.79" x 7.28" x 7.09"	18.74lbs	12	00810050947213
LOC-5FTCT-23W50K	1	1.32lbs	62.6" x 7.28" x 7.09"	20.66lbs	12	00810050947206
LOC-6FTCT-27W50K	1	1.46lbs	73.23" x 7.28" x 7.09"	24.52lbs	12	00810050947244