



CUSTOMER NAME _____

Project Name _____

Date _____ Type _____

Catalog Number _____

LTQ Series

Track Light

LTQ provides high-performance solutions for demanding market needs. The optical design of the LTQ provides the best wall-wash effect for merchandise and banners. The full enclosure of this fixture is comprised of high precision die-casts providing a robust finish and quality. LTQ's innovative joint design enables continuous adjustments to aim at the right spot with the right intensity.

Construction

Housing: Die cast aluminum housing

Fixture Color: White or Black

Weight: 3.6 lbs (1.64 kg)

Optical System

Lumens: 2200 - 3900

Distribution: Wall Wash

CCT: 2700K, 3000K, 3500K, 4000K

CRI: 90

Electrical

Input Voltage: 120 VAC

Input Frequency: 50/60Hz

Power Factor (PF)*: >0.9%*

Total Harmonic Distortion (THD)*: <20%*

* System power factor and THD is tested and specified at 120V input and maximum load conditions.

Controls

Dimming: Forward and Reverse Phase Dimming
Phase-Cut Dimmers & Dimming (See Table)

Ambient Temperature

TYPE	TEMPERATURE RATE
OPERATING TEMPERATURE	10°C up to 35°C (50°F to 95° F)

Lumen Maintenance

LXX(10K) @ Hours 50,000 HR
L85

ADDITIONAL FEATURES

- **Mounting:**
 - Global GES Ecosystem 1 & 2 circuit
 - Lytespan 1 & 2 circuit
 - Lightolier Lytespan 1 & 2 circuit
 - Juno/Contech 1 & 2 circuit

Design Life & Warranty

- RoHS compliant
- LM-79, LM 80 tests and reports are performed in accordance to IESNA standards.
- **Current's Limited 5-year Warranty:**
Please see website.


CUSTOMER NAME

Project Name _____

Date _____ Type _____


Catalog Number _____

Product Dimensions

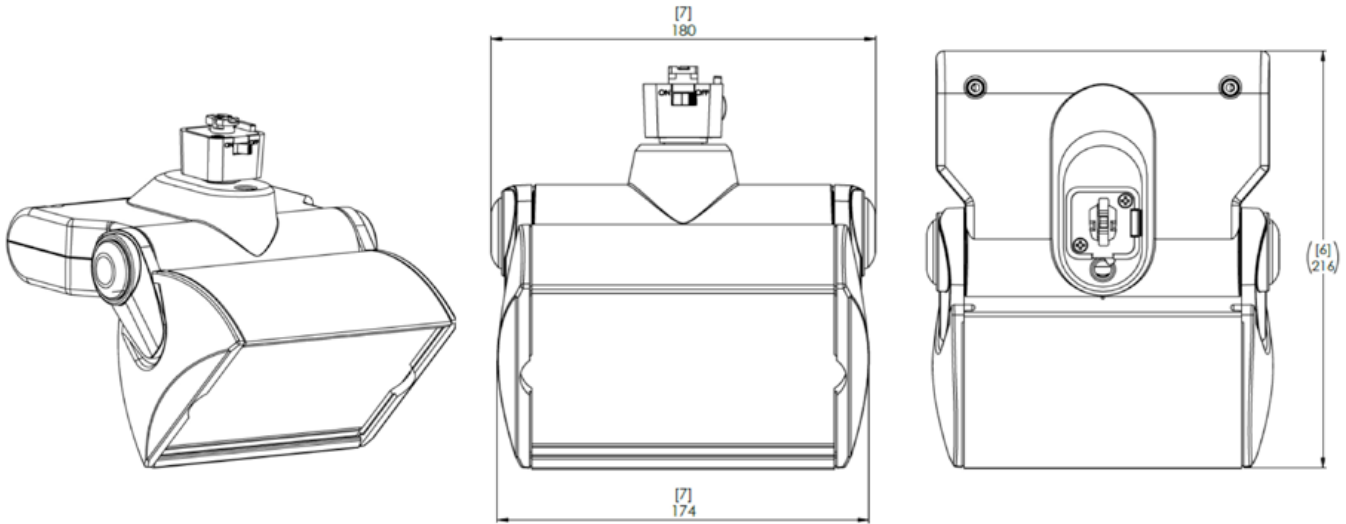

Photometric Data

LTQ Series
90 CRI
3000K
 2756 LM
 LTQIDA127WW930PQX1XXXX

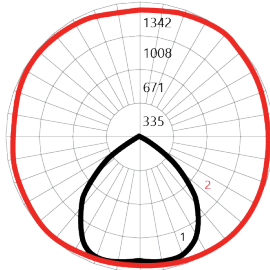

ZONE	LUMENS
0-10	120.29
10-20	367.32
20-30	569.45
30-40	651.26
40-50	553.33
50-60	309.36
60-70	125.07
70-80	47.86
80-90	12.53

ZONE	LUMENS	% OF LAMP	% OF FIXTURE
0-30	1057.06	38.40	38.30
0-40	1708.32	62.00	62.00
0-60	2571.01	93.30	93.30
0-90	2756.46	100.00	100.0
0 - 180	2756.46	100.00	100.0