



## LVT 22 Series

Volumetric T-Grid | 2' x 2' LED Recessed Luminaire

**Lumination® LVT Series** Recessed LED Luminaires bring a three-dimensional volumetric designer's touch to any T-Grid drop ceiling landscape. A matte finish, curved or rectangular diffused lens with no unsightly ribs offers smooth uniform light, excellent efficiency and reduced glare to create visual interest in any ceiling. LVT also offers Daintree Controls options and is ideal for commercial office, education, or healthcare applications for both new construction and retrofit solutions.

### CONSTRUCTION

<b>Housing:</b>	Steel, electrogalvanized, cold-rolled
<b>Lens:</b>	Precision formed diffuse lens
<b>Paint:</b>	Highly reflective matte finish
<b>Weight:</b>	<11 lb
<b>Optical Assembly:</b>	Precision formed optical lens/diffuser and technically balanced for efficacy, and transmissivity. This offers smooth uniform light (no pixels or stripes) and no dark areas on lens.

### OPTICAL SYSTEM

<b>Lumens:</b>	2000-5000
<b>Wattage:</b>	Standard: 16.5 -41.0 watts High Performance: 15.5 - 31.0 watts
<b>Efficacy:</b>	Standard: 108 - 122 LPW High Performance: 129 LPW
<b>CCT:</b>	3000K, 3500K, 4000K, 5000K
<b>CRI:</b>	80+, Trigain® >90
<b>Color Consistency:</b>	Central limit 4-Step MacAdam Ellipse with LED recipe approach for tight unit to unit color control
<b>R9:</b>	>0 (835/840/850), >90 (T35,T40)

### ELECTRICAL

<b>Input Voltage:</b>	120-277V & 347V
<b>Input Frequency:</b>	50/60Hz
<b>Power Factor (PF)*:</b>	>0.9*
<b>Total Harmonic Distortion (THD)*:</b>	<20%*
<b>Surge Protection:</b>	ANSI C82.77 Compliant
<b>LED Driver Type:</b>	Class 2

\* PF and THD may vary with options

### CONTROLS

<b>Dimming:</b>	Standard 0-10VDC, 10%
<b>Controls/Sensor:</b>	High-end trim, occupancy and ambient light detection with dimming available. Wireless Daintree® options available.
<b>DLC 5.1 LLLC:</b>	Integrated/embedded networked lighting control, luminaire-level lighting control (LLLC)

### AMBIENT TEMPERATURE

TYPE	TEMPERATURE RATE
<b>OPERATING TEMPERATURE</b>	-20°C to +35°C (-4°F to 95° F)
<b>STORAGE TEMPERATURE</b>	-40°C to +70°C (-40°F to 158° F)

### LUMEN MAINTENANCE

LUMINAIRE LUMEN DEPRECIATION @ 50,000 HR	STANDARD PERFORM. REPORTED 60,000 HR	PREMIUM PERFORM. REPORTED 36,000 HR	HIGH PERFORM. REPORTED 90,000 HR
L85	L88	L90	L77

### ADDITIONAL FEATURES

- **Typical Mounting:** Fits standard T-Bar grid (drop ceilings)
- **Wiring Access:** ½" trade-size KOs on a removable access plate provided
- **T-Grid Clips:** T-Grid clips included on fixture body, with holes for seismic wires
- **Surface Mounting:** Surface mount kit available
- **Optional Emergency Battery:** Provides 90-minutes of Emergency lighting. Note: EL option is not available with 347V option, test button is remote mounted in the field.
- **Optional Chicago Plenum:** Openings in recessed fixture sealed per requirements for CCEA.

### DESIGN LIFE & WARRANTY

- **Reliability Testing:** Components and/or systems evaluation at extreme conditions and monitored during production.
- Please refer to the DLC QPL website for the latest and most complete information: <http://www.designlights.org/QPL>
- Damp Location Rated
- Type IC Rated
- RoHS compliant
- **Current's Limited 5-year Warranty:** Please see website.



## CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## ORDERING INFORMATION

**LVT**   **22**   **B**   -   **XX**   - -   - -   - -   **LT**

PRODUCT ID	FAMILY TYPE	GEN.	VOLTAGE	NOMINAL LUMENS	DISTRIBUTION	CRI/CCT	CONTROLS	MOUNTING	FINISH	OPTIONS
LVT = Lumination® Volumetric T-Grid	22 = 2' x 2'	B = 2 <sup>nd</sup> Gen	O = 120 - 277 D = 347	XX = Nominal Lumen Level	MM = Med. Curved SS = Med. Rectangular	830 = 80CRI, 3000K 835 = 80CRI, 3500K 840 = 80CRI, 4000K 850 = 80CRI, 5000K T35 = TriGain, 90CRI®, 3500K T40 = TriGain, 90CRI®, 4000K	SEE CHART BELOW	LT = T-Grid	WHT = White WHAM = White Antimicrobial Paint	(blank) = None CP = Chicago Plenum EL <sup>3</sup> = Emergency Battery B2 <sup>4</sup> = Emergency Bypass -Dual Shunt Relay to be used with building generator back up systems to override dimming -Not available in 347V -Not available with Emergency Light -Not available with Lutron Vive Controls LB or LU DF <sup>9</sup> = Dim-to-off (must be ordered with V1 Controls code) HP <sup>5</sup> = High Performance W3 = 6' Whip, 4 Wire: Ground, L1, L2, EL Sense W5 = 6' Whip, 6 Wire: Ground, L1, L2, EL Sense, dimming leads



STANDARD PERFORMANCE <sup>5</sup> :			
EXAMPLE CONFIGURATION	LUMINAIRE LUMENS	LUMINAIRE TOTAL SYSTEM WATTS	LUMINAIRE LPW
LVT22B020MM8_ _VQLTWHITE	2000	16.5	121
LVT22B033MM8_ _VQLTWHITE	3300	29.0	114
LVT22B040MM8_ _VQLTWHITE	4000	37.0	108
LVT22B050MM8_ _VQLTWHITE	5000	41.0	122

HIGH PERFORMANCE <sup>5</sup> : (ONLY AVAILABLE IN 90 CRI)			
EXAMPLE CONFIGURATION	LUMINAIRE LUMENS <sup>6</sup>	LUMINAIRE TOTAL SYSTEM WATTS	LUMINAIRE LPW
LVT22B020MMT_ _VQLTWHITEHP	2400	19.0	126
LVT22B033MMT_ _VQLTWHITEHP	3300	25.5	129
LVT22B040MMT_ _VQLTWHITEHP	4000	31.0	129

### Ordering Notes:

- Contact manufacturer for lead times
- Most commonly ordered for Daintree Enterprise Wireless Enabled
- Test switch is remote mounted in the ceiling, EL option not available in 347V
- Contact manufacturer prior to ordering to confirm application
- Most Standard and HP (High Performance) base SKU's are DLC, there are exceptions for 347V and EL for meeting PF and/or THD results. Please check the DLC QPL
- 5000 Lumens not available in High Performance
- See product specifications section: Controls on page 4 for additional Daintree system details
- 90 CRI Trigain® is only available on HP (high performance) SKU's
- Must be ordered with V1 (1% Diming) controls code
- Not available with Emergency Bypass option

CONTROLS CODE	DESCRIPTION
V1	0-10v Dimming (1%)
VQ	0-10v Dimming
TQ <sup>2</sup>	Daintree Enterprise Wireless Enabled
TS	Daintree Enterprise Wireless Enabled with Daintree WFA100
TZ	Daintree Enterprise Wireless with fixture integrated sensor
TT	Daintree EZ Connect Wireless with fixture integrated sensor
T1 <sup>4</sup>	Daintree One with fixture integrated sensor with factory programmed preset
SQ	Digital Input Driver (does not have 0-10v input) that uses a field installed accessory (in the ceiling -not the fixture) that is Daintree compatible such as Daintree One, EZ Connect or Enterprise sensors
LB <sup>10</sup>	Lutron Vive - VDO or DFCSJ OEM OCC Integral Fixture Control with Sensor Daylight and Occupancy
LU <sup>10</sup>	Lutron Vive - VRF or DFCSJ OEM RF Integral Fixture Control (RF only) No sensor

ACCESSORIES	DESCRIPTION CODE	PRODUCT CODE
Drywall Mount Kit 2'x2'	GESK07	67657
2'x2' Surface Mount Kit	B22 SMK	212462

SENSOR KIT (FOR SQ CONTROL OPTION ONLY)	PRODUCT CODE
Daintree One/EZ Connect: LSAATT/T1FM6 (WIT100 Sensor Kit)	93098472
Daintree Enterprise: LSAATZFM6(WIZ100 Sensor Kit)	93098473
Daintree Ent. Multi Sensor: LSAATMFM6 (WMZ10 Sensor Kit)	93119594


### CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_


### PRODUCT DIMENSIONS

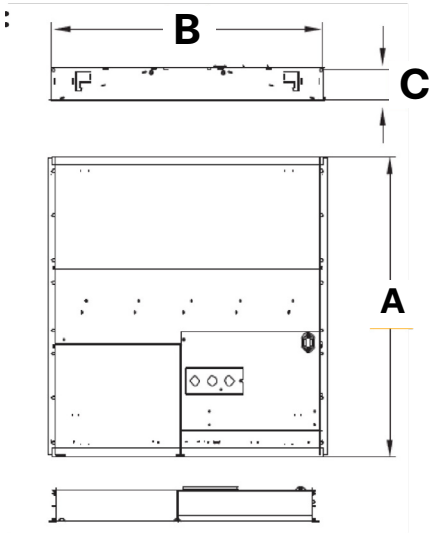

<b>A</b>	23.8 in
<b>B</b>	23.8 in
<b>C</b>	2.7 in

### PHOTOMETRIC DATA:

**LVT 22**  
3299.98 LM



ZONE	LUMENS
0-10	105.23
10-20	302.53
20-30	460.02
30-40	557.81
40-50	583.15
50-60	532.83
60-70	414.99
70-80	251.86
80-90	79.83
90-100	1.97
100-110	1.63
110-120	1.59
120-130	1.54
130-140	1.52
140-150	1.37
150-160	1.04
160-170	0.78
170-180	0.29

ZONE	LUMENS	% OF FIXTURE
0-20	407.76	12.40
0-30	867.78	26.30
0-40	1425.59	43.20
0-60	2541.57	77.00
0-80	3208.42	97.20
0-90	3288.25	99.60
10-90	3183.02	96.50
20-40	1017.82	30.80
20-50	1600.97	48.50
40-70	1530.98	46.40
60-80	666.85	20.20
70-80	251.86	7.60
80-90	79.83	2.40
90-110	3.60	0.10
90-120	5.19	0.20
90-130	6.73	0.20
90-150	9.62	0.30
90-180	11.73	0.40
110-180	8.13	0.20
0-180	3299.98	100.00

## CUSTOMER NAME

Project Name \_\_\_\_\_

Date \_\_\_\_\_ Type \_\_\_\_\_

Catalog Number \_\_\_\_\_

## DAINTREE CONTROLS

---

**Daintree® Wireless Controls:**

There is no one size fits all for wireless controls. Some networks want simple solutions that reduce energy consumption and meet code compliance while others are more ambitious, looking to capitalize on the LED and controls savings to fund a scalable, enterprise-grade, internet of things solution. The advantage of the Daintree® Wireless platform is its ability to integrate into indoor, outdoor and high bay environments. The Daintree® Wireless Controls provide the infrastructure to future proof your buildings, easily upgrade to Networked solutions and provide the ability to integrate into IoT solutions that are right for your business.

- **Daintree® One:** Standalone Wireless Controls
- **Daintree® EZ Connect:** Room-Based Wireless Lighting Controls
- **Daintree® Networked:** Networked Lighting Controls for Smart Building & IoT Enablement.

Daintree® Wireless Controls are already integrated in your favorite Current LED fixtures. Integrating the controls into the fixture cuts labor costs considerably since the sensors are already embedded in the lighting fixtures. There's no need to get above the ceiling plenum and install additional devices. Visit our website [LED.com](http://LED.com) for a complete list of LED Fixtures.

**DLC5.1 LLLC:**

Integrated/embedded networked lighting control, luminaire-level lighting control (LLLC). When deployed in an EZ Connect application the sensor is designed for persistent lighting control as a standalone lighting control in case of a wireless network communication failure