





CLASS 2



P/N: M20L12DC-AR






MAGNETIC DIMMABLE CLASS 2 LED DRIVER

Magnitude's M20L12DC-AR is the most compact LED driver on the market with a magnetic transformer core. It is equipped with two auto-reset breakers, one on the input and one on the output, which protect both the load and driver. The driver is encased in a coated metal box that includes 2 knock-outs, one on each side, to enable easy installation that complies with electrical code requirements.

QUICK SPECS

Input Voltage	Max Output Power	Output Voltage	Output Current	Efficiency @ Max Load	Power Factor @ Max. Load	Envir. Protection Rating	Weight
120VAC	20W	12VDC	1.9 A	> 74%	> 0.81	NEMA 3R	35oz

WIRING DIAGRAM

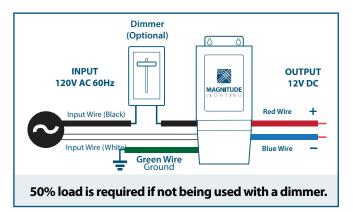



FEATURES

- Dimmable with any standard MLV/Incandescent TRIAC- (Leading edge) dimmer switch
- Dim down to 1%
- Dual protection primary and secondary auto-reset circuit breakers
- Nema 3R Outdoor Use
- Two knock-outs one on each side
- Class 2
- ETL Listed
- Certified to CSA Standard

ENCLOSURE DETAILS In. (mm)

Length	5.6 (142.2)		
Width	2.14 (54.3)		
Height	2 (50.8)		







M-SERIES MAGNETIC DIMMABLE CLASS 2 LED DRIVER

SPECIFICATIONS


Input				
Input Voltage	120VAC			
Input Current @ Max Load	0.31 A			
Power Factor	> 0.81			
Efficiency	> 74%			
Output				
Max Load	20W			
Output Voltage	11.6 VDC @ Full Load			
Output Current @ Max Load	1.9 A			
Open Circuit Output Voltage	12.4 VDC			
Coil Former	Double Section Bobbin			
Envrionmental				
Operating Temperature	-30°c - 45°c (-22°F - 113°F)			
Min Installation space between drivers	5″Inch			
Thermal Class	B130°c			
Dimming				
Minimum Dimming Level	1%			
Protections				
Circuit Breaker	Primary and secondary auto-reset			
Mechanical & Housing				
Leads Primary	PVC 600V #20			
Leads Secondary	PVC 300V #16			
Length	5.6" (142.2mm)			
Width	2.14" (54.3mm)			
Height	2" (50.8mm)			
Weight	35oz (990grams)			
Housing Material	Coated metal			
Housing Color	Black			
Junction Box	Yes			
Mounting	Two Hole flange mounting			
Approval Markings				

MECHANICAL DIAGRAM

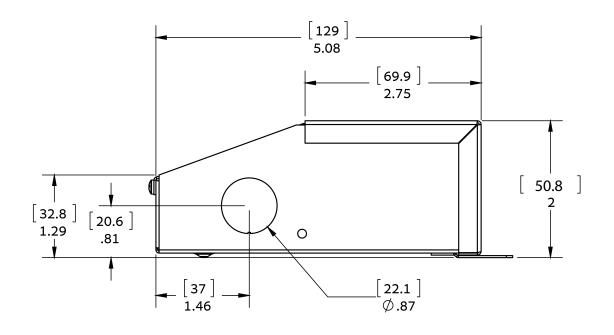

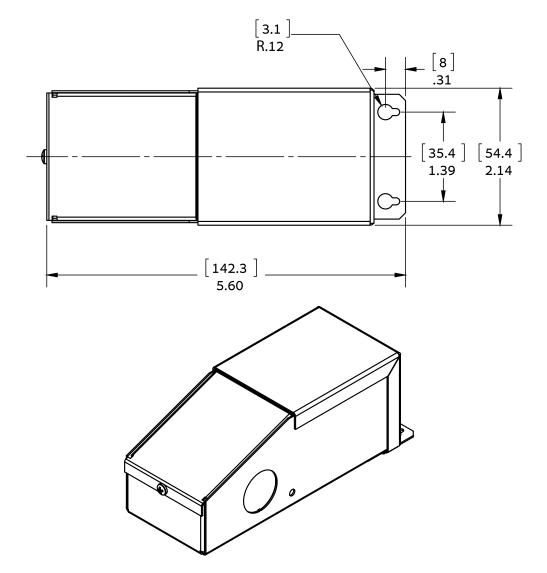

MAGNETIC DIMMABLE CLASS 2 LED DRIVER

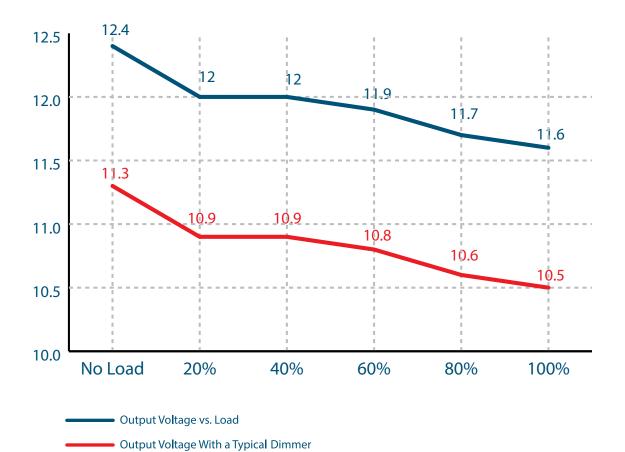

page 4

WE **DRIVE** LIGHT

