



## ACCESSORIES



**INTERNAL HONEYCOMB LOUVERS — IHL**  
Hexagonal cell louver with 45° cut-off.






**LINEAR SPREAD FILTER — LSF**  
6.68" diameter, spreads the beam of light along one axis only. May be oriented to spread the light horizontally or vertically.






**POTTING COMPOUND — PC21**  
Re-enterable potting compound which pours yellow and cures transparent so connections are easily located. It meets NEC requirements for potting junction boxes and is recommended as part of the installation in areas with high water tables, poor drainage or are prone to flooding to protect the junction box from water intrusion. Sold separately.

## DIMENSIONS

MACSC LED Array Module



MHSLC94 Driver Module

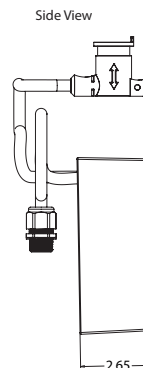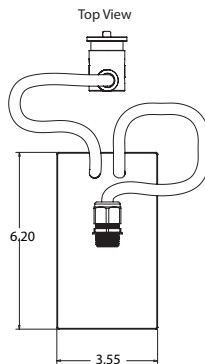

## CROSS-OVER GUIDE

### LED MODULE

EXAMPLE:

Old Nomenclature - MACS 100Q MFL FLC LP

New Nomenclature - MACSC LED 40K MFL FLC

Model		Color Temperature		Distribution		Lens	
Old	New	Old	New	Old	New	Old	New
ACS	MACSC	Incandescent	30K	NSP	NSP	FLC	FLC
MACS		Metal Halide T4, T6, PAR20	30K	SP		FLC5	FLC5
		Metal Halide E17 or PAR30	40K	NFL	NFL	FLC10	FLC10
		Fluorescent	27K-35K	MFL	MFL	FLC20	FLC20
				FL	FL	FLCAS	FLCAS
				WFL	WFL	FLCSR	FLCSR
				WWD	WWD		

### POWER MODULE

EXAMPLE:

Old Nomenclature - MHSL94 100Q 120

New Nomenclature - MHSLC94 LED P2 MVOLT

Model		Performance Package		Voltage	
Old	New	Old	New	Old	New
HSL	MHSLC94 LED	M20	P1	120	MVOLT
MHSLC94		M35		208	
	M50	220			
	P2038I	P2	240		
	P3038I		277		
	100Q		MVOLT		
	20CMT4	P3	347	not available	
	35CMT4				
	35CMT6				
	70CMT6				
	P2035CM				
	P3035CM				
	P3070CM	P4			
	18TRT				
	26TRT				
	32TRT				

## SPECIFICATIONS AND FEATURES

**LED MODULE:** Stainless steel housing, factory-sealed and purged of all moisture for longer component life. Lens is sealed with silicone gasket and stainless steel clamp band assembly with single fastener. Electrical connection to lamp module is done through a submersible quick pull plug connector with goldplated contacts.

**LED:** White LEDs, in 2700K 3000K, 3500K, 4000K and 5000K and AMBLW. All within 3 MacAdam ellipses

**VOLTAGE:** MVOLT (120 - 277 volt), 50/60HZ.

**POWER MODULE:** LED driver is encapsulated in a custom designed heat-dissipating epoxy resin that also eliminates all moisture intrusion. Module is provided with submersible rated cord leads for connection to integral junction box and lamp module.

**NOTE:** Potting compound (PC21) recommended for junction box splices. PC21 sold separately.

**BUY AMERICAN ACT:** This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT regulations. Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**LISTING:** cCSAus, suitable for wet locations, laboratory tests conducted by CSA to UL Standard UL-1598 and UL-8750

**WARRANTY:** 5-year limited warranty. This is the only warranty provided and no other statements in this specification sheet create any warranty of any kind. All other express and implied warranties are disclaimed. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

Consult factory for details.

**NOTE:** Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.