



T-3 1/4 MINIATURE BAYONET & SCREW BASE SINGLE CHIP LEDs

ORDERING INFORMATION: MB1131 WC 2 - 24V/25 - PC
(A) (B) (C) (D) (E)

(A) MODEL

MB1131
MS1131

(B) LENS COLOR

WC = WATER CLEAR
WD = WHITE DIFFUSED

(C) LED EMITTING COLOR & WAVELENGTH

1= ULTRA RED (660nm) **OBSOLETE**
U2= ULTRA HI EFF. RED (623- 630nm)
U3= ULTRA ORANGE (612- 620nm)
U4= ULTRA YELLOW (590-595nm)
*6NW= ULTRA PURE GREEN (520-530nm)
*8NW= FLUORESCENT "WHITE" (NO nm VALUE)
*10NW=ULTRA BLUE (465-475nm)
*12NW=SOFT WHITE (NO nm VALUE)
ALSO AVAILABLE IN STANDARD COLORS

(D) STANDARD DC & AC OPERATING VOLTAGES/mA

6V/25, 12V/25, 24V/25, 28V/25, 48V/12, 60V/15 & 120V/6
APPLICATION MUST BE SPECIFIED WHEN ORDERING
E.G. VAC= ALTERNATING CURRENT, VDC(V)= DIRECT CURRENT

***MAX CONTINUOUS CURRENT @ 120/6mA**

***VOLTAGES FROM 5-60V/10mA**

***VOLTAGES FROM 6-48V: AVAILABLE IN ULTRA COLORS ONLY**

NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES.

(E) CENTER CONTACT POLARITY

PC= POSITIVE CENTER
NC= NEGATIVE CENTER
DP= DUAL POLARITY

DIRECT INCANDESCENT LAMP REPLACEMENTS


MB: 6MB, 14MB, 24MB, 28MB, 48MB, 60MB, 120MB, 1819, 1828, 1835, ETC.

MS: 40, 46, 1487, 1821, 1832 ETC.

HOUSING MAT'L. UL94VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

MODEL: MB1131

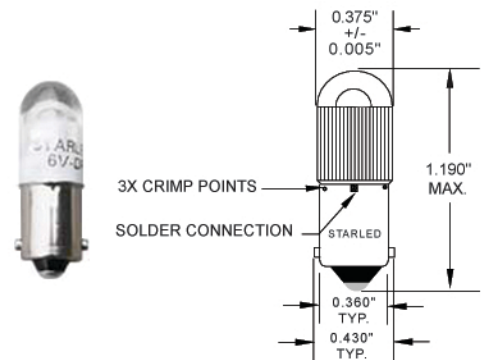

MODEL: MS1131

