STARLED®, INC.

T-3 ¼ MINIATURE BAYONET & SCREW BASE MULTI-CHIP LEDS

ORDERING INFORMATION: MB1136 (A) WC (B) 2 (C) - 24V/25 (D) - PC (E)

(A) MODEL
MB1136
MS1136

(B) LENS COLOR
WC = WATER CLEAR
WD = WHITE DIFFUSED

(C) LED EMITTING COLOR & WAVELENGTH
1= ULTRA RED (660nm)
2= STD. RED (630- 635nm)
U2= ULTRA HI EFF. RED (623- 630nm)
3= STD. ORANGE (605- 610nm)
U3= ULTRA ORANGE (612- 620nm)
4 = STD. YELLOW (585nm)
U4= ULTRA YELLOW (590-595nm)
5= STD. GREEN (565-570nm)
*6NW= ULTRA PURE GREEN (520-530nm

MODEL: MB1136

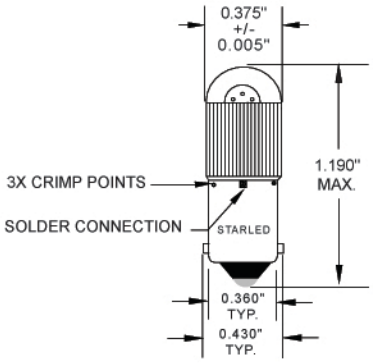

(D) STANDARD DC & AC OPERATING VOLTAGES/mA
***2 CHIP LED:** 5V/20, 6V/20, 12V/20, 14V/20, 24V/15, 28V/15
****3 CHIP LED:** 24V/10, 28V/10, 36V/10, 48V/10, 60V/10 & 120V/6
6 CHIP LED: 6V/45, 12V/30, 14V/30, 24V/15, 28V/15, 36V/12, 48V/12, 60V/15 & 120V/6
***MAX CONTINUOUS 20mA**
***MAX CONTINUOUS 10mA**
APPLICATIONS MUST BE SPECIFIED WHEN ORDERING:
VAC= ALTERNATING CURRENT VDC(V)= DIRECT CURRENT
NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES

MODEL: MS1136

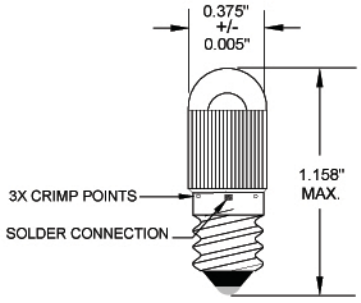

(E) CENTER CONTACT POLARITY
PC= POSITIVE CENTER
NC= NEGATIVE CENTER
DP= DUAL POLARITY

DIRECT INCANDESCENT LAMP REPLACEMENTS
MB: 6MB, 14MB, 24MB, 28MB, 48MB, 60MB,120MB, 1819, 1828, 1835, ETC.
MS: 40, 46, 1487, 1821, 1832 ETC.

HOUSING MAT'L. UL94VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

2059 E. DEL AMO BLVD. * RANCHO DOMINGUEZ, CA 90220 * TEL: (310) 603-0403 * FAX: (310) 603-1335