



T3-1/4 MINIATURE BAYONET & SCREW BASE 5, 6 & 7 CLUSTER LEDES

ORDERING INFORMATION:

MB119 5 WC 1 - 24V/25 - DP (A) (B) (C) (D) (E) (F)

(A) MODEL

MB119, MS119
MBF119, MSF119 (FLAT-TOP)

(B) NUMBER OF LEDES

5 = 5, T1 3mm CLUSTER LED
6 = 6, T1 3mm CLUSTER LED
7 = 7, T1 3mm CLUSTER LED

(C) LED LENS COLOR

WC = WATER CLEAR

(D) LED EMITTING COLOR & WAVELENGTH

- 1 = ULTRA RED (660nm)
 - 2 = STD. RED (630-635nm)
 - U2 = ULTRA HI EFF. RED (623-630nm)
 - 3 = STD. ORANGE (605-610nm)
 - U3 = ULTRA ORANGE (612-620nm)
 - 4 = STD. YELLOW (585nm)
 - U4 = ULTRA YELLOW (590-595nm)
 - 5 = STD. GREEN (565-570nm)
 - 6NW = ULTRA PURE GREEN (520-530nm)
 - 8NW = FLUORESCENT "WHITE" (NO nm VALUE)
 - *10NW = ULTRA BLUE (465-475nm)
 - *11NW = BLUSH GREEN (498-508nm)
 - *12NW = SOFT WHITE (NO nm AVAILABLE)
- * Max. Continuous current 10mA.

(E) STANDARD DC & AC OPERATING VOLTAGES/MA

5 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/15, 48V/12, 60V/15 & 120V/10
6 CLUSTER LED: 5V/75, 6V/75, 12V/50, 14V/50 & 24V/25
7 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/15, 48V/12, 60V/15 & 120V/10

Note: Please call factory for other voltages.

(F) CENTER CONTACT POLARITY


DP = DUAL POLARITY

DIRECT INCANDESCENT LAMP REPLACEMENTS


6MB, 14MB, 24MB, 28MB, 48MB, 60MB, 120MB, 1819, 1828, 1835, ETC...
40, 46, 1481, 1487, 1821, 1832, ETC...

HOUSING MAT'L. UL94VO APPROVED


SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

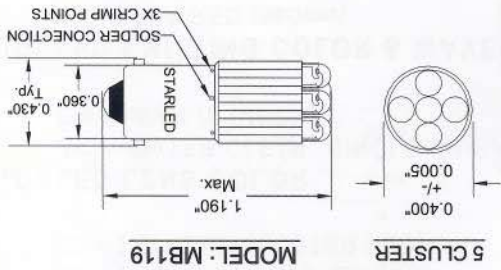

5 CLUSTER

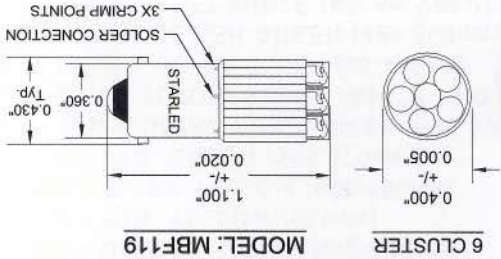

6 CLUSTER

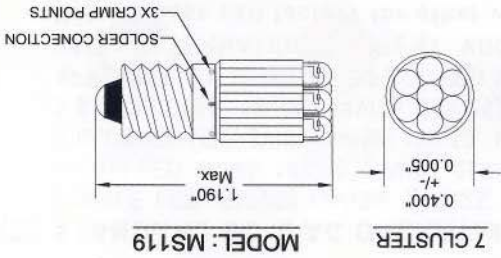

7 CLUSTER