



STARLED[®], INC.

BASED LED S

T-3¼ MINIATURE BAYONET BASE 4, 5, & 7 CLUSTER LEDs

ORDERING INFORMATION:

MB44 4 WC 2 - 24V/25 - DP
(A) (B) (C) (D) (E) (F)

(A) MODEL

MB44

(B) NUMBER OF LEDs

4 = 4, T1-3/4 CLUSTER LED

5 = 5, T1-3/4 CLUSTER LED

7 = 7, T1-3/4 CLUSTER LED

(C) LED LENS COLOR

WC = WATER CLEAR

(D) LED EMITTED COLOR & WAVELENGTH

2 = STD. RED (630nm) OBSOLETE

U2 = ULTRA HI EFF. RED (623-630nm)

3 = STD. ORANGE (605-610nm)

U3 = ULTRA ORANGE (612-620nm)

4 = STD. YELLOW (585nm)

S4 = ULTRA YELLOW (590-595nm)

5 = STD. GREEN (565-570nm)

*6NW = ULTRA PURE GREEN (520-530nm)

*8NW = FLUORESCENT "WHITE" (NO nm VALUE)

*10NW = ULTRA BLUE (465-475nm)

*12NW = SOFT WHITE (NO nm VALUE)

*Max. Continuous current 10mA.

(E) STANDARD DC & AC OPERATING VOLTAGES/mA

4 CLUSTER: 6V/50, 12V/25, 24V/25, 28V/25, 36V/15, 48V/12, 60V/15 & 120V/10

5 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/15, 48V/12, 60V/15 & 120V/10

7 CLUSTER: 24V/25, 28V/25, 36V/25, 48V/12, 60V/15 & 120V/10 **Note: Please call factory for other voltages.**

(F) CENTER CONTACT POLARITY

DP = DUAL POLARITY

DIRECT INCANDESCENT LAMP REPLACEMENTS


6MB, 14MB, 24MB, 28MB, 48MB, 60MB, 120MB, 1819, 1828, 1835, ETC...

Note: Please check your lamp holder inside dia. for proper fit.

HOUSING MAT'L. UL94-V0 APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

MODEL: MB44

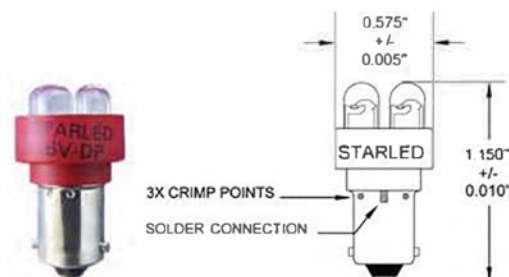

MODEL: MB445

