



SINGLE CHIP LED Ba7s BAYONET BASE

ORDERING INFORMATION: MBE921 WC 1 - 24V/25 - PC
(A) (B) (C) (D) (E)

(A) MODEL

MBE921 (DOME LED LENS)
MBEF921 (FLAT-TOP LED LENS)


MODEL: MBE921

(B) LED LENS COLOR

WC = WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH

- U2 = ULTRA HI EFF. RED (623-630nm)
- U3 = ULTRA ORANGE (612-620nm)
- *S4 = ULTRA YELLOW (590-595nm)
- *6NW = ULTRA PURE GREEN (520-530nm)
- *8NW = FLUORESCENT "WHITE" (NO nm VALUE)
- *10NW = ULTRA BLUE (465-475nm)
- *11NW = BLUISH GREEN (498-508nm)
- *12NW = SOFT WHITE (NO nm VALUE)
- *Max. Continuous current 10mA.

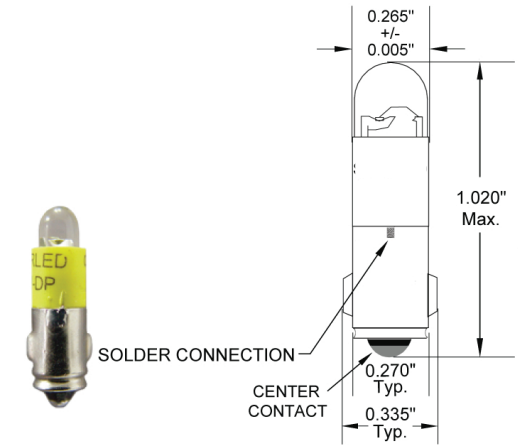

(D) STANDARD DC & AC OPERATING VOLTAGES/mA

5V/25, 12V/25, 20V/25, 24V/25, 28V/25, 36V/12, 48V/12 & 60V/15
APPLICATION MUST BE SPECIFIED WHEN ORDERING:
VAC = ALTERNATING CURRENT VDC(V) = DIRECT CURRENT
Note: Please call factory for other voltages.

MODEL: MBEF921

(E) CENTER CONTACT POLARITY

PC = POSITIVE CENTER, NC = NEGATIVE CENTER
DP = DUAL POLARITY NOT AVAILABLE.

DIRECT INCANDESCENT LAMP REPLACEMENTS

(MF) 327, 328, 330, 349, 459, ETC...

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

