

FLAT-TOP & DOMED SINGLE CHIP LED T3-1/4 BAYONET BASE LEDs

ORDERING INFORMATION: MB116 1 WC 1 - 24V/25 - DP
(A) (B) (C) (D) (E) (F)

(A) MODEL

MB116 = PLAIN SLEEVE DOMED LED
RMB116 = RIBBED SLEEVE DOMED LED
MBF116 = PLAIN SLEEVE FLAT-TOP LED
RMBF116 = RIBBED SLEEVE FLAT-TOP LED

(B) NUMBER OF LEDs

1 = 1, SINGLE CHIP T1-3/4 LED

(C) LED LENS COLOR

WC = WATER CLEAR

(D) LED EMITTING COLOR & WAVELENGTH

- 1 = ULTRA RED (660nm)
- 2 = STD. RED (630-635nm)
- U2 = ULTRA HI EFF. RED (623-630nm)
- 3 = STD. ORANGE (605-610nm)
- U3 = ULTRA ORANGE (612-620nm)
- 4 = STD. YELLOW (585nm)
- U4 = ULTRA YELLOW (590-595nm)
- 5 = STD. GREEN (565-570nm)
- * 6NW = ULTRA PURE GREEN (520-530nm)
- * 8NW = FLUORESCENT "WHITE" (NO nm VALUE)
- * 10NW = ULTRA BLUE (465-475nm)
- * 11NW = BLUISH GREEN (498-508nm)
- * 12NW = SOFT WHITE (NO nm VALUE)
- * **Max. Continuous current 10mA.**

(E) STANDARD DC & AC OPERATING VOLTAGES/mA

SINGLE LED: 5V/25, 12V/25, 24V/25, 28V/25, 36V/12, 48V/12, 60V/12 & 120V/6

Max. Continuous current @ 120V/6 mA.

* Voltages from 5-60V/10mA

Note: Please call factory for other voltages.


(F) CENTER CONTACT POLARITY

DP = DUAL POLARITY


DIRECT INCANDESCENT LAMP REPLACEMENTS

6MB, 12MB, 14MB, 24MB, 28MB, 48MB, 60MB, 120MB, 1819, 1828, 1835, ETC...


MODEL: MB116

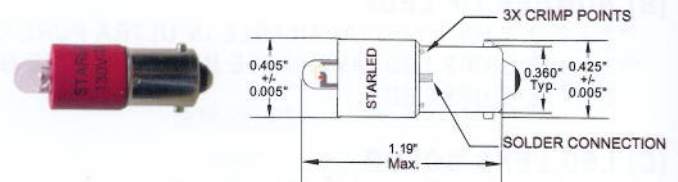

MODEL: RMB116

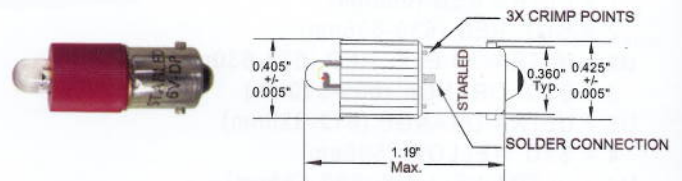

MODEL: MBF116

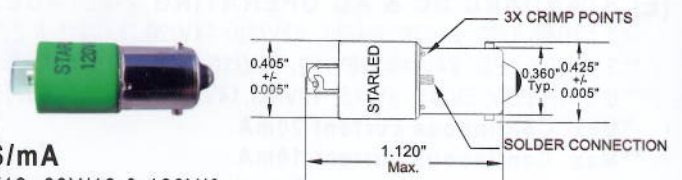

MODEL: RMBF116

