STARLED®, INC.

T-3¼ MINIATURE BAYONET BASE 4, 5, 6, & 7 FLAT-TOP CLUSTER LEDs

ORDERING INFORMATION: MBF44 (A) 4 (B) WC (C) 2 (D) - 24V/25 (E) - DP (F)

(A) MODEL
MBF44

(B) NUMBER OF LEDs
4 = 4, T1-3/4 FLAT-TOP LEDS
5 = 5, T1-3/4 FLAT-TOP LEDS **DISCONTINUED**
6 = 6, T1-3/4 FLAT-TOP LEDS
7 = 7, T1-3/4 FLAT-TOP LEDS

(C) LED LENS COLOR
WC = WATER CLEAR

(D) LED EMITTING COLOR & WAVELENGTH
1 = ULTRA RED (660nm) **OBSOLETE**
2 = STD. RED (630-635nm)
U2 = ULTRA HI EFF. RED (623-630nm)
3 = STD. ORANGE (605-610nm)
U3 = ULTRA ORANGE (612-620nm)
4 = STD. YELLOW (585nm)
*S4 = ULTRA YELLOW (590-595nm)
5 = STD. GREEN (565-570nm)
*6NW = ULTRA PURE GREEN (520-530nm)
*8NW = FLUORESCENT "WHITE" (NO nm VALUE)
*10NW = ULTRA BLUE (465-475nm)
*12NW = SOFT WHITE (NO nm VALUE)
* **Max. Continuous current 10mA**

MODEL: MBF44

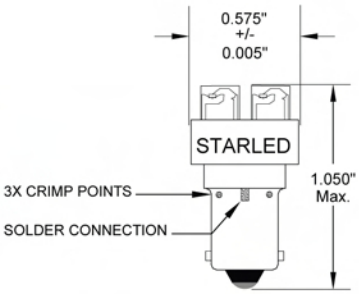

MODEL: MBF44

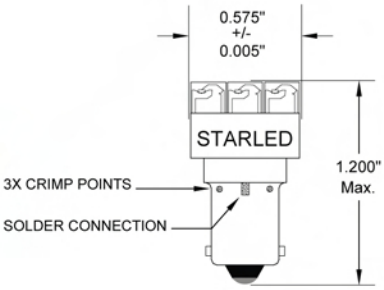

(E) STANDARD DC & AC OPERATING VOLTAGES/mA
4 CLUSTER: 6V/50, 12V/25, 24V/25, 28V/25, 36V/15, 48V/12, 60V/15 & 120V/10
5 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/15, 48V/12, 60V/15 & 120V/10
6 CLUSTER: 6V/75, 12V/50 & 14V/50
7 CLUSTER: 18V/25, 24V/25, 28V/25, 36V/25, 48V/12, 60V/15 & 120V/10
Note: Please call factory for other voltages.

(F) CENTER CONTACT POLARITY
DP = DUAL POLARITY

DIRECT INCANDESCENT LAMP REPLACEMENTS
6MB, 14MB, 24MB, 28MB, 48MB, 60MB, 120MB, 1819, 1828, 1835, ETC...
Notes: Please check your LAMP HOLDER inside Dia. for proper fit.

HOUSING MAT'L. UL94-VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

2059 E. DEL AMO BLVD. * RANCHO DOMINGUEZ, CA 90220 * TEL: (310) 603-0403 * FAX: (310) 603-1335