

Electronic H.I.D. Ballasts

100 WATT UNIVERSAL

SIDE LEAD AND BOTTOM FEED MODELS



100 Watt Universal

Only Hatch Offers:

- Ultra low Spectral Power Density
- Patented Half Bridge Technology
- Patented Automatic Lamp Crest Factor Control "ALCFC"
- Industry Leading Remote Mount Capabilities

Features

- Superior color uniformity
- Low profile, lightweight
- Excellent Lumen Maintenance
- Constant lumen output over a wide input voltage range and lamp voltage variation
- Significant energy savings as compared to magnetic ballasts
- Thermal protection
- Approved for recessed use
- Micro Processor Controlled
 - Safety Shut Down Features
 - End of Lamp Life Protection
 - Superior Hot Lamp Restrike Characteristics
- Designed, tested & approved for most Lamp Brands.
(Contact factory for approved list)
- Low Voltage Lamp Shutdown

Environmental Specifications

Minimum Starting Temperature.....-30°C
Maximum Case Temperature.....80°C
Emi/RFIComplies with FCC 18C
Sound Rating.....A
WarrantyUp to 5 Years
Safety Listing.....Type 1 Outdoor

Electrical/Mechanical Specifications


INPUT

VoltageWide range input 108-305VAC
Frequency50/60Hz
Line Regulation.....+/-0.5 output variation over full input range
Power Factor.....> 0.95
Total Harmonic Distortion.....< 10%

OUTPUT

Lamp Operating Frequency...165Hz Square Wave
Lamp Current C.F......<1.3
ALCFCYes

Weight17 oz
Case MaterialMetal
Transient ProtectionIEEE C62.412 Cat. B
Short Circuit ProtectionYes
Thermal ProtectionYes
Open Circuit / No Lamp / Hot Lamp Shutdown, Retry and Ignition Failure Protection.....Yes
Ignition failure shutdown in 5 seconds followed by multiple timed restrikes with lamp ignition or timed shutdown until power is reset (restrike timing is lamp wattage dependent).

Lamp Distance from Ballast.....Consult factory.
Lead Lengths
Side Lead Models8"
Bottom Feed Models10"
Safety Standard..... US LISTED


Electronic H.I.D. Ballasts

100 Watt Universal

DIMENSIONS

G1.


Side Leads
With Feet

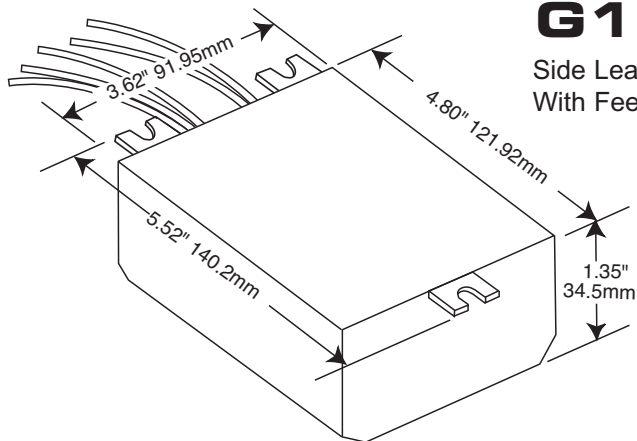

Center line to center line
is .16" less than end to
end on models with
mounting feet.


G2.

Bottom Feed

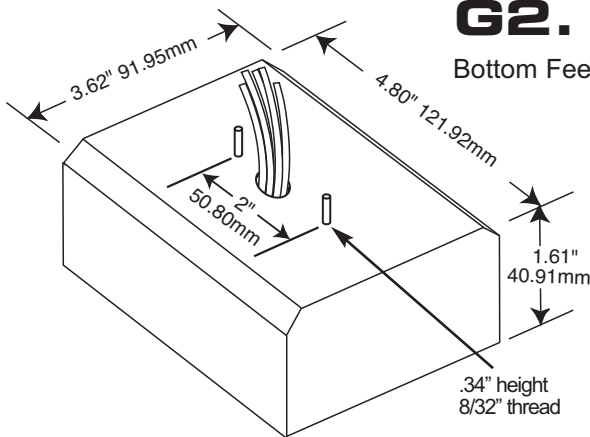


WIRING DIAGRAMS

For PAR Lamps

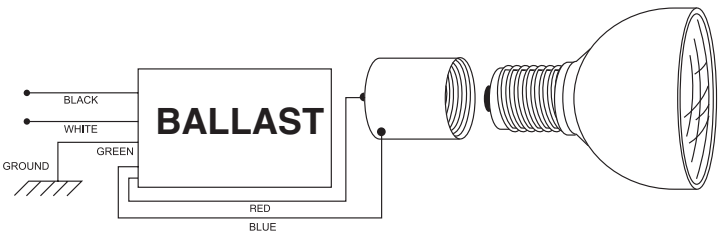

For Double Ended or Bi-Pin Lamps

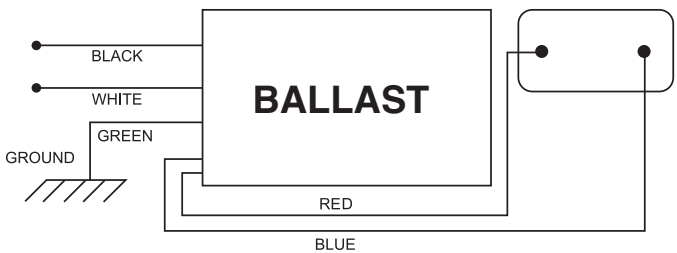

Watts	LAMP TYPES / ANSI CODES	No. Lamps	Nominal Input Power	Input Current	Case Dim.	Hatch Item Number
100	M/C90, M/C140 Ceramic	1	110 Watts	120V-.94 Amps 208V-.54 Amps 240V-.47 Amps 277V-.41 Amps	G1	MC100-1-F-UNNU-HB
					G2	MC100-1-J-UNNU-HB

Specifications subject to change without notice. 1110

**Please call your Hatch representative or refer to the latest
Hatch Electronic Ballast/Lamp Matrix for specifics.**