



T-1^{3/4} MIDGET FLANGE & GROOVE BASE SINGLE CHIP LEDs

ORDERING INFORMATION: MF631 WC 1 - 24V/25 - PC
(A) (B) (C) (D) (E)

(A) MODEL

- MF631 (DOME LED LENS)
- MFF631 (FLAT-TOP LED LENS)
- MG631 (DOME LED LENS)
- MGF631 (FLAT-TOP LED LENS)

(B) LED LENS COLOR

WC = WATER CLEAR

(C) LED EMITTING COLOR & WAVELENGTH

- 1 = ULTRA RED (660nm)
- 2 = STD. RED (630-635nm)
- U2 = ULTRA HI EFF. RED (623-630nm)
- 3 = STD. ORANGE (605-610nm)
- U3 = ULTRA ORANGE (612-620nm)
- 4 = STD. YELLOW (585nm)
- *S4 = ULTRA YELLOW (590-595nm)
- 5 = STD. GREEN (565-570nm)
- *6NW = ULTRA PURE GREEN (520-530nm)
- *8NW = FLUORESCENT "WHITE" (NO nm VALUE)
- *10NW = ULTRA BLUE (465-475nm)
- *11NW = BLUISH GREEN (498-508nm)
- *12NW = SOFT WHITE (NO nm VALUE)
- *MAX. CONTINUOUS CURRENT 10mA.

(D) STANDARD DC & AC OPERATING VOLTAGES/mA

5V/25, 12V/25, 20V/25, 24V/25, 28V/25, 36V/12, 48V/12 & 60V/15
 APPLICATION MUST BE SPECIFIED WHEN ORDERING:
 VAC = ALTERNATING CURRENT VDC(V) = DIRECT CURRENT
NOTE: PLEASE CALL FACTORY FOR OTHER VOLTAGES.

(E) CENTER CONTACT POLARITY

PC = POSITIVE CENTER, NC = NEGATIVE CENTER
 DP = DUAL POLARITY NOT AVAILABLE.


DIRECT INCANDESCENT LAMP REPLACEMENTS

MF: 327, 328, 330, 349, 459, ETC...

MG: 334, 336, 337, 346, 379, ETC...

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE.


MODEL: MF631

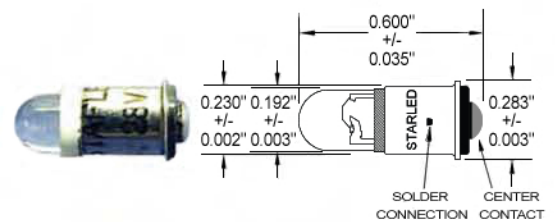

MODEL: MFF631



MODEL: MG631

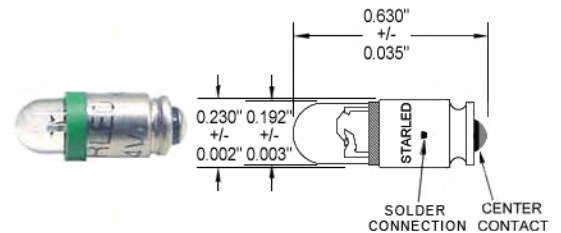

MODEL: MGF631

