



MRP LED

LED Area Luminaire




Buy American



Specifications

EPA:	1.125 ft ² (0.105 m ²)
Luminaire Height:	6-3/8" (16.2 cm)
Overall Height:	32" (81.3 cm)
Diameter:	18" (45.7 cm)
Weight (max):	37.5 lbs (17 kg)



Catalog Number

Notes

Type

Hit the Tab key or mouse over the page to see all interactive elements.

A+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and system-level interoperability.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is A+ Certified when ordered with DTL® controls marked by a **shaded background**. DTL DLL equipped luminaires meet the A+ specification for luminaire to photocontrol interoperability¹
- This luminaire is part of an A+ Certified solution for ROAM® or XPoint™ Wireless control networks, providing out-of-the-box control compatibility with simple commissioning, when ordered with drivers and control options marked by a **shaded background**¹

To learn more about A+, visit www.acuitybrands.com/aplus.

1. See ordering tree for details.
2. A+ Certified Solutions for ROAM require the order of one ROAM node per luminaire. Sold Separately: [Link to Roam](#); [Link to DTL DLL](#)



A+ Capable options indicated by this color background.

Ordering Information

EXAMPLE: MRP LED 42C 700 40K SR5 MVOLT DDBXD

MRP LED	Series	LEDs	Drive current	Color temperature	Distribution	Voltage	Mounting	
MRP LED	42C	42 LEDs (one engine)	350 350mA	30K 3000K	SR2 Type II	MVOLT ¹ 277 ²	Shipped included (blank) Fits 4" OD round pole Shipped separately ³ MRPT20 2-3/8" tenon slipfitter MRPT25 2-7/8" tenon slipfitter	
			530 530mA	40K 4000K	SR3 Type III	120 ² 347 ²		MRPT30 3-1/2" tenon slipfitter
			700 700mA	50K 5000K	SR4 Type IV	208 ² 480 ²		MRPT35 4" tenon slipfitter
			1000 1000mA (1A)		SR5 Type V	240 ²		MRPF3 3" OD round pole adapter MRPF5 5" OD round pole adapter ⁴

Control options	Other options	Finish (required)
Shipped installed PER NEMA twist-lock receptacle only (control ordered separate) PER5 Five-wire receptacle only (control ordered separate) ⁵ PER7 Seven-wire receptacle only (control ordered separate) ⁵	PNMTDD3 Part night, dim till dawn ⁶ PNMT5D3 Part night, dim 5 hrs ⁶ PNMT6D3 Part night, dim 6 hrs ⁶ PNMT7D3 Part night, dim 7 hrs ⁶	SF Single fuse (120, 277, 347V) ² DF Double fuse (208, 240, 480V) ² DDBXD Dark bronze DBLXD Black DNAXD Natural aluminum DWHXD White DDBTXD Textured dark bronze DBLBXD Textured black DNATXD Textured natural aluminum DWHGXD Textured white



Ordering Information

Accessories

Ordered and shipped separately.

DLL127F 1.5 JU	Photocell - SSL twist-lock (120-277V) ⁷
DLL347F 1.5 CUL JU	Photocell - SSL twist-lock (347V) ⁷
DLL480F 1.5 CUL JU	Photocell - SSL twist-lock (480V) ⁷
DSHORT SBK U	Shorting cap ⁷
MRPT20 DDBXD U	2-3/8" tenon slipfitter (specify finish)
MRPT25 DDBXD U	2-7/8" tenon slipfitter (specify finish)
MRPT30 DDBXD U	3-1/2" tenon slipfitter (specify finish)
MRPT35 DDBXD U	4" tenon slipfitter (specify finish)
MRPF3 DDBXD U	3" OD round pole adapter (specify finish)
MRPF5 DDBXD U	5" OD round pole adapter (specify finish) ³

For more control options, visit [DTL](#) and [ROAM](#) online.

NOTES

- MVOLT driver operates on any line voltage from 120-277V (50/60 Hz).
- Single fuse (SF) requires 120V, 277V or 347V. Double fuse (DF) requires 208V, 240V or 480V.
- Also available as a separate accessory; see Accessories information at left.
- Maximum pole wall thickness is 0.156".
- If ROAM® node required, it must be ordered and shipped as a separate line item from Acuity Brands Controls.
- Dimming driver standard. Not available with 347V, 480V, SF, DF, PER5 or PER7.
- Requires luminaire to be specified with PER option. Ordered and shipped as a separate line item.

Performance Data

Lumen Output

Lumen values are from photometric tests performed in accordance with IESNA LM-79-08. Data is considered to be representative of the configurations shown, within the tolerances allowed by Lighting Facts. Contact factory for performance data on any configurations not shown here.

LEDs	Drive Current (mA)	System Watts	Dist. Type	30K					40K					50K				
				Lumens	B	U	G	LPW	Lumens	B	U	G	LPW	Lumens	B	U	G	LPW
42C (42 LEDs)	530	75W	SR2	5,456	1	2	1	73	6,605	1	2	1	88	6,671	1	2	1	89
			SR3	5,436	1	1	1	72	6,581	1	1	2	88	6,647	1	1	2	89
			SR4	5,399	1	1	1	72	6,537	1	1	2	87	6,602	1	1	2	88
			SR5	5,748	3	1	3	77	6,959	3	1	3	83	7,029	3	1	3	94
	700	100W	SR2	6,630	1	2	1	66	8,026	2	2	2	80	8,106	2	2	2	81
			SR3	6,605	1	1	2	66	7,997	1	2	2	80	8,077	1	2	2	81
			SR4	6,561	1	1	2	66	7,943	1	2	2	79	8,022	1	2	2	80
			SR5	6,985	3	1	3	70	8,456	3	2	3	85	8,541	3	2	3	85
	1000	151W	SR2	8,165	2	2	2	54	9,885	2	2	2	65	9,983	2	2	2	66
			SR3	8,135	1	2	2	54	9,848	2	2	2	65	9,947	2	2	2	66
			SR4	8,080	2	2	2	54	9,782	2	2	2	65	9,880	2	2	2	65
			SR5	8,602	3	2	3	57	10,414	4	2	4	70	10,518	4	2	4	70

PER Table

Control	PER (3 wire)	PER5 (5 wire)			PER7 (7 wire)		
			Wire 4/Wire5		Wire 4/Wire5	Wire 6/Wire7	
Photocontrol Only (On/Off)	✓	⚠	Wired to dimming leads on driver	⚠	Wired to dimming leads on driver	Wires Capped inside fixture	
ROAM	⊘	✓	Wired to dimming leads on driver	⚠	Wired to dimming leads on driver	Wires Capped inside fixture	
ROAM with Motion (ROAM on/off only)	⊘	⚠	Wired to dimming leads on driver	⚠	Wired to dimming leads on driver	Wires Capped inside fixture	
Futureproof*	⊘	⚠	Wired to dimming leads on driver	✓	Wired to dimming leads on driver	Wires Capped inside fixture	
Futureproof* with Motion	⊘	⚠	Wired to dimming leads on driver	✓	Wired to dimming leads on driver	Wires Capped inside fixture	

✓ Recommended

⊘ Will not work

⚠ Alternate

*Futureproof means: Ability to change controls in the future.

Lumen Ambient Temperature (LAT) Multipliers

Use these factors to determine relative lumen output for average ambient temperatures from 0-40°C (32-104°F).

Ambient		Lumen Multiplier
0°C	32°F	1.06
10°C	50°F	1.04
20°C	68°F	1.01
25°C	77°F	1.00
30°C	86°F	0.99
40°C	104°F	0.96

Projected LED Lumen Maintenance


Data references the extrapolated performance projections for the **MRP LED 42C 700** platform in a **25°C ambient**, based on 10,000 hours of LED testing (tested per IESNA LM-80-08 and projected per IESNA TM-21-11).

To calculate LLF, use the lumen maintenance factor that corresponds to the desired number of operating hours below. For other lumen maintenance values, contact factory.

Operating Hours	0	25,000	50,000	100,000
Lumen Maintenance Factor	1.0	0.96	0.92	0.85



Isofootcandle plots are considered to be representative of available optical distributions.

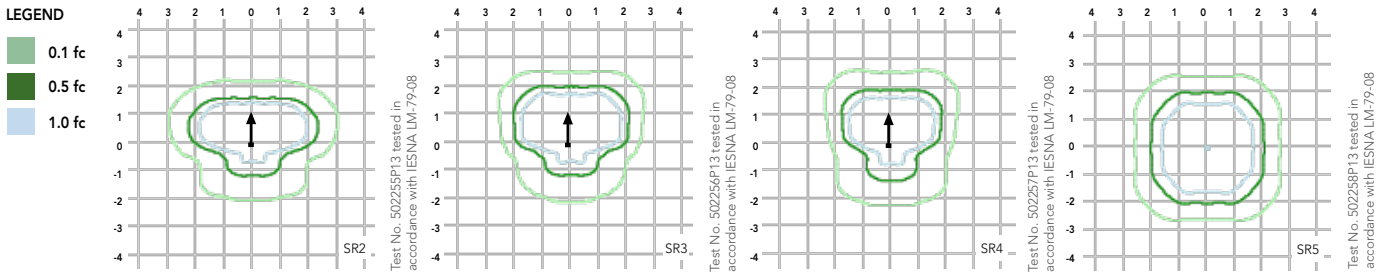

Part Night Controls

Part-Night controls are simple, energy-saving devices that allow luminaires dim during the late-night hours without the need of additional control circuits or wireless signals. With this luminaire-embedded device, the luminaires operate at full light output beginning at dusk (when turned on by the photocell or time clock), but then automatically reduce the light output (typically to 30%) for a period during the late-night hours when occupancy is lowest. The part-night device can keep the luminaire in energy-saving mode until dawn when the external photocell/timeclock switches off the luminaire, or it can be programmed for a shorter period, allowing early-morning occupants to enjoy full light output.

A luminaire with a factory-installed part-night device is easy to install as there no additional wires and no required commissioning.

Luminaires equipped with part-night devices require some dusk to dawn control in order to operate correctly. This on-at-dusk and off-at-dawn capability may be in the form of a branch circuit photocontrol or astrological timeclock, or it could be a local photocontrol in the luminaire itself. Without dusk to dawn controls, the part-night will become disabled and the luminaire will remain on at 100%.

Available configurations are as follows:

PNMTDD3	Dims mid-way through the night	Remains dimmed until dawn	Dimmed at 30%
PNMT5D3	Dims mid-way through the night	Remains dimmed for 5 hours	Dimmed at 30%
PNMT6D3	Dims mid-way through the night	Remains dimmed for 6 hours	Dimmed at 30%
PNMT7D3	Dims mid-way through the night	Remains dimmed for 7 hours	Dimmed at 30%

The part-night device uses an algorithm which averages the durations of the last three dusk-to-dawn periods (length of time the luminaire was powered) and divides it in half to determine the mid-point of the night. This accounts for seasonality and specific environmental elements that might affect the lighting in the specific locations. The luminaire may operate at full power for the first three nights in order to calibrate.

FEATURES & SPECIFICATIONS

INTENDED USE

Streets, walkways, parking lots and surrounding areas.

CONSTRUCTION

Single-piece die-cast aluminum housing with nominal wall thickness of .012". Die-cast top access doorframe has impact-resistant, tempered glass lens (3/16" thick). Doorframe is fully gasketed with one-piece tubular silicone.

FINISH

Exterior parts are protected by a zinc-infused Super Durable TGIC thermoset powder coat finish that provides superior resistance to corrosion and weathering. A tightly controlled multi-stage process ensures a minimum 3 mils thickness for a finish that can withstand extreme climate changes without cracking or peeling. Standard Super Durable colors include dark bronze, black, natural aluminum and white. Available in textured and non-textured finishes.

OPTICS

Precision acrylic refractive optics for optimum light distribution through the flat glass lens. Light engines are available in standard 3000K (70 CRI) or optional 4000K (70 CRI) or 5000K (70 CRI) configurations.

ELECTRICAL

Light engine consists of 42 high-efficacy LEDs mounted to a metal-core circuit board and aluminum heat sink, ensuring optimal thermal management and long life. Class 1 electronic driver has a power factor >90%, THD <20%, and has an expected life of 100,000 hours with <1% failure rate. Easily-serviceable surge protection device meets a minimum Category C Low for operation (per ANSI/IEEE C62.41.2).

INSTALLATION

Standard post-top mounting configuration fits into a 4" OD open pole top (round pole only). Multiple options and accessories are available for other mounting needs.

LISTINGS

CSA certified to U.S. and Canadian standards. Luminaire is IP65 rated. Rated for -40°C minimum ambient. **U.S. Patent No. D556,357.**

BUY AMERICAN

This product is assembled in the USA and meets the Buy America(n) government procurement requirements under FARS, DFARS and DOT. Please refer to www.acuitybrands.com/resources/buy-american for additional information.

WARRANTY

5-year limited warranty. Complete warranty terms located at: www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx.

Note: Actual performance may differ as a result of end-user environment and application. All values are design or typical values, measured under laboratory conditions at 25 °C. Specifications subject to change without notice.