



RoHS ISO9001



Input Voltage (V)			480/347
Max Input Circuit (A)			0.12/0.16
Max Output Circuit (A)			0.21
Max. Load(VA)			50
Output Voltage (V)			240
Full Load	EFF. (%)		90/92
	THD (%)		6.2/6.7
	Power Factor		0.976/0.974
UL Class B 130 Temp. Code			A
Dimension (inches/mm)	Basic dimensions	A*	1.77±0.04/45±1
		B(Max)	2.76/70
		W	1.65±0.04/42±1
		H	1.34±0.04/34±1
	Installation dimensions	M1	1.28/32.6
		M2	2.50±0.04/63.6±2
		M3	0.57/14.4
		M4	2.72±0.04/69±2
		L	2.95±0.04/75±2
Max Net Weight (lbs)			1.04
Max Net Weight + LW (lbs)			1.07
Lead Length (inches)			8±0.5

A* not covered the thickness of the two holders

*Lead Type: (AVLV2, AVLV8), Type 3135, No. 18 AWG (or Equivalent), rated 200°C, 600 V. Strip 10mm Tin Plated.
347V lead wire is pre-insulated.

Product Standards: UL 5085-1, UL 5085-2
UL CCN: XPTQ2, XPTQ8

Model No.	MTM00506224C-LW
Product Type	Step-down Transformer
Rating (VA)	50
Vin Vout	480/347VAC 240VAC
Frequency	60 Hz
Status	Production

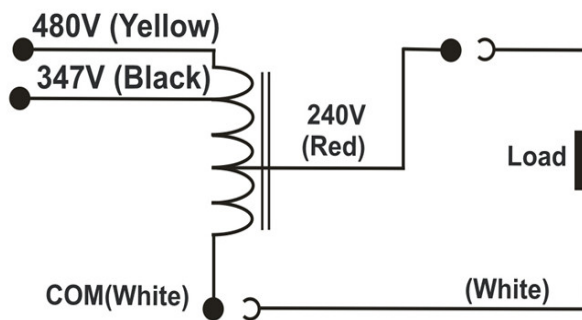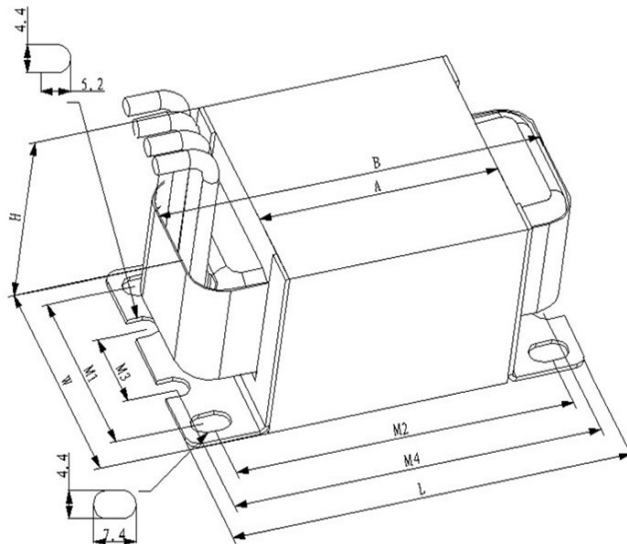

Document No.:	PS_MTM_VA0050_62-24_C_M03
Date:	2017-02-08 (yyyy-mm-dd)