





## HALOGEN 2 PIN PREFOCUS LAMPHOLDERS

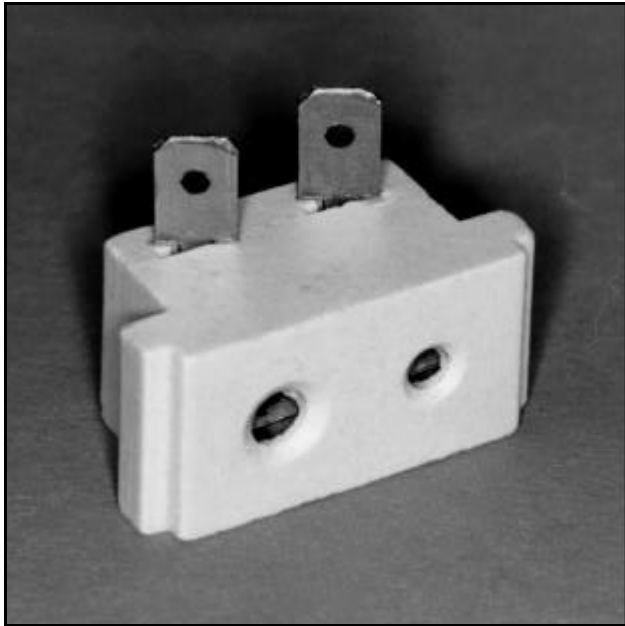


### QEW-O

Note: For 100 watts and greater, ample convection or forced air flow is required to prevent socket damage. Lamp Pins should not exceed 225°C to prevent lamp failure. Consult factory for assistance.

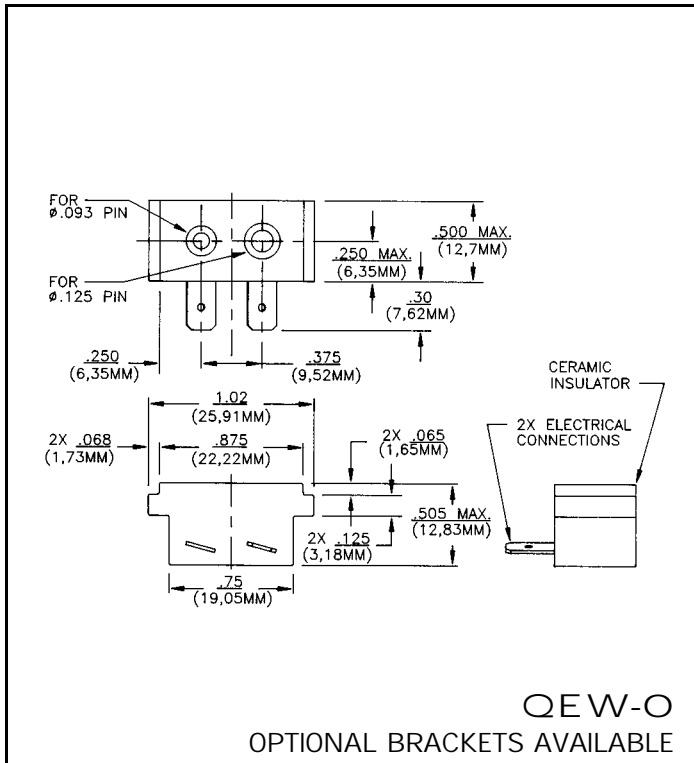

## LAMP BASES: GY-9.5, GZ-9.5

2-PIN PREFOCUS  
GY-9.5 & GZ-9.5

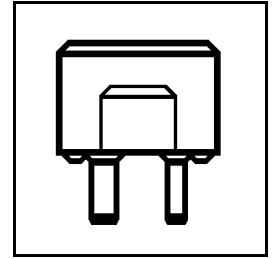

## QEW-O, 1

The QEW Lampholder is designed to the ANSI Codes and International Standards. Lampholders are UL and CSA recognized.

### Features:

- Ratings:** Volts 300  
Amps 10  
Watts 1000  
Temp 300°C (on socket parts)
- Terminals:** Push Lock Terminal  
.187" x .020"  
Welded Leads Optional
- Construction:** Steatite Body  
Nickel Contacts

