


**HALOGEN MEDIUM 2 PIN
G-9.5 LAMPHOLDER**

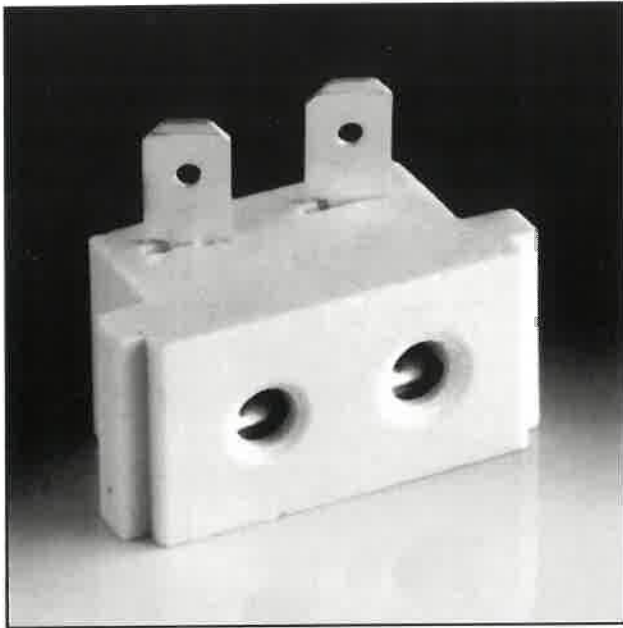


QEW-2

Note: For 100 watts and greater, ample convection or forced air flow is required to prevent socket damage. Lamp Pins should not exceed 225°C to prevent lamp failure. Consult factory for assistance.

**LAMP BASE:
G-9.5**

MEDIUM 2-PIN
G-9.5



QEW-2

The QEW-2 Lampholder is designed to the ANSI Codes and International Standards. Lampholders are UL and CSA recognized.

Features:

- Ratings:** Volts 300
Amps 10
Watts 1000
Temp 300°C (on socket parts)
- Terminals:** Push Lock Terminal
.187 x .020 Inches
Welded Leads Optional
- Construction:** Steatite Body
Nickel Contacts

