



Peak Wavelength	~455nm(CW), ~635nm(WW), ~630nm(Red), ~525nm(Green), ~470nm(Blue),
CRI / R9	90+/60+
Lumens per foot	211lm/ft
LEDs per foot	88 LEDs/ft
Cut Lengths	2.5”(63.5mm)
Watts per foot	4.4W/ft
Input Voltage	24V DC
Luminous Efficiency	48lm/W
Tape Width	0.5”(12mm)



RoHS



FEATURES

- RGB tunable white LED tape for creating millions of amazing color effects
- Maximum run length 10 meters / 5m per reel
- LM80 Compliant 3535 & 2216 SMD LEDs
- Title 24 Compliant
- Uniform, linear light output
- Consistent color, 1 bin sorted
- High efficacy
- UL Listed
- Perfect for dynamic, colorful accent lighting and vibrant cool or warm white illumination
- 3oz. copper
- IP68 silicone injected tube
- LM-80, LM-79 compliant LEDs
- 7 Year warranty

MODEL SPECIFICATIONS


Model Number	Input Voltage	IP	Lm/m*	W/m*	lm/W*	Reel Length
QLUXF50001440LED35RGBTW-68	24V DC	IP68	691 lm/m	23W/m	48lm/W	5m

Dominant Wavelength Range		
Red	Green	Blue
620-630nm	520-535nm	470-475nm


**Hardware included, comes with mounting clips and waterproof caps.*

SPECTRORADIOMETRIC REPORT


6500K

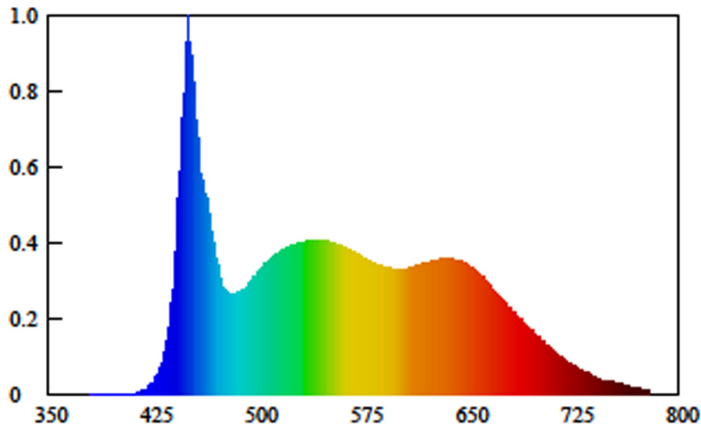


4000K

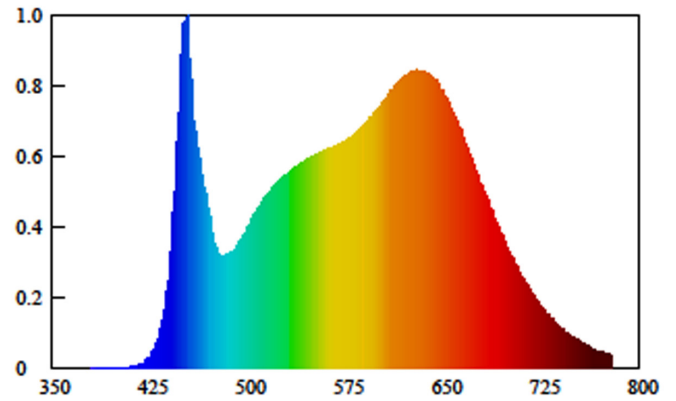


2100K

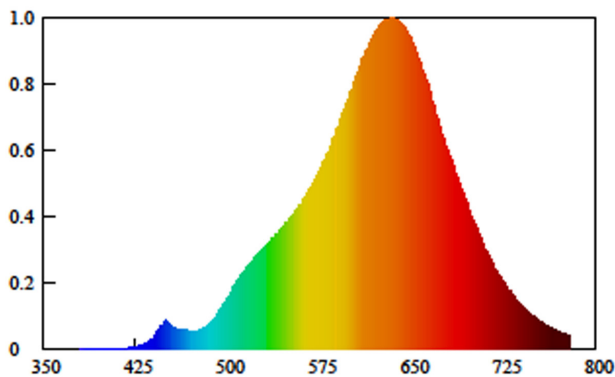


RED

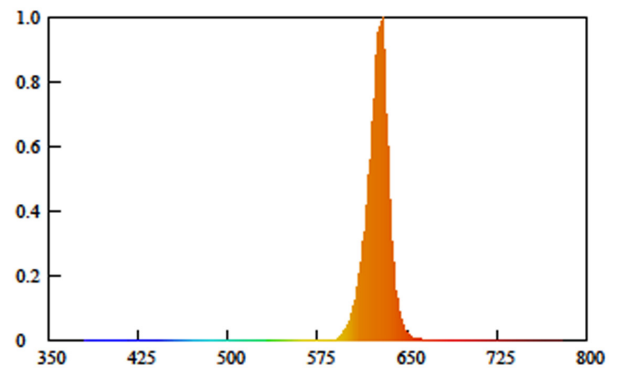

GREEN

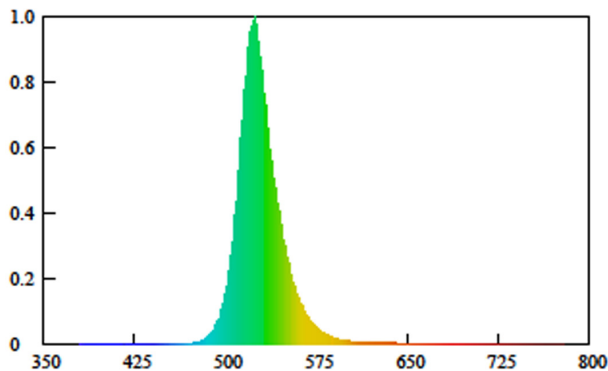


BLUE

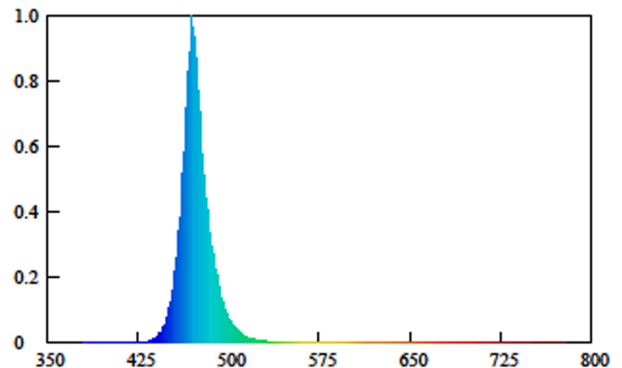


CRI CHART


6500K

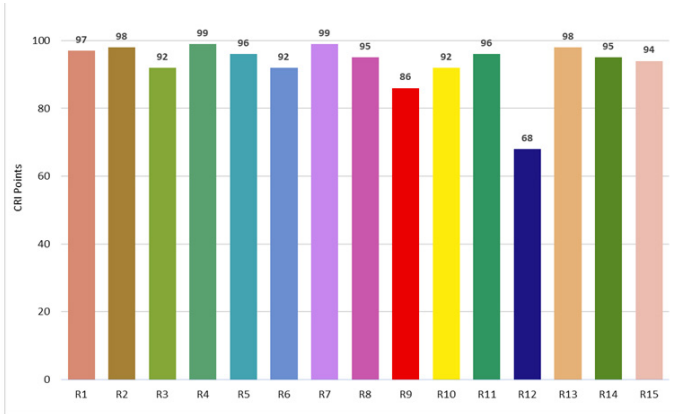

2100K

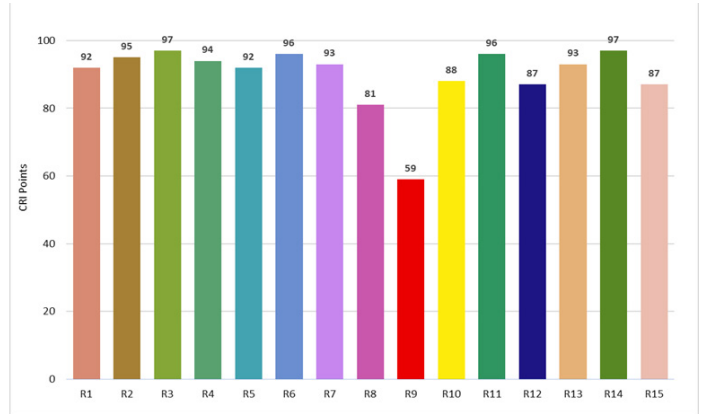

6500K

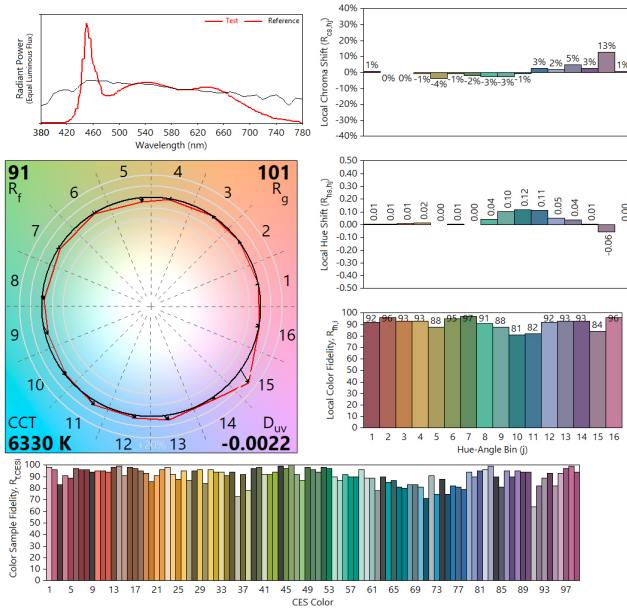

2100K

