
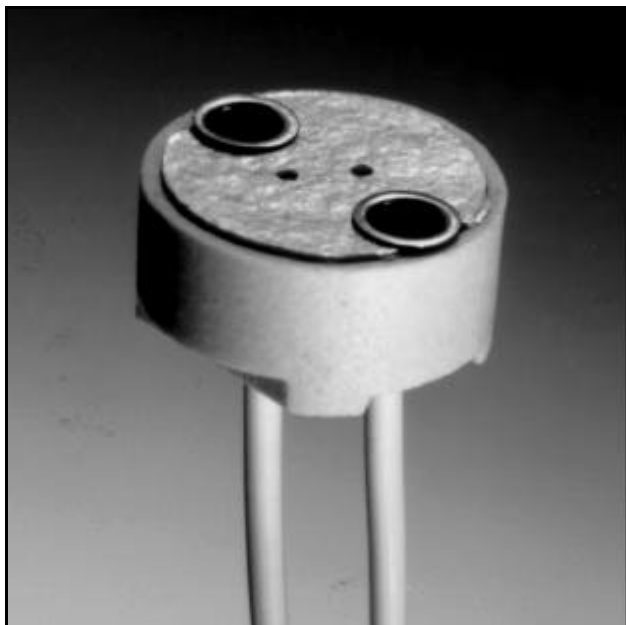


**LAMP BASES:
G-4, GZ-4, GX-4**

MINIATURE GLASS 2-PIN
(ROUND PINS)
.028" / .040" DIA



QRX-4

The QRX-4 Low Voltage Lampholder is designed to the ANSI Codes and International Standards. Lampholders are UL and CSA recognized.

Features:

Ratings: Volts 125
Amps 10
Watts 100
Temp 250°C (on socket parts)

Lead Wire: 200°C Silicon Glass SF1
#18 ga. (Standard)
250°C PTFE (Special)

Construction: Steatite Body
Nickel Contacts
Stainless Steel Contact Spring
Mica Cover

QRX-4

Note: For 100 watts and greater, ample convection or forced air flow is required to prevent socket damage. Lamp Pins should not exceed 225°C to prevent lamp failure. Consult factory for assistance.

