buhl ELECTRIC

LAMP BASES:
G-4, G-5.3, G-6.35



2-PIN (ROUND PINS)
G-4, GX-4, GZ-4
(.028"/.040" DIAM. PINS)



2-PIN (ROUND PINS)
GX-5.3, G-5.3
(.040" DIAM. PINS)



GLASS 2-PIN (ROUND PINS)
GY-6.35 (.050" DIAM. PINS)
GZ-6.35 (REFLECTOR QUARTZINE LAMPS)

LOW VOLTAGE HALOGEN LAMPHOLDER

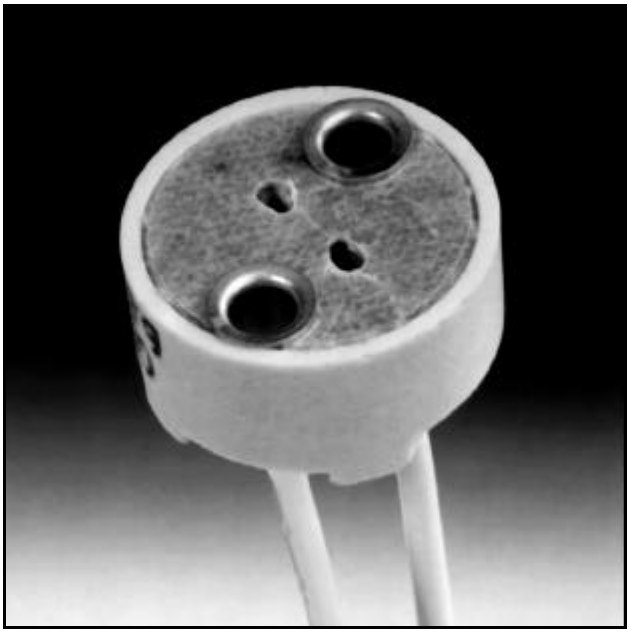

QRX-6.35CT

Note: For 100 watts and greater, ample convection or forced air flow is required to prevent socket damage. Lamp Pins should not exceed 225°C to prevent lamp failure. Consult factory for assistance.

QRX-6.35CT

The QRX Low Voltage Lampholder is designed to the ANSI Codes and International Standards. Lampholders are UL and CSA recognized.

QRX-6.35CT Combination Lampholder fits G-4, G-5.3 and G-6.35 lamp bases.

Features:

Ratings:
Volts 125
Amps 12
Watts 400
Temp 250°C (on socket parts)

Lead Wire: #18 ga.
200°C Silicon Glass SF1 (Standard)
250°C PTFE (Special)

Construction:
Steatite Body
Nickel Contacts
Stainless Steel Contact Spring
Mica Cover

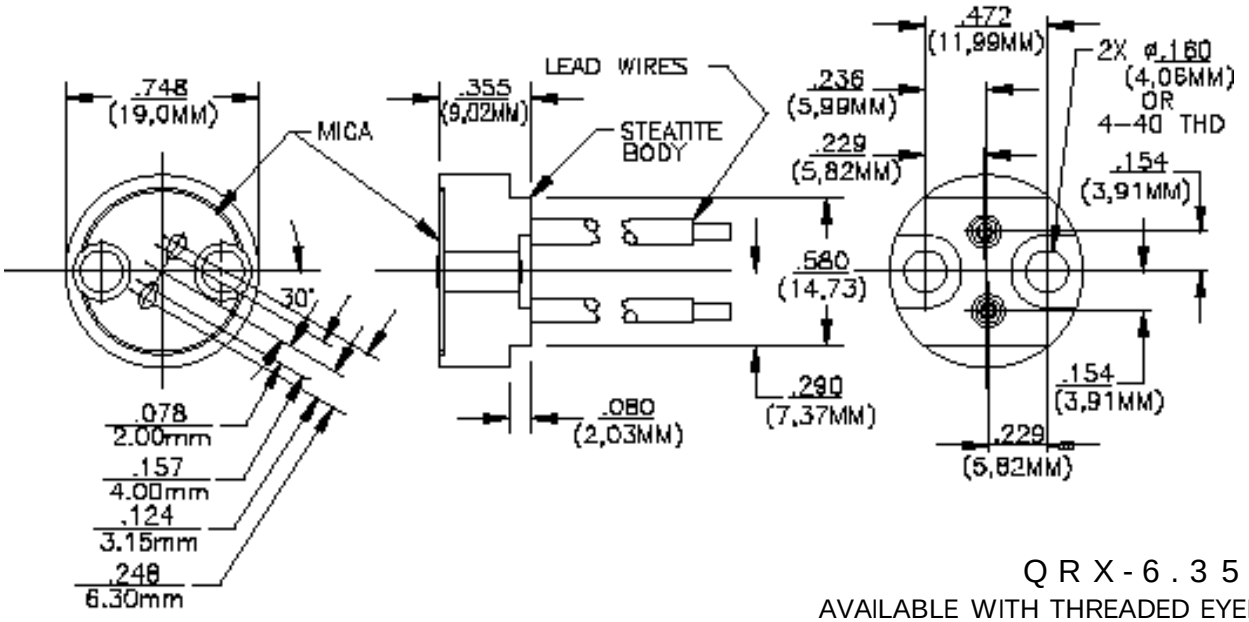

QRX-6.35CT
AVAILABLE WITH THREADED EYELETS