



SOLAR
LIGHTS



HYBRID
365



OFF-GRID

FREE TO SHINE

AREA LIGHTS




PART #	COMPARES TO	WATTAGE	LUMENS	COLOR	EPA	DIMENSIONS	LISTINGS
HYBRID SOLAR AREA LIGHT							
SL-SAL-HYB-30W-40K-SF-BK-G2	250W	30W	5900	4000K	4.45	11.2" x 3.5" x 16.3" (FIXTURE) 15.9" x 31.5" (SOLAR PANEL)	
SL-SAL-HYB-50W-40K-SF-BK-G2	400W	50W	9800	4000K	6.1	11.2" x 7.0" x 16.3" (FIXTURE) 31.8" x 31.5" (SOLAR PANEL)	

OFF-GRID SOLAR AREA LIGHT							
RP-SAL-8W-50K-SF-GY-G2	70W	8W	1600	5000K	1.824	20.0" x 12.0" x 3.0"	
RP-SAL-8W-50K-SF-DB-G2							
RP-SAL-30W-50K-SF-GY-G2	250W	30W	6000	5000K	4.788	36.0" x 16.8" x 3.8"	
RP-SAL-30W-50K-SF-DB-G2							
RP-SAL-8W-AMB-SF-GY-G2	70W	8W	284	580nm AMBER	1.824	20.0" x 12.0" x 3.0"	
RP-SAL-30W-AMB-SF-GY-G2	250W	30W	806	580nm AMBER	4.788	36.0" x 16.8" x 3.8"	
SL-SAL-OG-30W-50K-SF-BK-G2	250W	30W	5900	5000K	4.45	11.2" x 3.5" x 16.3" (FIXTURE) 15.9" x 31.5" (SOLAR PANEL)	
SL-SAL-OG-50W-50K-SF-BK-G2	400W	50W	9800	5000K	6.1	11.2" x 7.0" x 16.3" (FIXTURE) 31.8" x 31.5" (SOLAR PANEL)	

SOLAR AREA LIGHT ACCESSORIES

FOR USE W/ SL-SAL OFF-GRID + HYBRID MODELS		FOR USE W/ RP-SAL OFF-GRID MODELS	
PART #	DESCRIPTION	PART #	DESCRIPTION
SL-SAL-BKT-RP-BK-G1	ROUND POLE BRACKET	RP-SAL-BKT-8W-RP-G1	ROUND POLE BRACKET
SL-SAL-BKT-SP-BK-G1	SQUARE POLE BRACKET	RP-SAL-BKT-8W-SP-G1	SQUARE POLE BRACKET
SL-SAL-BKT-ST-3-BK-G1	TENON ADAPTER FOR 3" SQUARE POLE	RP-SAL-BKT-8W-TN-G1	TRUNNION BRACKET FOR 8W
SL-SAL-BKT-RT-3-BK-G1	TENON ADAPTER FOR 3" ROUND POLE	RP-SAL-BKT-30W-RP-G1	ROUND POLE BRACKET FOR 30W
SL-SAL-BKT-WM-BK-G1	WALL MOUNT BRACKET	RP-SAL-BKT-30W-SP-G1	SQUARE POLE BRACKET FOR 30W
ALL MODELS INCLUDE A STANDARD SLIP FITTER MOUNTING BRACKET.		RP-SAL-BKT-30W-TN-G1	TRUNNION BRACKET FOR 30W
		RP-SAL-REMOTE-G1*	REMOTE CONTROL
		RP-SAL-BIRDGUARD	DETERS BIRDS FROM PERCHING ON FIXTURE

* INCLUDED STANDARD W/ EACH FIXTURE ORDERED.

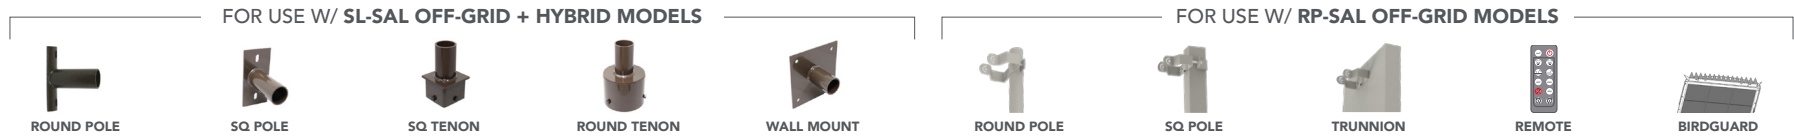

EXCLUSIVE LONG-LASTING BATTERY TURTLE FRIENDLY

SIX MODELS TO CHOOSE FROM WITH HID EQUIVALENCE FROM 70W TO 400W. The off-grid fixtures are powered entirely by the sun, requiring no trenching or wiring – free to shine. Hybrid models are powered by the sun and backed up by line-voltage for guaranteed light every night.

HYBRID 365
POWERED BY THE SUN &
BACKED-UP BY LINE-VOLTAGE

OFF-GRID
100% POWERED BY THE SUN

SL-SAL-30W →

↑ SL-SAL-50W

RP-SAL-50/30W ↑

OPERATING MODES | TIMER | MOTION SENSING

5 YEAR WARRANTY

CERTIFIED BATTERY

UN 38.3

RP-SAL

BATTERY CHARGING TIME

7 HRS

RP-SAL

6-10 HRS

SL-SAL

BATTERY CHARGING TEMP

32°F TO 149°F

RP-SAL

-4°F TO 140°F

SL-SAL

UP TO 50 HRS

BATTERY LIFE

REPLACEABLE BATTERY

REMOTE CONTROL

FIXTURE OPERATING TEMP

-4°F TO 122°F

RP-SAL

-40°F TO 140°F

SL-SAL

MOTION SENSING

100,000hrs RATED LIFE