

RSW240V120

Ballast Type: Electronic
Input Voltage: 120Vac ±10%
Input Frequency: 50/60Hz

Starting Method: Preheat Rapid Start
Lamp Connection: Parallel

Unit Color: White
Unit Weight: 0.90 lbs.

ELECTRICAL SPECIFICATIONS:

Line Voltage (V)	No. of Lamps	Lamp Type	Typical Lamp Watts (W)	Lamp Voltage (V)	Lamp Current (mA)	Input Current (A)	Input Power (W)	Power Factor	Input Current THD (%)	Lamp Current Crest Factor	Electrical Efficiency
108	2/1	F40T12	40	107	317	1.12	72	>0.50	70	1.62	0.91
120				102	409	1.23	88		70	1.65	0.91
132				97	508	1.33	105		72	1.58	0.89
108	2/1	Actinic BL TL 40W	39	100	345	1.23	75	>0.50	109	1.44	0.91
120				95	428	1.29	86		115	1.46	0.91
132				91	490	1.34	97		120	1.49	0.90
108	2/1	F36T8BL	36	104	326	1.11	71	>0.50	70	1.67	0.90
120				95	434	1.21	86		71	1.70	0.90
132				89	535	1.31	103		74	1.59	0.88
108	2/1	G36T8/OF	36	98	344	1.27	73	>0.50	110	1.47	0.90
120				90	429	1.26	84		116	1.49	0.90
132				86	490	1.30	94		122	1.52	0.88
108	2/1	GFT36DL/2G11/SE/OF	36	97	348	1.13	70	>0.50	99	1.54	0.92
120				86	420	1.18	79		102	1.57	0.90
132				81	520	1.23	92		108	1.54	0.91
108	2/1	PLL36W/TUV	36	97	348	1.13	70	>0.50	99	1.54	0.92
120				86	420	1.18	79		102	1.57	0.90
132				81	520	1.23	92		108	1.54	0.91
108	2/1	TUV 36W	36	101	330	1.47	70	>0.50	100	1.55	0.92
120				97	394	1.21	82		103	1.58	0.92
132				85	497	1.24	92		111	1.59	0.91
108	2/1	TUV PL-L 36W/4P	36	97	348	1.13	70	>0.50	99	1.54	0.92
120				86	420	1.18	79		102	1.57	0.90
132				81	520	1.23	92		108	1.54	0.91
108	2/1	23392 Osram HNS L 36 W 2G11	36	97	348	1.13	70	>0.50	99	1.54	0.92
120				86	420	1.18	79		102	1.57	0.90
132				81	520	1.23	92		108	1.54	0.91
108	2/1	59985 Osram HNS 36W G13	36	101	330	1.47	70	>0.50	100	1.55	0.92
120				97	394	1.21	82		103	1.58	0.92
132				85	497	1.24	92		111	1.59	0.91

PERFORMANCE:

- Encased & Potted
- Sound Rated A
- Internal Surge Protection
- Meets FCC Part 18 (Class B) for EMI and RFI Consumer Limits
- Meets ANSI Standard C62.41 for Transient Protection
- Meets ANSI Standard C82.11 for Ballast Requirements

APPLICATION:

- Maximum Case Temperature 167°F/75°C
- Maximum Ambient Temperature 104°F/50°C
- Minimum Starting Temperature 0°F/-18°C
- Lamp Starts >10,000 Starts
- Remote Mounting 18 ft. Max. Lead Length, 18AWG

SAFETY/STANDARDS:

- UL/935 Listed (Class P, Type 1 Outdoor)
- cUL (CSA/C22.2 Certified)
- No PCB's, Type HL, Type CC
- Inherent Thermal Protection
- RoHS Compliant

WARRANTY:

Robertson Worldwide warrants to the purchaser that this product will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal condition of use. Specifications subject to change without notice.
For more information on Robertson Worldwide products, visit www.RobertsonLighting.com


RSW240V120

Ballast Type: Electronic
 Input Voltage: 120Vac $\pm$ 10%
 Input Frequency: 50/60Hz

Starting Method: Preheat Rapid Start
 Lamp Connection: Parallel


Unit Color: White
 Unit Weight: 0.90 lbs.

CASE STYLE: CS-9W4

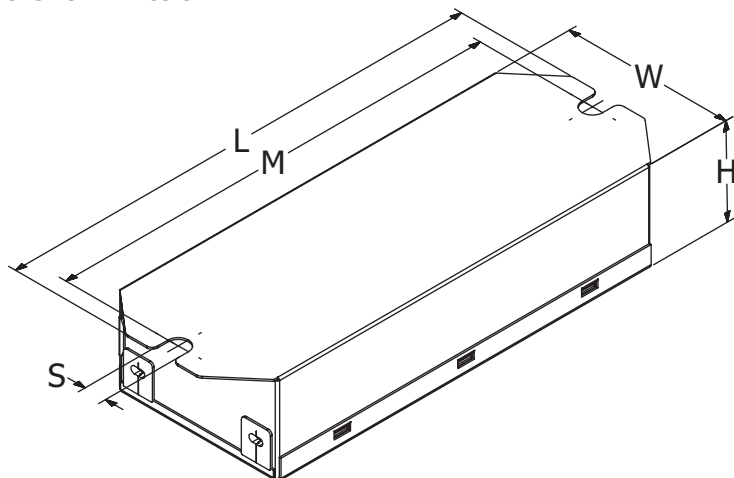


L	W	H	M	S
6-15/32	2-9/32	1-1/4	6	5/16
6.46	2.28	1.26	6.00	0.30
16.41cm	5.80cm	3.20cm	15.24cm	0.75cm

HOT SPOT LOCATION: (Top Label Side of Ballast)

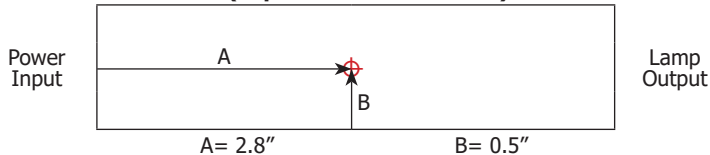

WIRING DIAGRAM:

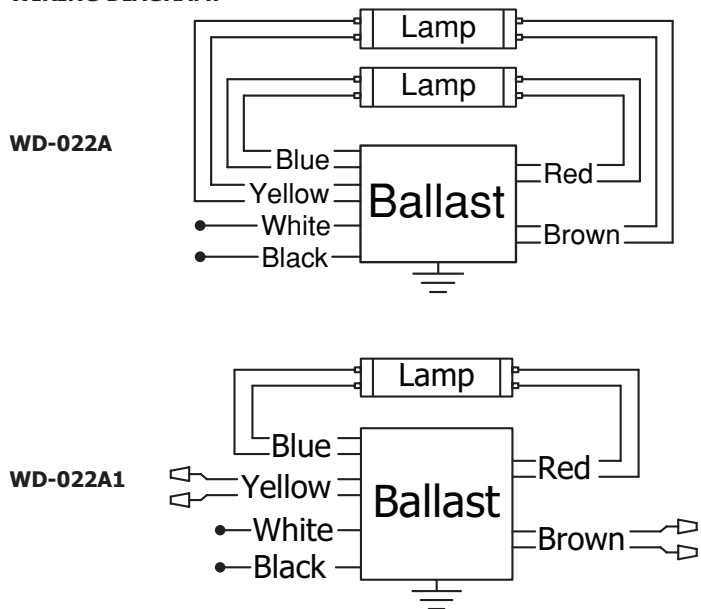

For 1 Lamp Application Cap Yellow and Brown Leads, Insulate to 600 Volts

- Black: 20"
- White: 20"
- Blue: (2) 37"
- Yellow: (2) 37"
- Tolerance: +1.00, -0.50"
- Strip: 0.375" $\pm$ 0.060"
- Red: (2) 26"
- Brown: (2) 26"
- Tolerance: +1.00, -0.50"
- Strip: 0.375" $\pm$ 0.060"

WARRANTY:

Robertson Worldwide warrants to the purchaser that this product will be free from defects in material or workmanship for a period of 2 years from date of manufacture when properly installed and under normal condition of use. Specifications subject to change without notice.

For more information on Robertson Worldwide products, visit www.RobertsonLighting.com