



## T-4½ SINGLE, DOUBLE CONTACT BAYONET BASE & 6S6 CANDELABRA SCREW BASE

**ORDERING INFORMATION:**  $\frac{SSB}{(A)} - \frac{32X}{(B)} \frac{X}{(C)} - \frac{X}{(D)}$

**(A) MODEL**

SSB  
SSBF (FLAT-TOP LEDs) AVAILABLE

**(B) NUMBER OF LEDs**

320= 12 CLUSTER (SINGLE CONTACT BASE)  
321= 12 CLUSTER (DOUBLE CONTACT BASE)  
322= 12 CLUSTER (CANDELABRA SCREW BASE)

**(C) STANDARD DC & AC OPERATING VOLTAGES**

1= 24V  
2= 28V  
3= 48V  
4= 120V

ALL LAMPS ARE DUAL POLARITY

**NOTE:** PLEASE CALL FACTORY FOR OTHER VOLTAGES.

**(D) LED EMITTING COLOR & WAVELENGTH**


01= ULTRA RED (660nm) **OBSOLETE**  
02= ULTRA HI EFF. RED (623-630nm)  
03= ULTRA ORANGE (612-620nm)  
\*S4= ULTRA YELLOW (590-595nm)  
\*6NW= ULTRA PURE GREEN (520-530nm)  
\*8NW= FLUORESCENT "WHITE" (NO nm VALUE)\LUE)  
\*10NW= ULTRA BLUE (465-475nm)  
\*12NW= SOFT WHITE (NO nm VALUE)  
**\*MAX. CONTINUOUS CURRENT 10mA.**

ALL LED LENSES ARE WATER CLEAR


HOUSING MAT'L. UL94VO APPROVED

SPECIFICATIONS ARE SUBJECT TO CHANGE WITHOUT NOTICE

**MODEL: SSB-320X-0X**

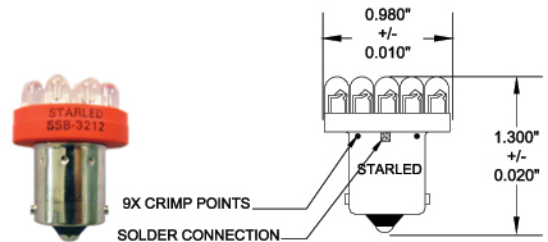

**MODEL: SSB-321X-0X**

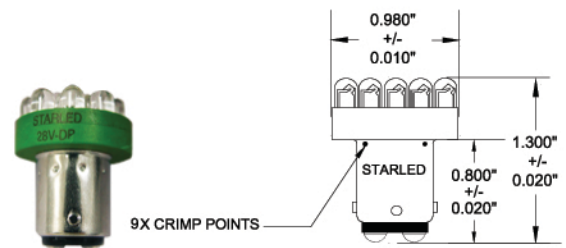

**MODEL: SSB-322X-0X**

