

## FEATURES & SPECIFICATIONS

**INTENDED USE** —The T Series LED combines digital lighting and control technologies with a high-performance optical system to deliver general ambient lighting for many applications such as schools, offices and hospitals.

High-efficacy light engine delivers long life and excellent color, ensuring a superior quality lighting installation that is highly efficient and sustainable. **Certain airborne contaminants can diminish integrity of acrylic.** [Click here for Acrylic-Polycarbonate Compatibility table for suitable uses.](#)

**CONSTRUCTION** — Housing formed from cold-rolled steel. Polyester powder-paint after fabrication option available.

Smooth hemmed sides and smooth inward-formed end flanges, for easy handling.

Standard extruded aluminum door frame has superior structural integrity with premium appearance and mitered corners. Powder-painted rotary cam latches provide easy, secure door closure. Integral T-bar clips are standard. Acrylic shielding material is 100% UV stabilized.

**OPTICS** — Standard pattern #19 lens, 0.156" thick with highly transmissive overlay, is standard for superior brightness control. Overlay is 0.040" thick. Other lenses are available.

**ELECTRICAL** — Long-life LEDs, coupled with high-efficiency drivers, provide superior level and quality of illumination for extended service life. 90% LED lumen maintenance at 60,000 hours (L90/60,000).

eldoLED driver options deliver choice of dimming range, and choices for control, while assuring flicker-free, low-current inrush, 89% efficiency and low EMI. Optional nLight® embedded controls continuously monitor system performance, allow for constant lumen management/compensation function, facilitate simple "plug-and-play" network and controls upgrading via Cat-5 cable.

Driver disconnect is provided where required to comply with U.S. and Canadian codes.

**INSTALLATION** — Drivers and internal components are accessible from floor. LED boards include plug-in connectors for easy replacement or servicing. Suitable for direct insulation contact. Suitable for damp location.

**LISTINGS** — CSA certified to U.S. and Canadian standards. IC rated.

DesignLights Consortium® (DLC) qualified product. Not all versions of this product may be DLC qualified. Please check the DLC Qualified Products List at [www.designlights.org/QPL](http://www.designlights.org/QPL) to confirm which versions are qualified.

**BUY AMERICAN** — Product with the BAA option is assembled in the USA and meets the Buy America(n) government procurement requirements under FAR, DFARS and DOT.

Please refer to [www.acuitybrands.com/buy-american](http://www.acuitybrands.com/buy-american) for additional information.

**WARRANTY** — 5-year limited warranty. Complete warranty terms located at: [www.acuitybrands.com/support/warranty/terms-and-conditions](http://www.acuitybrands.com/support/warranty/terms-and-conditions)

**Note:** Actual performance may differ as a result of end-user environment and application.

All values are design or typical values, measured under laboratory conditions at 25 °C.

Specifications subject to change without notice.

Catalog Number
Notes
Type

T SERIES LED

TL

1' x 4' LED




### Specifications

Length: 48 (121.9)

Width: 12 (30.5)

Depth: 4-1/2 (11.4)



All dimensions are inches (centimeters) unless otherwise noted.

### CSA+ Capable Luminaire

This item is an A+ capable luminaire, which has been designed and tested to provide consistent color appearance and out-of-the-box control compatibility with simple commissioning.

- All configurations of this luminaire meet the Acuity Brands' specification for chromatic consistency
- This luminaire is part of an A+ Certified solution for nLight® control networks when ordered with drivers marked by a shaded background\*
- This luminaire is part of an A+ Certified solution for nLight control networks, providing advanced control functionality at the luminaire level, when selection includes driver and control options marked by a shaded background\*

To learn more about A+, visit [www.acuitybrands.com/aplus](http://www.acuitybrands.com/aplus).

\*See ordering tree for details

# TL Recessed LED Lighting 1'x4'



A+ Capable options indicated by this color background.

## ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

**Example:** TL4 40L FW A12 EZ1 LP835 N80

TL4		Lumens <sup>1</sup>		Door		Lens		Voltage	
Series	TL4 Recessed LED 1x4	20L	2000 lumens	FW	Flush aluminum, white	A12	#12 pattern acrylic	(blank)	MVOLT (120-277V)
		30L	3000 lumens	RW	Regressed aluminum, white	A19	#19 pattern acrylic, 0.156" thick	347	347V <sup>2</sup>
		40L	4000 lumens			MWS	Matte white .040" thick		
		48L	4800 lumens			MPL	Micro prism		
		60L	6000 lumens			SWL	Satin white		

Driver		Color temperature		Control <sup>5</sup>		Options	
EZ1	eldoLED dims to 1% (0-10 volt dimming)	LP830	3000 K	(blank)	No controls	EL7L	700 nominal lumen battery pack (Noncompliant with CA T20) <sup>6</sup>
EZB	eldoLED dims to 0.1% (0-10 volt dimming)	LP835	3500 K	N80	nLight with 80% (L80) lumen management	EL14L	1400 nominal lumen battery pack (Noncompliant with CA T20) <sup>6</sup>
GZ1	Dims to 1% (0-10V dimming) <sup>3</sup>	LP840	4000 K	N80EMG	nLight with 80% (L80) lumen management for use with generator supply EM power	E10WLCP	EM Self-Diagnostic battery pack, 10W Constant Power, Certified in CA Title 20 MAEDBS <sup>6</sup>
GZ10	Dims to 10% (0-10V dimming) <sup>3</sup>	LP850	5000 K	N100	nLight without lumen management	CP	Chicago plenum <sup>4</sup>
EDB	eldoLED DALI <sup>4</sup>			N100EMG	nLight without lumen management for use with generator supply EM power	BAA	Buy America(n) Act Compliant
SLD	Step-level dimming <sup>4</sup>					PAF	Paint after fabrication

Accessories: Order as separate catalog number.	
DGA14	Drywall grid adapter for 1x4 recessed fixture.

### Notes

- 1 Approximate lumen output.
- 2 Not available with EL7L or EL14L battery packs or SLD driver.
- 3 GZ1, GZ10 drivers not available with any Controls options.
- 4 Not available with N80, N80EMG, N100, or N100EMG. Not available with PWS1836, PWS1846, PWS1856LV, or PWS1846 PWSLV.
- 5 Cannot row mount when ordered with nLight options
- 6 Not available for 48L or 60L options.

Performance Data				
Lumen	Package	Lumens	Input Watts	LPW
20L	LP830	2,212.5	21	105.4
20L	LP835	2,259.9	21	107.6
20L	LP840	2,275.7	21	108.4
20L	LP850	2,354.8	21	112.1
30L	LP830	3,143.5	30	104.8
30L	LP835	3,211.3	30	107.0
30L	LP840	3,233.9	30	107.8
30L	LP850	3,346.9	30	111.6
40L	LP830	3,991.0	39	102.3
40L	LP835	4,076.9	39	104.5
40L	LP840	4,106.3	39	105.3
40L	LP850	4,248.6	39	108.9
48L	LP830	4,793.3	47	102.0
48L	LP835	4,897.2	47	104.2
48L	LP840	4,931.1	47	104.9
48L	LP850	5,105.2	47	108.6
60L	LP830	5,426.1	55	98.7
60L	LP835	5,541.3	55	100.8
60L	LP840	5,582.0	55	101.5
60L	LP850	5,776.3	55	105.0

Performance based on standard #12 pattern acrylic lens.

### How to Estimate Delivered Lumens in Emergency Mode

Use the formula below to estimate the delivered lumens in emergency mode

$$\text{Delivered Lumens} = 1.25 \times P \times \text{LPW}$$


P = Output power of emergency driver. P = 10W for E10WLCP option.

LPW = Lumen per watt rating of the luminaire. LPW information available in Performance Data section.

# TL Recessed LED Lighting 1'x4'

## PHOTOMETRICS

TL4 40L FW A12 EZ1 LP840, 4106.3 delivered lumens, test no. LTL26929P10, tested in accordance to IESNA LM-79.

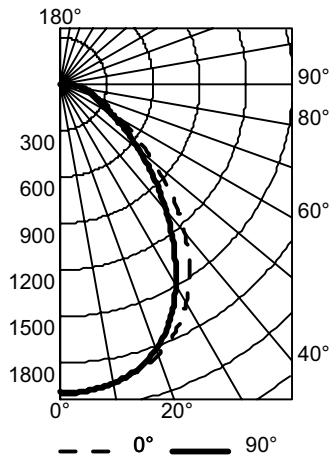

CP Summary		
0°	90	
0°	1988	1988
5°	1982	1988
15°	1917	1908
25°	1759	1677
35°	1452	1277
45°	1018	854
55°	601	507
65°	342	291
75°	187	194
85°	82	87
90°	0	0

Coefficients of Utilization											
RCP	pf	20%									
		pc	80%			70%			50%		
			pw	70%	50%	30%	50%	30%	10%	50%	30%
0	0	119	119	119	116	116	116	111	111	111	
1	1	110	106	102	104	100	97	99	96	94	
2	2	101	94	88	92	87	82	89	84	80	
3	3	94	84	77	83	76	70	80	74	69	
4	4	87	76	68	74	67	61	72	66	61	
5	5	80	69	60	67	60	54	65	59	54	
6	6	75	62	54	61	54	48	60	53	48	
7	7	70	57	49	56	49	43	55	48	43	
8	8	65	53	45	52	44	39	51	44	39	
9	9	61	49	41	48	41	36	47	40	35	
10	10	57	45	38	45	37	33	44	37	32	

Zonal Lumen Summary			
Zone	Lumens	% Lamp	% Fixture
0° - 30°	1512	36.8	36.8
0° - 40°	2360	57.5	57.5
0° - 60°	3559	86.7	86.7
0° - 90°	4106	100.0	100.0
90° - 120°	0	0.0	0.0
90° - 130°	0	0.0	0.0
90° - 150°	0	0.0	0.0
90° - 180°	0	0.0	0.0
0° - 180°	4106	100.0	100.0

## Constant Lumen Management

Enabled by the embedded nLight control, the T Series LED actively tracks its run-time and manages its light source such that constant lumen output is maintained over the system life. Referred to as lumen management, this feature eliminates the energy waste created by the traditional practice of over-lighting.

