


REVISIONS			
REV	DESCRIPTION	DATE	APPROVED

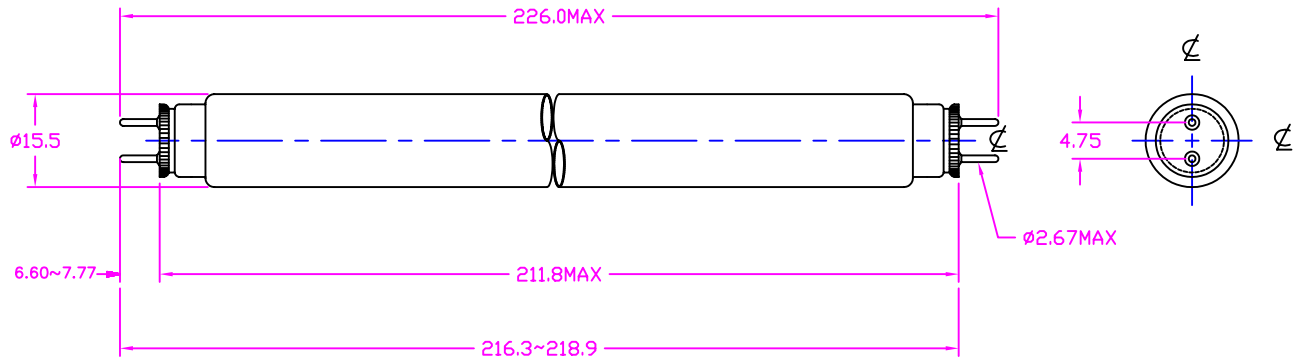

- NOTES:
1. ALL DIMENSIONS ARE IN MM.
 2. SEAL TEMP: SHOULD BE MAINTAINED BELOW 350°C
 3. THE DIMENSIONS AND SPECIFICATIONS OF PRODUCT LISTED IN THIS SHEET ARE SUBJECT TO CHANGE WITHOUT NOTICE FOR IMPROVEMENT.

CHARACTERISTICS	
RATED VOLTAGE	100 V
STARTING VOLTAGE	94MAX
CURRENT	0.147 A
WATTAGE	5.9 W
UV ENERGY	0.4 W
CAP	G5
COLOUR	BLACK LIGHT
AVERAGE LIFE	1500 HRS

ITEM	QTY	DESCRIPTION	CODE IDENT	PART NUMBER	REMARKS
LIST OF MATERIALS					
UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES		CONTRACT NO.		USHIO AMERICA, INC. 5440 Cerritos Avenue Cypress, CA 90630	
DECIMALS .X ± - .XX ± .XXX ±		APPROVALS			
ANGLES ±		DATE		TITLE	
DRILLED HOLES PER AND 10387 REMOVE BURRS AND SHARP EDGES ALL DIMENSIONS AFTER PLATING		DRAWN			
MATERIAL		CHKD		UFL-F6T5BL FLUORESCENT LAMP	
COMPOSITE		ENGR			
FINISH		MFG		SIZE	
		QUAL			
		DSGN ACTVY		CODE IDENT NO.	
		GOVT ACTVY		DWG NO.	
				3000110	
				SCALE	
				NONE	
				WEIGHT	
				SHEET	
				1 OF 1	