

# METAL HALIDE LAMPS • SINGLE ENDED

## UMR, USD & USR


- Compact Design
- High Brightness
- Daylight Color Temperature
- Universal Burn Position

Please see Safety and Handling Instructions on page 81.




Watts	Ushio Ordering Code	Ushio Lamp Description	Volts V	Arc Gap	Nominal Dimensions mm			Luminous Flux lm	Color Temp K	Avg Life h	Base Type
					Dia (A)	LCL (B)	MOL (C)				
<b>UMR – Single Ended Metal Halide</b>											
1200	1003283	UMR-1200/PAR64/6K	100	—	204.2	—	176	85000	6000	1000	G38
<b>USD – Single Ended Metal Halide</b>											
250	5002003	USD-250/2	95	5	23	55	108	18000	8500	2000	GY9.5
<b>USR – Single Ended Metal Halide</b>											
575	5000283	USR-575/BE	95	7	30	70	145	49000	5600	750	G22
575	5002008	USR-575/2	95	7	30	65	125	44000	7800	1000	GX9.5
700	5002010	USR-700SA	70	4	30	39	85	56000	5600	750	GY9.5
1200	5000278	USR-1200 HR*	100	11	42	107	200	110000	5600	750	G38
1200	5002013	USR-1200/2	100	10	38.5	112	169	105000	7200	800	G22/30X53
2500	5000280	USR-2500 HR	115	14	60	127	240	240000	5600	500	G38
4000	5002014	USR-4000 HR*	200	20	75	127	250	380000	6000	500	G38


\* Special Order Item




UMR-1200/PAR64/6K




USD-250/2S




USR-575BE




USR-575/2




USR-700/SA




USR-1200/2

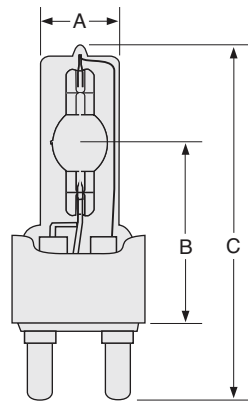

USR-1200 HR

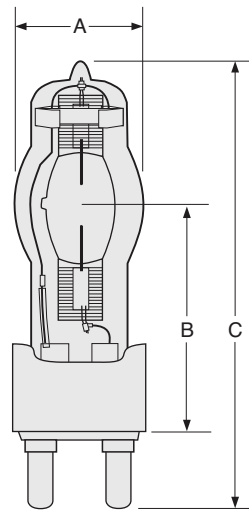

USR-2500 HR

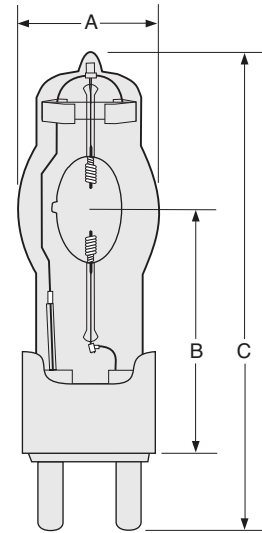

USR-4000 HR

**Hg** - LAMP CONTAINS MERCURY  
 Manage in Accord with Disposal Laws  
 See: [www.lamprecycle.org](http://www.lamprecycle.org)