
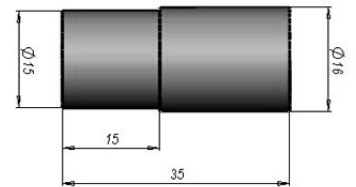
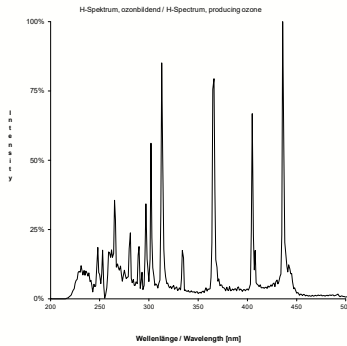


UVE 176014_P

Order No. 116133 116133

USHIO

Printing Date : 09.12.2025

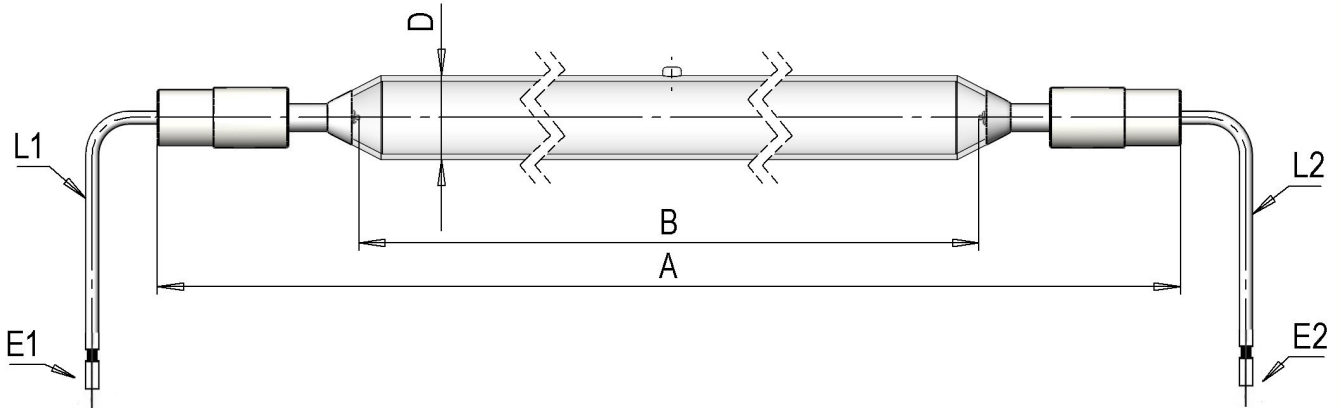

BLS-014-6

Ignition Voltage Peak:	2500 V	Lead Diameter:	1,5 mm ²
Open Circuit Voltage	2500 V	Lead Length L1/L2:	500 mm / 500 mm
Lamp Voltage:	1850 V	Lead Ends E1/E2:	none/open end
Power:	16800 W	Average Lifetime:	1500 h
Overall Length (A):	1548 mm	Max.-Seal Temperature (T):	350° C
Arc Length (B):	1420 mm	Bulb Temp. Operating Range:	
Bulb Diameter (D):	22,5 mm		
Quartz Type:	standard		

USHIO Europe B.V.
The Netherlands

Tel +31 20 446 9333

USHIO France S.A.R.L.
France

Tel +33 1-34649494

USHIO Germany GmbH
Germany

Tel +49 80 94 906 0

USHIO U.K., Ltd.
United Kingdom

Tel +44 1296 256067

URL: www.ushio.eu **Email:** uv@ushio.de