



Specification Data

公司名称	江苏恒太照明有限公司
Espen Generic Part No.	
Espen Generic Model No.	VEL80200MVHDA-10V-P-AUX (35)

客户盖章回签		
确认	审核	批准



Output	Rated Current	2000 mA		
	Operating Voltage Range (min. ~ max.)	30V-40V		
	Rated Power (Max @W)	80W		
	Output Current ripple(ripple = pk-pk/avg)	10%@2000mA		
	Start Time (Max. ms @ VAC)	≤ 750ms/120Vac/277Vac		
	Output Current Regulation (%)	+5%~-5%		
	Output Dimming Range (%)	10%~100%		

Output (Auxiliary Power Supply)	Output Voltage	12Vdc ± 5% @ Normal Mode		
	Max. Load Current	100mA		

Input	Frequency Range	47 ~ 63 Hz		
	Input Voltage Range	120 ~277VAC (±10%)		
	Power Factor (Min.)	0.9 at full load		
	THD (Max.)	20%		
	Efficiency (typ. %@120/277V at full load)	>87%		
	Input AC Current (Max. @ VAC)	0.88A @ 120VAC at full load		
	Inrush Current (Max.)	100A @277VAC (cold start, μs at 50% Ipeak)		
	Leakage Current (Max. @ VAC)	0.75mA / 277VAC		


General Specifications		Data	Notes
	Dimming Type	DC DIMMING	0~10V
Dimming Range	10% ~ 100%		
Dimming to off threshold	0.5V ± 0.1V		
Dimming on threshold	0.7V ± 0.1V		
0-10v Dimming Interface Current	<2mA		
MTBF	>200,000 hours	Measured at 120VAC, 80% load, 25°C ambient (MIL-HDBK-217F)	
Max. Case Temp.	90°C		
Life Rating	50,000 hours	Measured at 120/277VAC, 90°C Tc.	
Warranty	5-years Limited Warranty		





Protection	Type	
	Over Power	The driver always works within a safe working area power curve
	No Load Voltage (% min. ~ max.)	Vomax ~ 110% Vomax
	Short Circuit	Disconnect the power to restart after fault condition is removed
	Input Transient Protection	Power supply shall comply with IEEE C.62.41-1991,Class A operation.The line transient shall consist of seven strikes of a 100 kHz ring wave,2.5kV level for both common mode and differential mode.
	Others	SCP, OVP


Environmental	Operating Temperature (min. ~ max.)	-30 ~ +50°C
	Storage Temperature (min. ~ max.)	-40~ +80°C
	Operating Humidity	20 ~ 95% RH
	Storage Humidity	10 ~ 95% RH
	Temperature Coefficient (%/C)	±0.03% / °C (0~50°C)
	Application	For Dry and Damp location

Safety & EMC	Safety Standards	UL, cUL, UL8750 Class 2,Class P
	Audible sound Level	<24dB (30 cm)
	EMI/EMC Standards	FCC Part 15 Class B, Compliance to EN 61547/1995+A1/2000

Physical Parameters		L	W	H	M		
	Dimensions (mm)	241.8	44.5	30	228.7		
	Net Weight (g.)	560g					
	Input Leads (AWG, Length)	Line	Black single 18AWG 105°C 600V length 500mm(+/-25mm) wire stripping 10mm(+/-1mm)				
		Neutral	White single 18AWG 105°C 600V length 500mm(+/-25mm) wire stripping 10mm(+/-1mm)				
	Output Leads (Color, AWG, Length)	Positive	Red single 20AWG 105°C 600V length 800mm(+/-25mm) wire stripping 9mm(+/-1mm)				
		Negative	Blue single 20AWG 105°C 600V length 800mm(+/-25mm) wire stripping 9mm(+/-1mm)				
		Aux 12V+	Yellow single 1316 20AWG 105°C 600V length 510mm(+/-10mm) wire stripping 10mm(+/-1mm)				
		Aux 12V-	Black single 1316 20AWG 105°C 600V length 510mm(+/-10mm) wire stripping 10mm(+/-1mm)				
		Dimming+	Violet single 18AWG 105°C 600V length 800mm(+/-25mm) wire stripping 10mm(+/-1mm)				
Dimming-		Gray single 18AWG 105°C 600V length 800mm(+/-25mm) wire stripping 10mm(+/-1mm)					
Packaging		QTY/CTN		Dimensions (in.)		Weight (lbs.)	

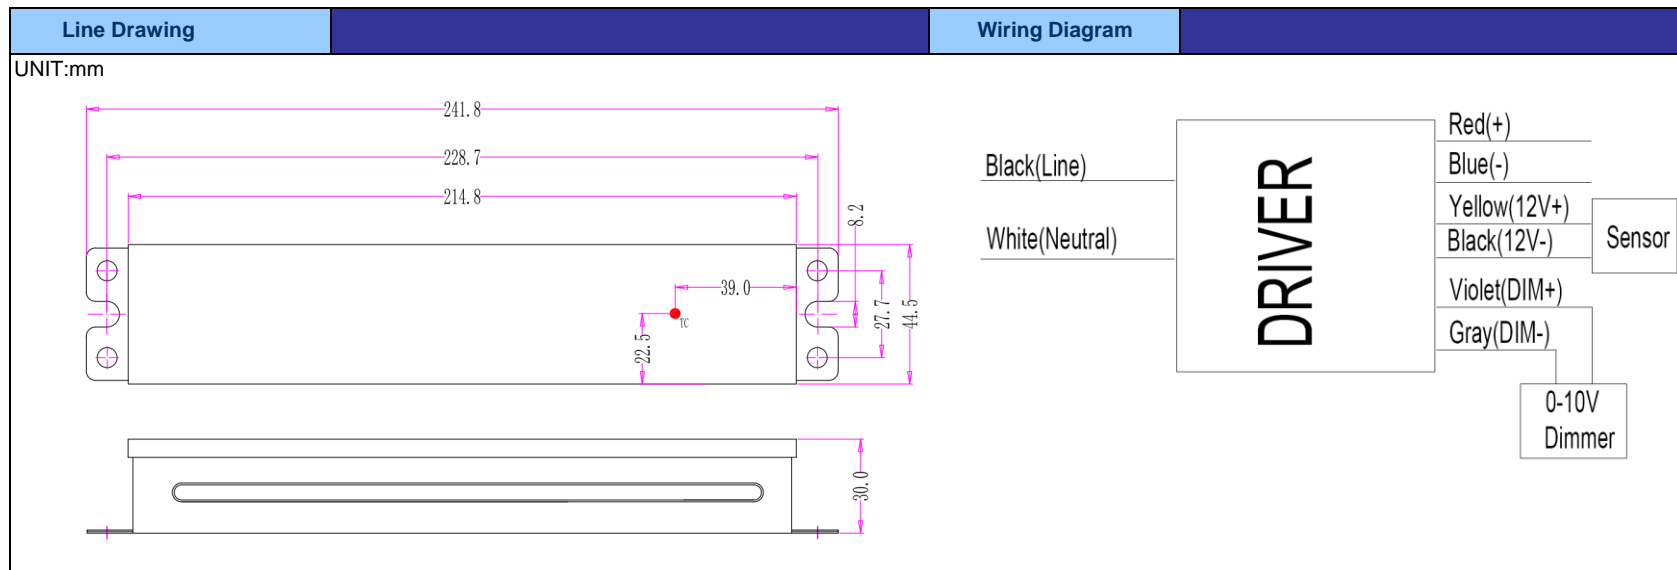

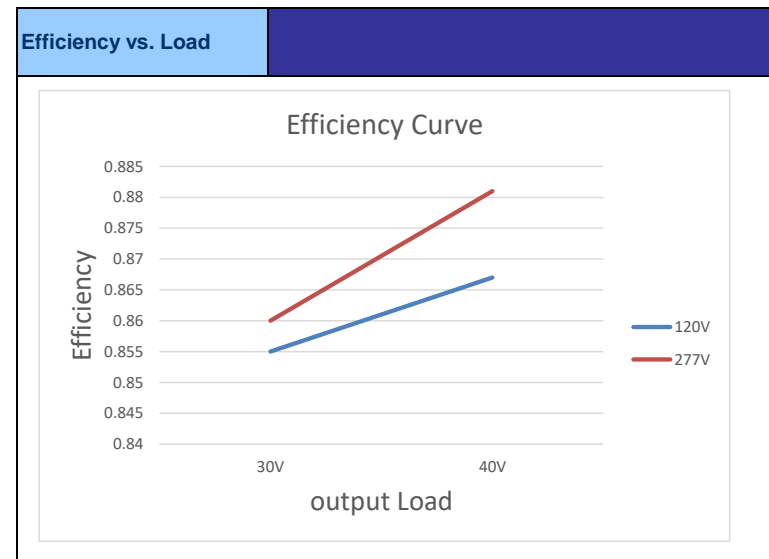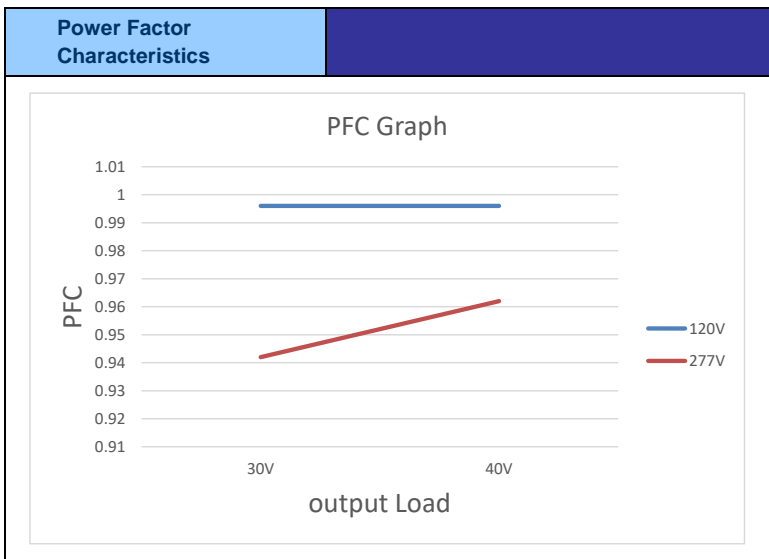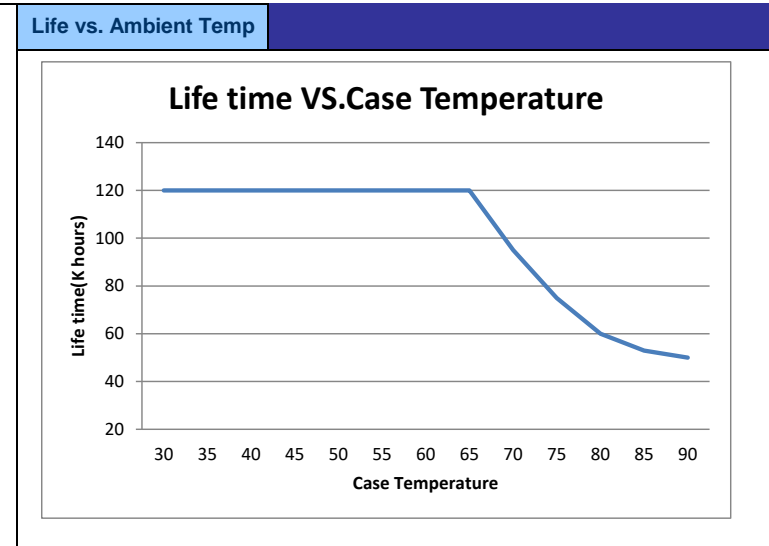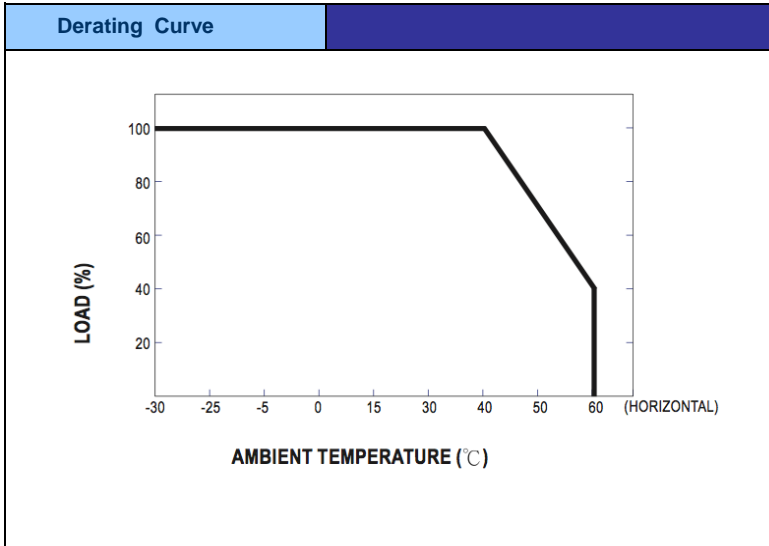

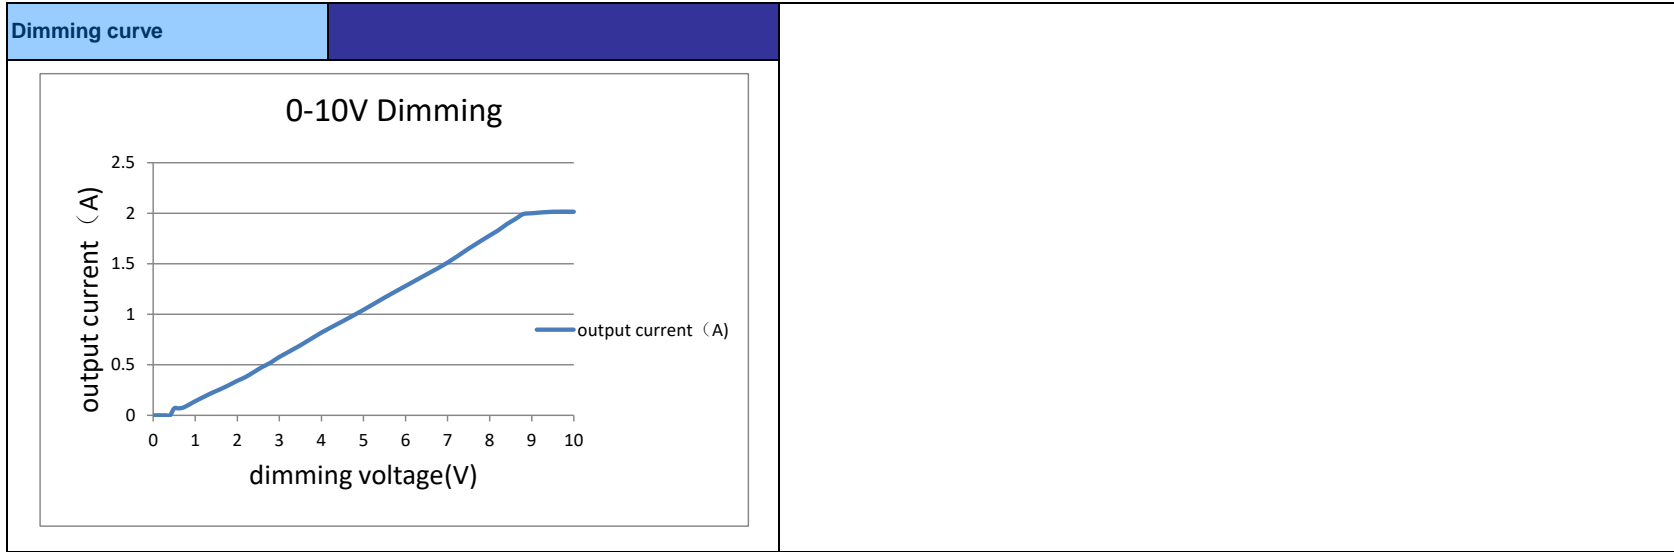

Dimmer Compatability List	Dimmer Manufacturer	Dimmer Model No.
	LUTRON	DVSTV
	LEVITON	IP710-DL