

SPECIFICATION SHEET : WH42-UNV-L

This Is An Original Product From Fulham Co., Inc

**Description : WORKHORSE Electronic Ballast.
Parallel Lamp Operation.**

*** This Ballast Will Operate The Following Lamp Types:
CFQ/4P, CFTR/4P, T5, T6SL, T8, T8SL, CFT/4P, FT/4P, T9CR, T5CR, T5HO, T8HO, T10, T12, T12SL
WHEN USED PER FULHAM'S LAMP / BALLAST WIRING DIAGRAM.**

ELECTRICAL DATA (Universal, 120 - 277V)


INPUT VOLT: 120V - 277V ± 10%, 50/60Hz	
LAMP TYPE AND NUMBER OF LAMPS	1 CFQ/4P, CFTR/4P, CFT/4P, T6SL, T8, FT/4P, T9CR, T5CR, T5HO, T8HO, T10, T12, T12SL. 2 CFQ/4P, CFTR/4P, T5, T8.
WIRING DIAGRAM #	REFER TO FULHAM'S LAMP / BALLAST WIRING DIAGRAM.
POWER FACTOR	HIGH POWER FACTOR
THD	< 10% @ FULL POWER
EMI/RFI COMPLIANCE	FCC PART 18-A
SOUND RATING	" A "
BALLAST TYPE	INSTANT START
VOLTAGE TRANSIENTS	ANSI C82.11 - 1993 / C62.41
MIN. OPERATING TEMP	0 °C (32 °F)
MAX. CASE TEMP	70 °C (158 °F)
APPROVALS/CLASS	UL LISTED, CLASS " P ", 1 OUTDOOR
* NOTE:	PLEASE CONTACT FULHAM CUSTOMER SERVICES FOR PARTICULAR LAMP/BALLAST SPECIFICATIONS.

IMAGE



NOTE : This ballast case must be grounded

MECHANICAL DATA

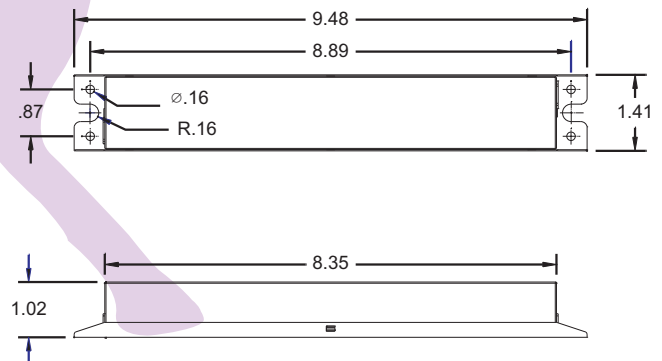

WIRE	BLACK	WHITE	RED	BLUE	YELLOW	BROWN
LENGTH - INCHES	18 ± 1"	18 ± 1"	36 ± 1"	-	36 ± 1"	-

Where : L = Length, W = Width, H = Height

Fulham extends a limited warranty only to the original purchaser or to the first user for a period of 5 years from the date of manufacture when properly installed and operated under normal conditions of use. For complete terms and conditions, please reference the Fulham product catalog (www.fulham.com)
Due to a program of continuous improvement, Fulham reserves the right to make modifications or variations in design or construction to the equipment described.